


Fioled Backlight Panel Serisi


Fioled Backlight Panel Series

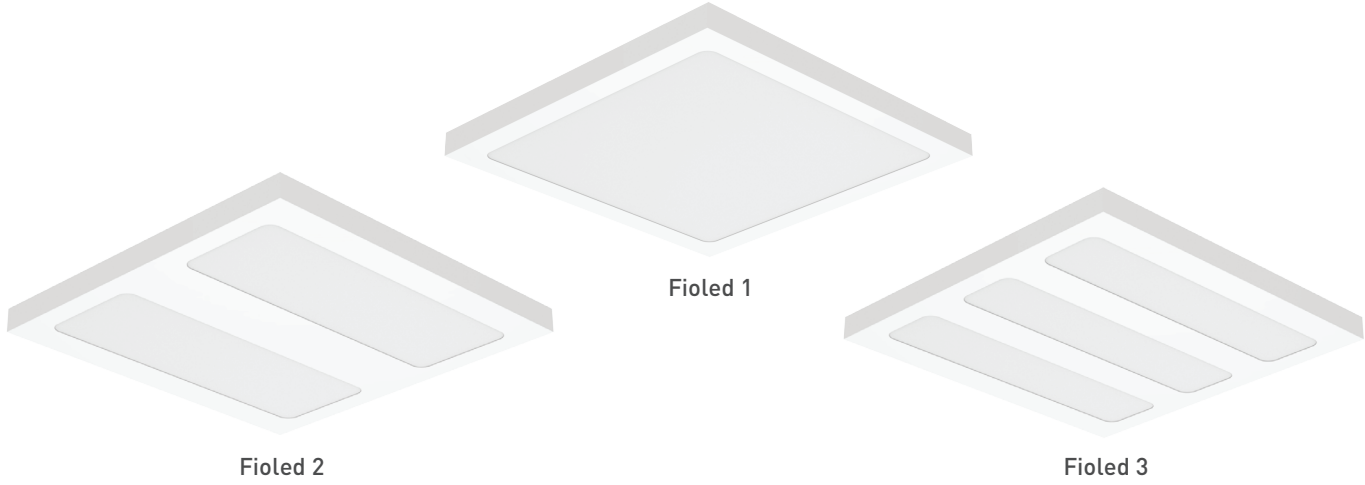


Gövde Body	Elektrostatik toz boya kaplı metal Electrostatic powder coated metal	Giriş Gerilimi Input Voltage (V)	220-240	Frekans Frequency (Hz)	50-60
LED	SMD mid power	Renk sel ger. ind. Colour Ren. In. (CRI)	>80	IP Koruma IP Protection	IP40
Optik Kapak Diffuser	UV ışınlarına dayanımlı, sararmayan yüksek ışık geçirgenliğine sahip PMMA High transmission PMMA opal cover with UV protection, non-yellowing throughout lifetime of the luminaire	Güç Faktörü Power Fac. (cos φ)	>0.95	RAL Kodu RAL Code	9016
Sürücü Driver	Pelsan marka yüksek verimli Pelsan high efficiency driver	Opsiyonlar Options	DALI ve koridor fonksiyon uygulaması. 1-10V Dim uygulaması. 3 saate kadar acil durum aydınlatma ünitesi uygulaması. İstenilen renk sıcaklığında (CCT) LED uygulaması. Farklı RAL kodlarında elektrostatik toz boya seçeneği. DALI and corridor function applications. 1-10V Dimming application. Emergency lighting unit application up to 3 hours. Production according to desired correlated colour temperature (CCT). Different RAL code electrostatic power coating.		

Işık Şiddeti Dağılım Eğrisi

Light Distribution Curve

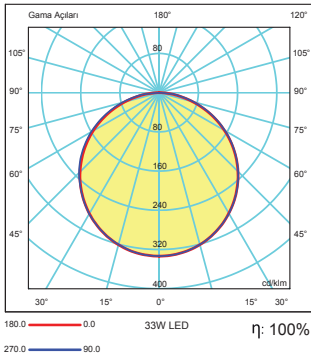

Teknik Çizim Technical Drawing

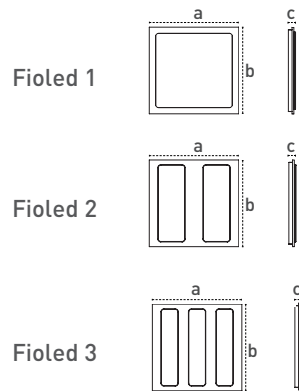

Kullanım Alanları

Fields of Application



Bakınız sayfa 204 See page 204

Armatürlere ait büyüklükler Product Details

Ürün Kodu Code No	Tip Type	Güç Power (W)	Işık Akısı Luminous Flux (lm)	Renk Sıcaklığı Colour Temp. (K)	Etkinlik Faktörü Luminous Effic. (lm/W)	Boyutlar Dimensions (mm) a b c	Koli Adedi Pcs/Pack	Koli Hacmi Package Vol. (m3)	Koli Ağırlığı Package Weight (kg)
5616 6511	Fioled 1 60x60	33	2800	4000-6500	85	595x595x56	4	0,12	15
5616 6551	Fioled 2 60x60	33	2800	4000-6500	85	595x595x56	4	0,12	15
5616 6591	Fioled 3 60x60	33	2800	4000-6500	85	595x595x56	4	0,12	15
5616 6631	Fioled 30x30	8	700	4000-6500	88	295x295x56	4	0,03	4
5616 6671	Fioled 30x60	17	1490	4000-6500	88	295x595x56	4	0,06	8
5616 6711	Fioled 30x120	30	2510	4000-6500	84	295x1195x56	4	0,12	15



EN 60598-2-1