

## Dekoled Backlight Panel Serisi


### Dekoled Backlight Panel Series




Gövde Body	Elektrostatik toz boya kaplı metal Electrostatic powder coated metal	Giriş Gerilimi Input Voltage (V)	220-240	Frekans Frequency (Hz)	50-60
LED	SMD mid power	Renk sel ger. ind. Colour Ren. In. (CRI)	>80	IP Koruma IP Protection	IP40
Optik Kapak Diffuser	UV ışınlarına dayanımlı, sararmayan yüksek ışık geçirgenliğine sahip PMMA High transmission PMMA opal cover with UV protection, non-yellowing throughout lifetime of the luminaire	Güç Faktörü Power Fac. (cos φ)	>0.95	RAL Kodu RAL Code	9016
Sürücü Driver	Pelsan marka yüksek verimli Pelsan high efficiency driver	Opsiyonlar Options	DALI ve koridor fonksiyon uygulamaları. 1-10V Dim uygulaması. 3 saate kadar acil durum aydınlatma ünitesi uygulaması. Radar sensör uygulaması. İstenilen renk sıcaklığında (CCT) LED uygulaması. Farklı RAL kodlarında elektrostatik boya uygulaması. DALI and corridor function applications. 1-10V Dimming application. Emergency lighting unit application up to 3 hours. Radar sensor application. Production according to desired correlated colour temperature (CCT) . Different RAL code electrostatic powder coating.		

### Işık Şiddeti Dağılım Eğrisi

#### Light Distribution Curve

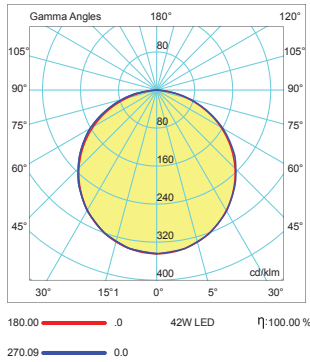

### Teknik Çizim Technical Drawing

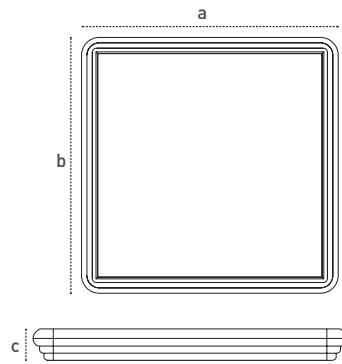

### Kullanım Alanları

#### Fields of Application



Bakınız sayfa 204 See page 204

### Armatürlere ait büyüklükler Product Details

Ürün Kodu Code No	Güç Power (W)	Işık Akısı Luminous Flux (lm)	Renk Sıcaklığı Colour Temp. (K)	Etkinlik Faktörü Luminous Effic. (lm/W)	Boyutlar Dimensions (mm) a b c	Koli Adedi Pcs/Pack	Koli Hacmi Package Vol. (m <sup>3</sup> )	Koli Ağırlığı Package Weight (kg)
5615 8650	12	1100	4000-6500	92	350x350x50	5	0,00756	1
5615 8660	17	2100	4000-6500	88	350x655x50	5	0,01782	2,7
5615 8670	33	3000	4000-6500	91	655x655x50	5	0,02917	4
5615 8641	42	3900	4000-6500	93	655x655x50	5	0,02917	4
5615 8680	42	3900	4000-6500	93	350x1265x50	4	0,03526	4,8
5615 8690	84	7700	4000-6500	92	655x1265x50	1	0,05913	8