

## Dekoled Backlight Panel Serisi


### Dekoled Backlight Panel Series




|                         |                                                                                                                                                                                        |                                             |                                                                                                                                                                                                                                            |                            |       |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------|-------|
| Gövde<br>Body           | Elektrostatik toz boya kaplı metal<br>Electrostatic powder coated metal                                                                                                                | Giriş Gerilimi<br>Input Voltage [V]         | 220-240                                                                                                                                                                                                                                    | Frekans<br>Frequency (Hz)  | 50-60 |
| LED                     | SMD mid power                                                                                                                                                                          | Renk sel ger. ind.<br>Colour Ren. In. [CRI] | >80                                                                                                                                                                                                                                        | IP Koruma<br>IP Protection | IP40  |
| Optik Kapak<br>Diffuser | UV ışınlarına dayanımlı , sararmayan yüksek ışık geçirgenliğine sahip PMMA<br>High transmission PMMA opal cover with UV protection, non-yellowing throughout lifetime of the luminaire | Güç Faktörü<br>Power Fac. (cos φ)           | >0.95                                                                                                                                                                                                                                      | RAL Kodu<br>RAL Code       | 9016  |
| Sürücü<br>Driver        | Pelsan marka yüksek verimli<br>Pelsan high efficiency driver                                                                                                                           | Opsiyonlar<br>Options                       | DALI ve koridor fonksiyon uygulaması. 1-10V Dim uygulaması. 3 saate kadar acil durum aydınlatma ünitesi uygulaması. İstenilen renk sıcaklığında (CCT) LED uygulaması. Farklı RAL kodlarında elektrostatik toz boya seçeneği                |                            |       |
|                         |                                                                                                                                                                                        |                                             | DALI and corridor function applications. 1-10V Dimming application. Emergency lighting unit application up to 3 hours. Production according to desired correlated colour temprature (CCT). Different RAL code electrostatic power coating. |                            |       |

### Işık Şiddeti Dağılım Eğrisi

#### Light Distribution Curve



### Teknik Çizim Technical Drawing

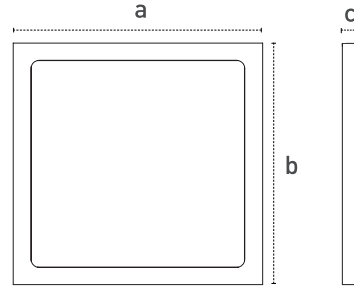

### Kullanım Alanları

#### Fields of Application



Bakınız sayfa 232 See page 232

### Armatürlere ait büyüklükler Product Details

| Ürün Kodu<br>Code No | Güç<br>Power (W) | Işık Akısı<br>Luminous Flux (lm) | Renk Sıcaklığı<br>Colour Tem. (K) | Etkinlik Faktörü<br>Luminous Effic. (lm/W) | Boyutlar<br>Dimensions (mm) a b c | Koli Adedi<br>Pcs/Pack | Koli Hacmi<br>Package Vol. (m <sup>3</sup> ) | Koli Ağırlığı<br>Package Weight (kg) |
|----------------------|------------------|----------------------------------|-----------------------------------|--------------------------------------------|-----------------------------------|------------------------|----------------------------------------------|--------------------------------------|
| 108384               | 12               | 1100                             | 6500                              | 92                                         | 295x295x54,5                      | 5                      | 0,037                                        | 5                                    |
| 108481               | 17               | 1700                             | 6500                              | 100                                        | 330x595x54,5                      | 5                      | 0,0726                                       | 10                                   |
| 108462               | 33               | 3300                             | 6500                              | 100                                        | 595x595x54,5                      | 5                      | 0,1329                                       | 20                                   |
| 108303               | 33EU             | 3300                             | 6500                              | 100                                        | 595x595x54,5                      | 5                      | 0,1329                                       | 20                                   |
| 108480               | 33EU Performance | 4100                             | 6500                              | 124                                        | 595x595x54,5                      | 5                      | 0,1329                                       | 20                                   |
| 108511               | 42               | 3780                             | 6500                              | 90                                         | 595x595x54,5                      | 5                      | 0,1329                                       | 20                                   |
| 108482               | 33               | 3300                             | 6500                              | 100                                        | 330x1100x54,5                     | 4                      | 0,1076                                       | 20                                   |
| 108483               | 42               | 3780                             | 6500                              | 90                                         | 330x1100x54,5                     | 4                      | 0,1076                                       | 20                                   |



EN 60598-2-1