


## Seoled Backlight Panel Serisi


### Seoled Backlight Panel Series

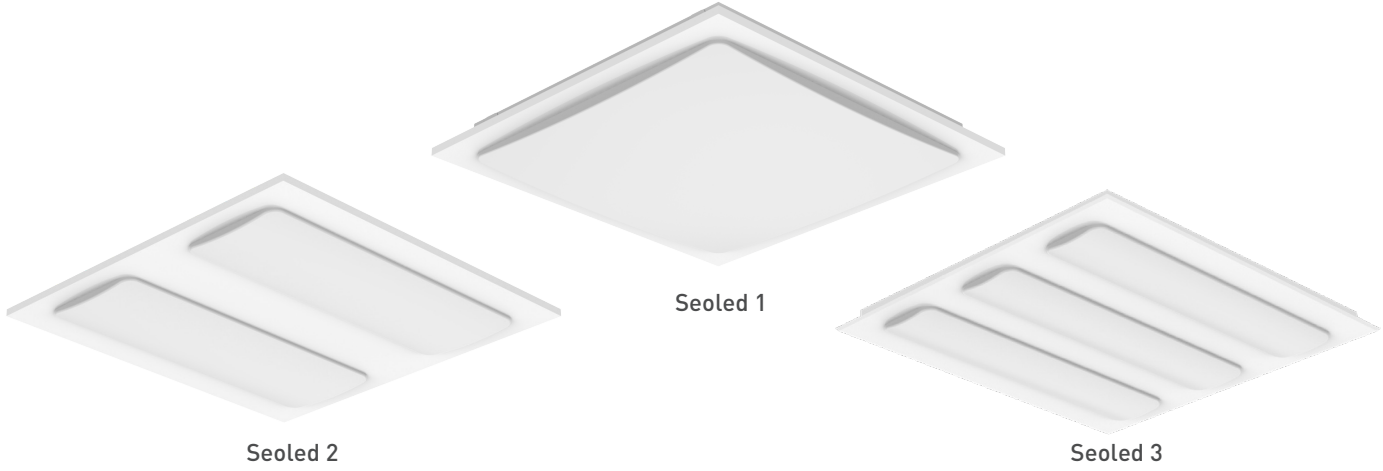


Gövde Body	Elektrostatik toz boya kaplı metal Electrostatic powder coated metal	Giriş Gerilimi Input Voltage (V)	220-240	Frekans Frequency (Hz)	50-60
LED	SMD mid power	Renk sel ger. ind. Colour Ren. In. (CRI)	>80	IP Koruma IP Protection	IP40
Optik Kapak Diffuser	UV ışınlarına dayanımlı , sararmayan yüksek ışık geçirgenliğine sahip PMMA High transmission PMMA opal cover with UV protection, non-yellowing throughout lifetime of the luminaire	Güç Faktörü Power Fac. (cos φ)	>0.95	RAL Kodu RAL Code	9016
Sürücü Driver	Pelsan marka yüksek verimli Pelsan high efficiency driver	Opsiyonlar Options	DALI ve koridor fonksiyon uygulaması. 1-10V Dim uygulaması. 3 saate kadar acil durum aydınlatma ünitesi uygulaması. İstenilen renk sıcaklığında (CCT) LED uygulaması.Farklı RAL kodlarında elektrostatik toz boya seçeneği. DALI and corridor function applications.1-10V Dimming application. Emergency lighting unit application up to 3 hours. Production according to desired correlated colour temperature (CCT). Different RAL code electrostatic power coating.		

### Işık Şiddeti Dağılım Eğrisi

#### Light Distribution Curve

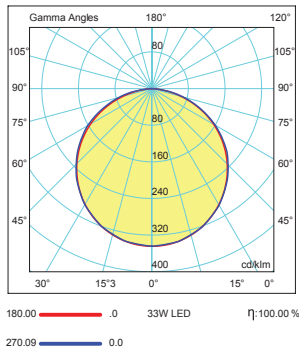

### Teknik Çizim Technical Drawing

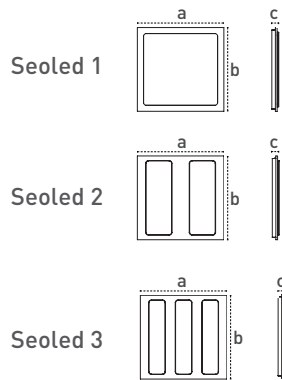

### Kullanım Alanları

#### Fields of Application



Bakınız sayfa 232 See page 232

### Armatürlere ait büyüklükler Product Details

Ürün Kodu Code No	Tip Type	Güç Power (W)	Işık Akısı Luminous Flux (lm)	Renk Sıcaklığı Colour Temp. (K)	Etkinlik Faktörü Luminous Effic. (lm/W)	Boyutlar Dimensions (mm) a b c	⊞ (mm)	Koli Adedi Pcs/Pack	Koli Hacmi Package Vol. (m <sup>3</sup> )	Koli Ağırlığı Package Weight (kg)
106697	Seoled 1 60x60	33	2800	6500	85	595x595x67	580x580	4	0,12	15
106713	Seoled 2 60x60	30	2600	6500	87	595x595x67	580x580	4	0,12	15
106725	Seoled 3 60x60	30	2500	6500	84	595x595x67	580x580	4	0,12	15
106737	Seoled 30x30	8	700	6500	88	295x295x67	280x280	4	0,03	4
106753	Seoled 30x60	17	1490	6500	88	595x295x67	280x580	4	0,06	8
106769	Seoled 30x120	30	2510	6500	84	1195x295x67	280x1180	4	0,12	15