


Piroliz LED Kanopi Armatürler

Ana Ölçüler / Montaj Ölçüleri


Gövde	Alüminyum Enjeksiyon
LED	Mid Power
Optik	IK 08 koşullarını sağlayan, suya ve darbelere karşı dayanıklı, şeffaf temperli cam
Opsiyonlar	Yüksek verimli LED Sürücü



	axbxc
75W	395x395x131mm
100W	395x395x131mm
125W	395x395x131mm

Ürün Kodu	Güç (W)	Tip	Işık Akısı (lm)	Renk Sıcaklığı (K)	Verimlilik (lm/W)	Güç Faktörü (Cos)	Ağırlık (Kg)	Ral Kodu
109937	75	Piroliz LED	8625	3000/4000/6500	115	> 0,98	5	9016
109938	100	Piroliz LED	11000	3000/4000/6500	110	> 0,98	5	9016
109939	125	Piroliz LED	13125	3000/4000/6500	105	> 0,98	5	9016

Piroliz LED Kanopi Armatürler MONTAJ ŞARTNAMESİ

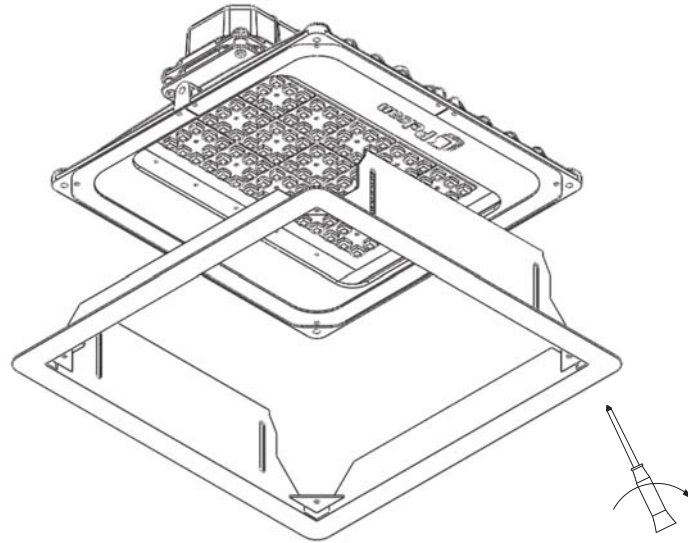

- Armatürün çalışma gerilimi ile şebeke gerilimi aynı olmalıdır. (230V/50-60Hz)
- Armatürün elektriksel bağlantısı yapılmadan önce mutlaka şebekenin gerilimi ve bağlantı çalışmaları yapıldığına dair pano üzerine bir levha asılmalıdır.
- Ardından sağlam bir zemine konsol üzerindeki delikler yardımı ile konsolun bağlantısını yapınız.
- Bağlantı kablosunda güvenlik açısından ek olmaması gerekmektedir.
- Bağlantıların doğru olup olmadığını kontrol ediniz.
- Armatüre enerji veriniz.

Güvenlik Uyarıları!


- Armatür montajını deneyimli ve ehliyetli bir elektrikçiye yaptırınız.
- Kurulum ve bakım işlemlerinden önce şebeke elektriğini kesiniz.
- Armatörü temizlerken nemli bir bez kullanınız.

- Kesinlikle tiner ve benzeri yanıcı, zarar verici malzemeler kullanmayınız.
- Ürünü 230 V AC / 50-60 Hz şebeke geriliminde kullanınız.
- Bağlantıların sıkı ve doğru olup olmadığını kontrol ediniz.

Piroliz LED Canopy Luminaires

Main Dimensions / Installation Dimensions


Body	Aluminum Injection
LED	Mid Power / Power LED
Optic	IK 80 standard compliant, heat and impact resistant, high transmission, clear tempered glass
Options	High efficient LED driver



axbxc	
75W	395x395x131mm
100W	395x395x131mm
125W	395x395x131mm

Product Code	Power (W)	Type	Luminous Flux (lm)	Colour Temp. (K)	Luminous Efficacy (lm/W)	Power Factor	Weight (Kg)	Ral Code
109937	75	Piroliz LED	8625	3000/4000/6500	115	> 0,98	5	9016
109938	100	Piroliz LED	11000	3000/4000/6500	110	> 0,98	5	9016
109939	125	Piroliz LED	13125	3000/4000/6500	105	> 0,98	5	9016

Piroliz LED Canopy Luminaires INSTALLATION SPECIFICATIONS

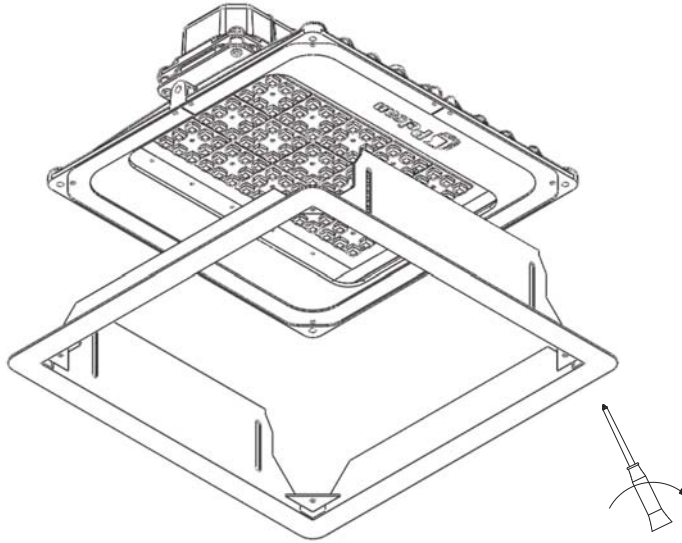

- The working of the voltage must be the same as the line voltage (230/50-60Hz)
- Before making electric bonding of the fixture, the plate must be mounted on the panel about the working of the line voltage and the connection
- Make the connection of the consol with the aid of on the durable ground.
- Based on the security, it shall not be the addition on the connection cable.
- Conrol the connection is correct or not.
- Give energy to the fixture.

Safety Warnings!

- Get the luminaire installed by an experienced and qualified electrician.
- DO NOT use thinner or similar flammable, harmful materials.
- CUT OFF the mains power before you start installation or maintenance.
- OPERATE the product under 230 V AC / 50-60 Hz mains power.
- Use a damp cloth while cleaning the luminaire.
- CHECK whether the connections are firm/tight and accurate.