


Franko 150W-200W-250W
Franko 150W-200W-250W




Gövde Body	Elektrostatik toz boyalı alüminyum enjeksiyon Electrostatic powder coated aluminium injection	Giriş Gerilimi Input Voltage (V)	220-240	Frekans Frequency (Hz)	50-60
LED	SMD	Renk sel ger. ind. Colour Ren. In. (CRI)	>80	IP Koruma IP Protection	IP65
Reflektör Reflector	Simetrik, Alüminyum, UV dayanımlı Symmetric, Aluminium, UV protection	Güç Faktörü Power Fac. (cos φ)	>0.90	RAL Kodu RAL Code	9005
Optik Kapak Diffuser	Temperli cam Tempered glass				
Sürücü Driver	Pelsan marka yüksek verimli Pelsan high efficiency driver				

Işık Şiddeti Dağılım Eğrisi
Light Distribution Curve

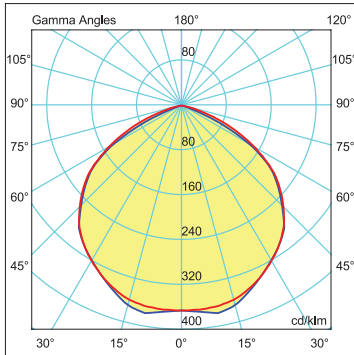

180.0 — 0.0 200W LED η:100.00%
270.0 — 90.0

Teknik Çizim Technical Drawing

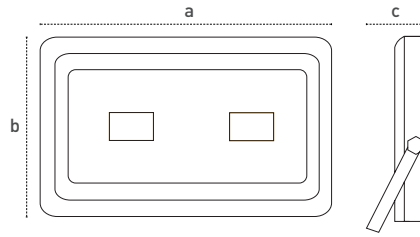

Kullanım Alanları
Fields of Application



Bakınız sayfa 204 See page 204

Armatürlere ait büyüklükler Product Details

Ürün Kodu Code No	Tip Type	Güç Power (W)	Işık Akısı Luminous Flux (lm)	Renk Sıcaklığı Colour Temp. (K)	Etkinlik Faktörü Luminous Effic. (lm/W)	Boyutlar Dimensions (mm) a b c	Koli Adedi Pcs/Pack	Koli Hacmi Package Vol. (m ³)	Koli Ağırlığı Package Weight (kg)
5617 1371	Franko	150	13200	5000	88	420x320x160	2	0,022	12,2
5617 1372	Franko-EU	150	14950	4000-6500	99	420x320x160	2	0,022	12,3
5617 1381	Franko	200	17600	5000	88	520x320x160	1	0,029	9
5617 1391	Franko	250	22000	5000	88	600x320x180	1	0,034	10



EN 60598-2-5