





Teknik Çizim

Technical Drawing



Bağlantı Şeması

Connection Scheme

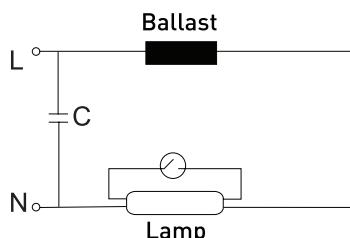

Balastlar Ballasts

Kompakt Floresan Balastlar

Compact Fluorescent Ballasts

Özellikler

- Düşük watt kayıplı silisli sac ve otomatik paketleme sistemi sayesinde sessiz çalışma
- İletkenliği yüksek H sınıfı emaye kaplı bakır telleri ile uzun ömür ve düşük güç kaybı
- Yanmaz plastik aksan
- Üretim prosesi boyunca etkin kalite kontrol denetimi yapılarak eksiksiz ve hatalı üretim
- Rutubetten, UV ışınlarından, tozdan etkilenmeyen izolasyon verniğiyle korozya karşı koruma
- Yüksek frekans yayamasından dolayı elektromanyetik uyumluluk

Opsiyonlar

Farklı gerilim(220/230/240) ve frekanslarda(50/60Hz) üretim 8 / 11W balastlar için 110/120 V üretim

Specifications

- Low watt-loss, quiet operation thanks to siliceous sheet and automatic packaging system
- Long-lifetime and low-loss with highly conductive H-class enamelled copper wires
- Non-flammable plastic components
- Effective quality control throughout the production process ensuring complete and fault-free production
- Protection against corrosion with moisture, ozone and dust proof insulating varnish
- Does not emit high frequency waves and thus problem-free in terms of electromagnetic compatibility and harmless to human and animal life

Options

- Production in different voltages (220 / 230 / 240) and frequencies (50 / 60Hz)
- 110 / 120 V production for 8 / 11W ballasts

Ürün Özellikleri Product Details

Ürün Kodu Code No	Tip Type	Güç Power (W)	Gerilim Voltage (V)	Akım Current (A)	Lamba Tipi Lamp Type	Kondansatör Capacitor ($\mu\text{F} \pm 10$ 250 V)	Güç Faktörü Power Factor	Boyutlar Dimensions (mm) a b c d	Ağırlık Weight (kg)	Hacim Volume (m^3)	Koli Adedi Pcs/Pack
5911 3211	İnce	8 W	230	0.175	TL Mini 4	2	0.26	115x29x26x104	16.5	0.004784	54
	İnce			0.160	TL Mini 6	2	0.33				
	İnce			0.145	TL Mini 8	2	0.39				
591 3331	İnce	11 W	230	0.180	PL-S 5	2.2	0.28	115x29x26x104	16.5	0.004784	54
	İnce			0.180	PL-S 7	2.1	0.32				
	İnce			0.170	PL-S 9	2	0.36				
	İnce			0.155	PL-S 11	1.7	0.47				
5911 3221	İnce	10-13 W	230	0.190	PL-C 10	2.2	0.37	115x29x26x104	16.5	0.004784	54
	İnce			0.165	TL Mini 13	2	0.46				
	İnce			0.170	PL-C 13	1.8	0.47				
	İnce			0.170	PL-T 13	1.8	0.47				
5911 3181	İnce	18 W	230	0.220	PL-C 18	2.2	0.46	115x29x26x104	16.5	0.004784	54
	İnce			0.220	PL-T 18	2.3	0.46				