

Yer Gömme Armatürler
Recessed Floor Luminaires

Monoled



Duoled



Tetraled




Multiled



Teknik Çizim

Technical Drawing

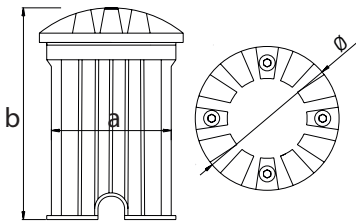

Mekanik Özellikler

Elektrostatik toz boyalı Alüminyum enjeksiyon gövde. Sıva altı kullanım. Paslanmaz çerçeve

Optik Özellikler

Yüksek ışık geçirgenliğine ve homojen yayılıma sahip buzlu cam.

Elektriksel Özellikler

Sabit akım çıkışlı, yüksek verimliliğe sahip LED sürücü. Şebeke gerilimindeki dalgalanmalardan etkilenmeyen ve sabit ışık sağlayan etkin güç faktörü düzeltmesi ile birlikte Kısa devre koruması ve termal koruma entegrasyon özellikleri olan LED Sürücü. Isıl iletkenliği yüksek PCB. 2,5mm² kesitli kablo montajına uygun yanmaz çıkış klemensi.

Mechanical Specifications

Aluminium injection frame with electrostatic powder coating. Recessed Mounted applications. Stainless frame.

Optical Specifications

High transmission frosted glass optical cover with homogenous light distribution, non-yellowing and non-discolouring throughout lifetime of the luminaire.

Electrical Specifications

Constant current, high efficiency LED driver. Efficient power factor correction immune to fluctuations in grid voltage and providing constant light output. PCB with high thermal conductivity. Short circuit protection and thermal protection integration. Non-flammable connector terminal suitable for 2,5mm² cross-sectioned cable installation

Kullanım Alanları

Fields of Application



LED Armatürlere ait büyüklükler Product Details

Ürün Kodu Code No	Güç Power (W)	Renksel Geriverim Colour Rendering Index	Lamba Tipi Lamp Type	Güç Faktörü Power Factor (cos)	Boyutlar Dimensions (mm) a b c	Ağırlık Weight (kg)	Hacim Volume (m ³)	Duy Base	Koli Adedi Pcs/Pack	Ral Kodu Ral Code
5730 2510	1x3W	>70	LED	>95	159x90x108	20	0,054	GU10	24	9005
5732 2520	1x3W	>70	LED	>95	159x90x108	20	0,054	GU10	24	9005
5732 2530	1x3W	>70	LED	>95	159x90x108	20	0,054	GU10	24	9005
5732 2540	1x3W	>70	LED	>95	159x90x108	20	0,054	GU10	24	9005