

WE WANTED YOU TO KNOW FIRST!

NEW

Other Products

Linea LED

LED Bar
Flush Mounted

IP20 SMD
LED Strip

IP55 SMD
LED Strip

LED Bar
Surface Mounted

LED Bar
Corner



Inovalet IP65
Wallwasher



Head Office

İmes Sanayi Sitesi A Blok 101/38 Ümraniye/İstanbul
Tel. +90 216 466 10 10 (pbx) Fax. +90 216 364 60 15

Factory

Nato Yolu Cad. Emek Mah. No:280 Sancaktepe/İstanbul
Tel. +90 216 540 66 71-72 Fax. +90 216 540 66 79

export@pelsan.com.tr
info@pelsan.com.tr
www.pelsan.com.tr



Inovaled IP65 Wallwasher

Produced in Turkey according to your needs and projects, Inovaled IP65 Wallwasher offers fast and unlimited options


100%
Made in
Turkey

Our innovative product Inovaled Wallwasher designed by our R&D Department comes with 15w-30w-45w options. Anodised aluminium extruded body can withstand to outdoor conditions for many years. The air ventilation system exports the moisture occurring due to heat exchange inside the luminaire. This property lengthens the LED and electronic component life time.

Inovaled has narrow, medium and wide angle lens options. It offers the ideal solution for wallwasher applications by providing homogeneous light distribution with its special double-angle lens technology.

3000K / 4000K / 6500K color temperature options in addition to Blue, Red, Amber, Green, and RGB color options.


Surface Mounted Wallwasher 12 LED's

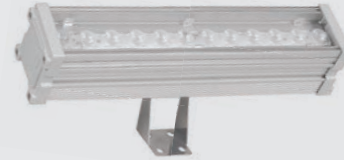

Surface Mounted Wallwasher 24 LED's



Surface Mounted Wallwasher 36 LED's

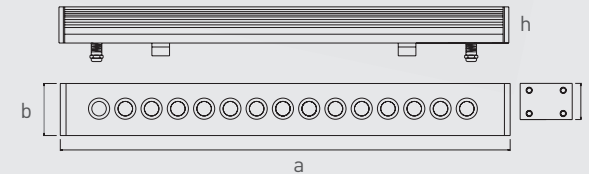

Technical Drawing
axbxcxh mm
15W 342x66x69x140
30W 640x66x69x140
45W 942x66x69x140

Product Code	Power (W)	LED	Voltage (V)	Frequency (Hz)	LED Colour	Angle
5614 1011	15	12	220-240	50-60	R/G/B/W	15°
5614 1041	15	12	220-240	50-60	R/G/B/W	30°
5614 1071	15	12	220-240	50-60	R/G/B/W	45°+20°
5614 1021	30	24	220-240	50-60	R/G/B/W	15°
5614 1051	30	24	220-240	50-60	R/G/B/W	30°
5614 1081	30	24	220-240	50-60	R/G/B/W	45°+20°
5614 1031	45	36	220-240	50-60	R/G/B/W	15°
5614 1061	45	36	220-240	50-60	R/G/B/W	30°
5614 1091	45	36	220-240	50-60	R/G/B/W	45°+20°

Body: Aluminium extruded

LED: SMD Mid Power

Lens: UV protection PMMA

Diffuser: Polycarbonate

Gasket: Silicone

Driver: Pelsan high efficiency driver

Options:

- Narrow, medium and wide-angle lens option
- Dual-row LED option
- 30cm, 60cm, 90cm size option
- 3000K/4000K/6500K blue, red, amber, green and RGB color option