

Isoled Backlight Panel Serisi


Isoled Backlight Panel Series




Gövde Body	Elektrostatik toz boya kaplı metal Electrostatic powder coated metal	Giriş Gerilimi Input Voltage (V)	220-240	Frekans Frequency (Hz)	50-60
LED	SMD mid power	Renk sel ger. ind. Colour Ren. In. (CRI)	>80	IP Koruma IP Protection	IP40
Optik Kapak Diffuser	UV ışınlarına dayanımlı , sararmayan yüksek ışık geçirgenliğine sahip PMMA High transmission PMMA opal cover with UV protection, non-yellowing throughout lifetime of the luminaire	Güç Faktörü Power Fac. (cos φ)	>0.95	RAL Kodu RAL Code	9016
Sürücü Driver	Pelsan marka yüksek verimli Pelsan high efficiency driver	Opsiyonlar Options	DALI ve koridor fonksiyon uygulaması. 1-10V Dim uygulaması. 3 saate kadar acil durum aydınlatma ünitesi uygulaması. İstenilen renk sıcaklığında (CCT) LED uygulaması. DALI and corridor function applications. 1-10V Dimming application. Emergency lighting unit application up to 3 hours. Production according to desired correlated colour temperature (CCT).		

Işık Şiddeti Dağılım Eğrisi

Light Distribution Curve

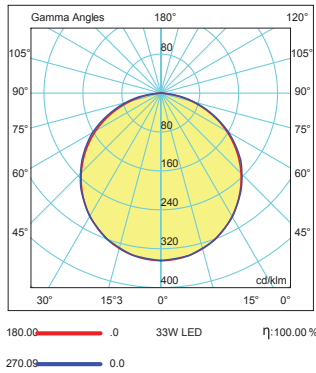

Teknik Çizim Technical Drawing

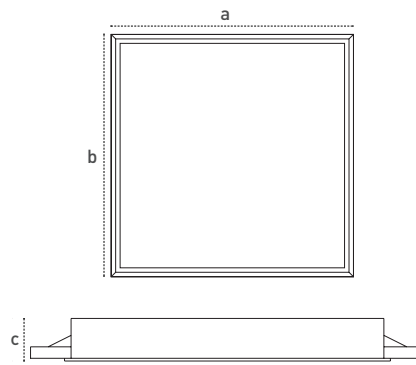


Kullanım Alanları

Fields of Application



Armatürlere ait büyüklükler Product Details

Ürün Kodu Code No	Güç Power (W)	Işık Akısı Luminous Flux (lm)	Renk Sıcaklığı Colour Tem. (K)	Etkinlik Faktörü Luminous Effic. (lm/W)	Boyutlar Dimensions (mm) a b c	 (mm)	Koli Adedi Pcs/Pack	Koli Hacmi Package Vol. (m3)	Koli Ağırlığı Package Weight (kg)
5615 8750	12	1100	4000-6500	92	295x295x50	275x275	5	0,0316	7
5615 8760	17	1440	4000-6500	90	595x295x50	575x275	4	0,0510	7,6
5615 1050	20	1700	4000	90	300x300x42	295x295	20	0,096768	7
5615 1060	20	1700	6500	90	300x300x42	295x295	20	0,096768	7
5615 3011	33	3102	4000-6500	94	595x595x60	588x588	5	0,1980	15
5615 8780	33	2950	4000-6500	90	1195x295x50	1175x275	4	0,2160	12,8
5615 8770	42	3906	4000-6500	93	595x595x50	575x575	5	0,1980	15