

Isoled Backlight Panel Serisi


Isoled Backlight Panel Series




Gövde Body	Elektrostatik toz boya kaplı metal Electrostatic powder coated metal	Giriş Gerilimi Input Voltage [V]	220-240	Frekans Frequency [Hz]	50-60
LED	SMD mid power	Renksel ger. ind. Colour Ren. In. [CRI]	>80	IP Koruma IP Protection	IP40
Optik Kapak Diffuser	UV ışınlarına dayanımlı , sararmayan yüksek ışık geçirgenliğine sahip PMMA High transmission PMMA opal cover with UV protection, non-yellowing throughout lifetime of the luminaire	Güç Faktörü Power Fac. [cosφ]	>0.95	RAL Kodu RAL Code	9016
Sürücü Driver	ENEC belgeli ENEC certified	Opsiyonlar Options	DALI ve koridor fonksiyon uygulamaları. 1-10V Dim uygulaması. 3 saate kadar acil durum aydınlatma ünitesi uygulaması. İstenilen renk sıcaklığında [CCT] LED uygulaması. DALI and corridor function applications. 1-10V Dimming application. Emergency lighting unit application up to 3 hours. Production according to desired correlated colour temperature [CCT].		

Işık Şiddeti Dağılım Eğrisi

Light Distribution Curve

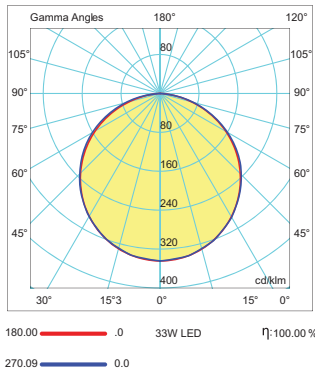

Teknik Çizim Technical Drawing

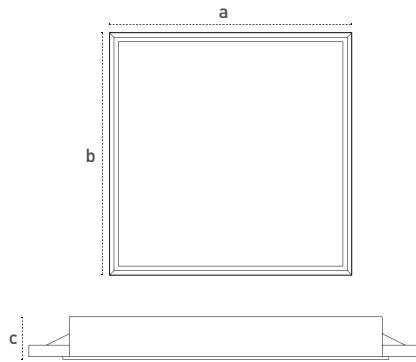

Kullanım Alanları

Fields of Application



Bakınız sayfa 232 See page 232

Armatürlere ait büyüklükler Product Details

Ürün Kodu Code No	Güç Power (W)	Işık Akısı Luminous Flux (lm)	Renk Sıcaklığı Colour Temp. (K)	Etkinlik Faktörü Luminous Effic. (lm/W)	Boyutlar Dimensions (mm) a b c	(mm)	Koli Adedi Pcs/Pack	Koli Hacmi Package Vol. (m ³)	Koli Ağırlığı Package Weight (kg)
108417	28	2850	6500	102	595x595x60	588x588	5	0,198	15
105659	33	3300	6500	100	595x595x60	588x589	5	0,198	15
105679	42	3910	6500	93	595x595x60	588x590	5	0,198	15
108420	28	3500	6500	125	595x595x60	588x591	5	0,198	15
108471	33	4100	6500	124	595x595x60	588x592	5	0,198	15
108470	42	4740	6500	113	595x595x60	588x593	5	0,198	15
106163	12	1100	6500	92	295x295x50	275x275	5	0,0316	7
106171	17	1700	6500	100	295x595x50	275x575	4	0,051	7,6
108950	33	3300	6500	100	295x1195x50	275x1175	4	0,216	12,8
108951	84	7810	6500	93	595x1195x50	575x1175	1	0,108	6