



Pialed Serisi

Pialed Series



Gvde Body	Alminyum Aluminium	Giriř Gerilimi Input Voltage (V)	220-240	Frekans Frequency (Hz)	50-60
LED	SMD Mid power	Renksel ger. ind. Colour Ren. In. (CRI)	>80	IP Koruma IP Protection	IP54
Optik Kapak Diffuser	Buzlu cam Frosted glass	Gç Faktr Power Fac. (cos ϕ)	>0.95	RAL Kodu RAL Code	9022
Src Driver	Pelsan marka yksek verimli Pelsan high efficiency driver				

Teknik Çizim Technical Drawing

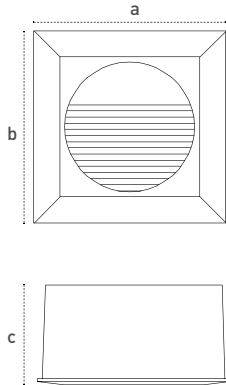

Kullanım Alanları Fields of Application



Bakınız sayfa 232 See page 232

Armatrlere ait byklkler Product Details

rn Kodu Code No	Gç Power (W)	Renk Sıcaklıđı Colour Temp. (K)	Boyutlar Dimensions (mm) a b c	 (mm)	Koli Adedi Pcs/Pack	Koli Hacmi Package Vol. (m3)	Koli Ađırlıđı Package Weight (kg)
204441	1,4	6500	125x125x65	115	24	0,036	8,6



EN 60598-2-2