


**Franko 150W-200W-250W**  
Franko 150W-200W-250W




Gövde Body	Elektrostatik toz boyalı alüminyum enjeksiyon Electrostatic powder coated aluminium injection	Giriş Gerilimi Input Voltage (V)	220-240	Frekans Frequency (Hz)	50-60
LED	SMD	Renk sel ger. ind. Colour Ren. In. (CRI)	>80	IP Koruma IP Protection	IP65
Reflektör Reflector	Simetrik, Alüminyum, UV dayanımlı Symmetric, Aluminium, UV protection	Güç Faktörü Power Fac. (cos φ)	>0.90	RAL Kodu RAL Code	9005
Optik Kapak Diffuser	Temperli cam Tempered glass				
Sürücü Driver	Pelsan marka yüksek verimli Pelsan high efficiency driver				

**Işık Şiddeti Dağılım Eğrisi**  
Light Distribution Curve

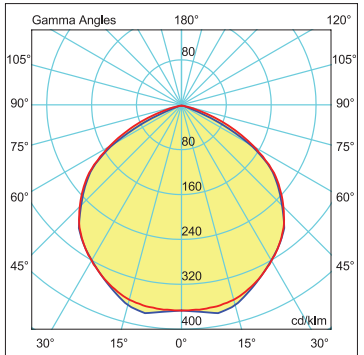

180.0 — 0.0 200W LED η:100.00%  
270.0 — 90.0

**Teknik Çizim Technical Drawing**

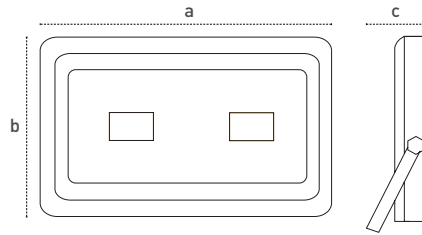

**Kullanım Alanları**  
Fields of Application



**Armatürlere ait büyüklükler Product Details**

Ürün Kodu Code No	Tip Type	Güç Power (W)	Işık Akısı Luminous Flux (lm)	Renk Sıcaklığı Colour Tem. (K)	Etkinlik Faktörü Luminous Effic. (lm/W)	Boyutlar Dimensions (mm) a b c	Koli Adedi Pcs/Pack	Koli Hacmi Package Vol. (m <sup>3</sup> )	Koli Ağırlığı Package Weight (kg)
5617 1371	Franko	150	13200	5000	88	320x420x166	2	0,022	12,2
5617 1372	Franko-EU	150	14950	4000-6500	99	320x420x166	2	0,022	12,3
5617 1381	Franko	200	17600	5000	88	320x520x160	1	0,029	9
5617 1391	Franko	250	22000	5000	88	320x600x180	1	0,034	10