



Brief Catalogue 2024-25

 **Indoor
Luminaires**

 **Outdoor
Luminaires**

 **Industrial
Luminaires**



41
bright years



Since
1982



More than
3500 SKU's



500
Employees



5 million luminaires
production capacity per year



Factory

● Electronic Assembly Line

● Plastic Injection Moulding Area

● Semi-finished Goods Process Area

● Moulding Area

● Diffuser Treatment Area

● Landscape Lighting Fixture Parts
Manufacturing Area

● Glass Reinforced
Plastic (GRP) Product
Manufacturing Area


● Powder Coating &
Painting Area

● Assembly Line

● Offices



30000 ^{m²} **Manufacturing Zone**

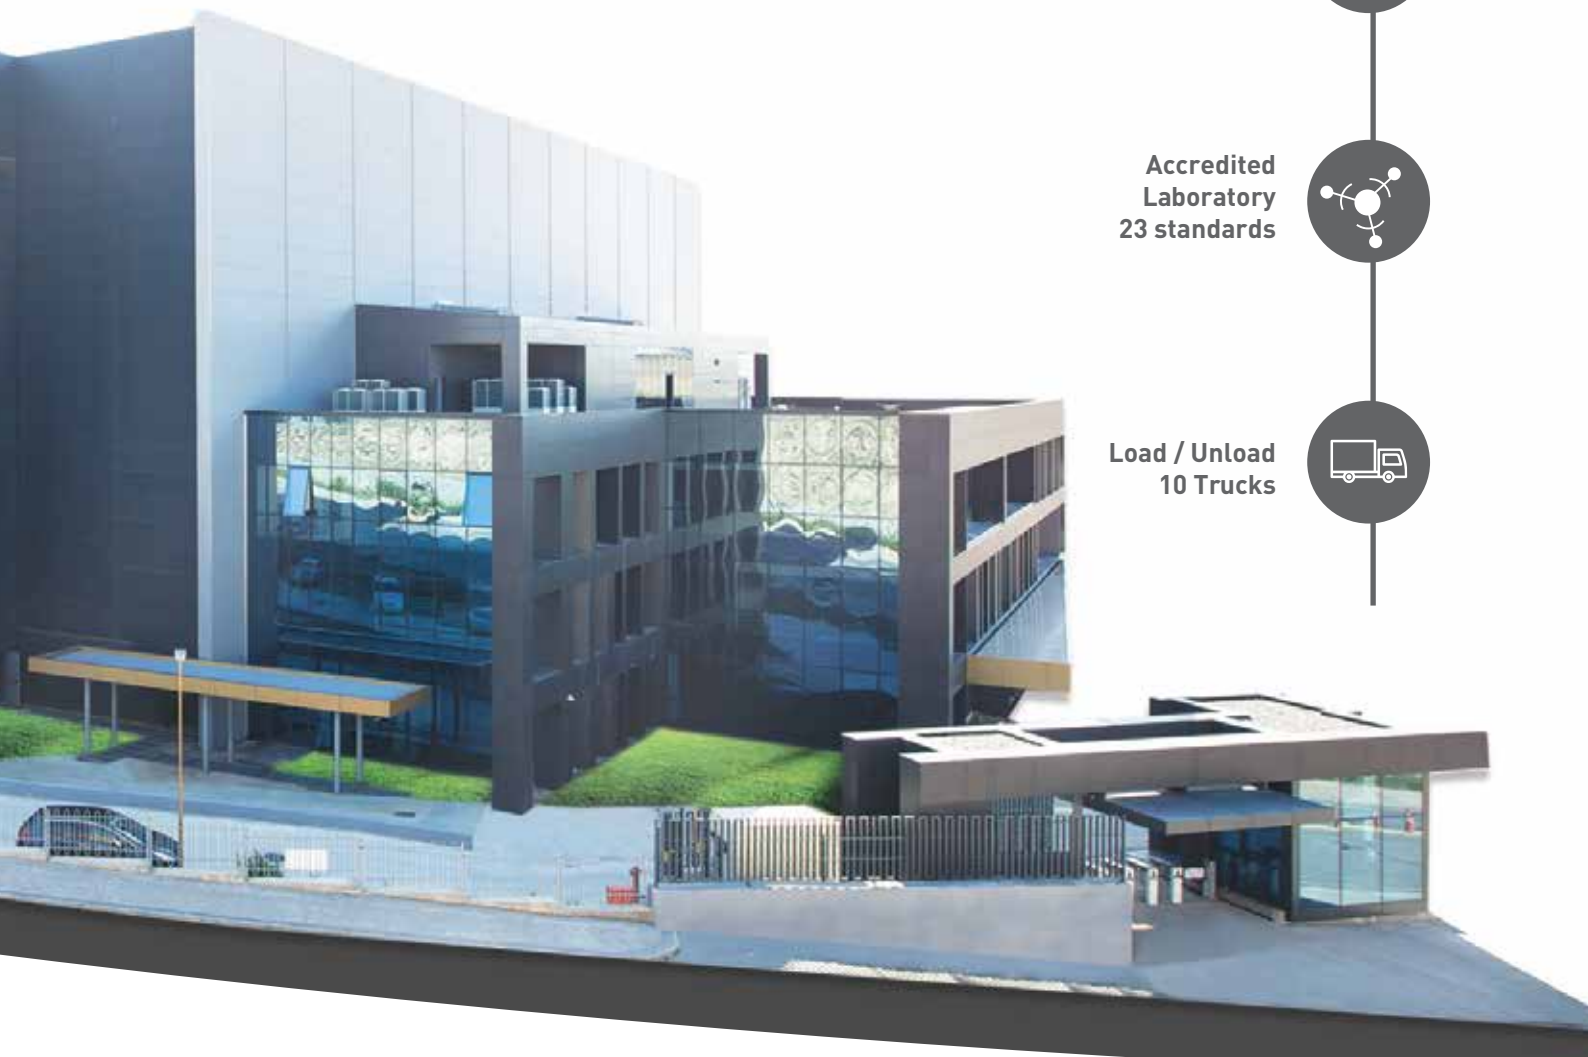

R&D Center
15 Engineers




**Accredited
Laboratory**
23 standards



Load / Unload
10 Trucks



WE
DESIGN
LUMINAIRES

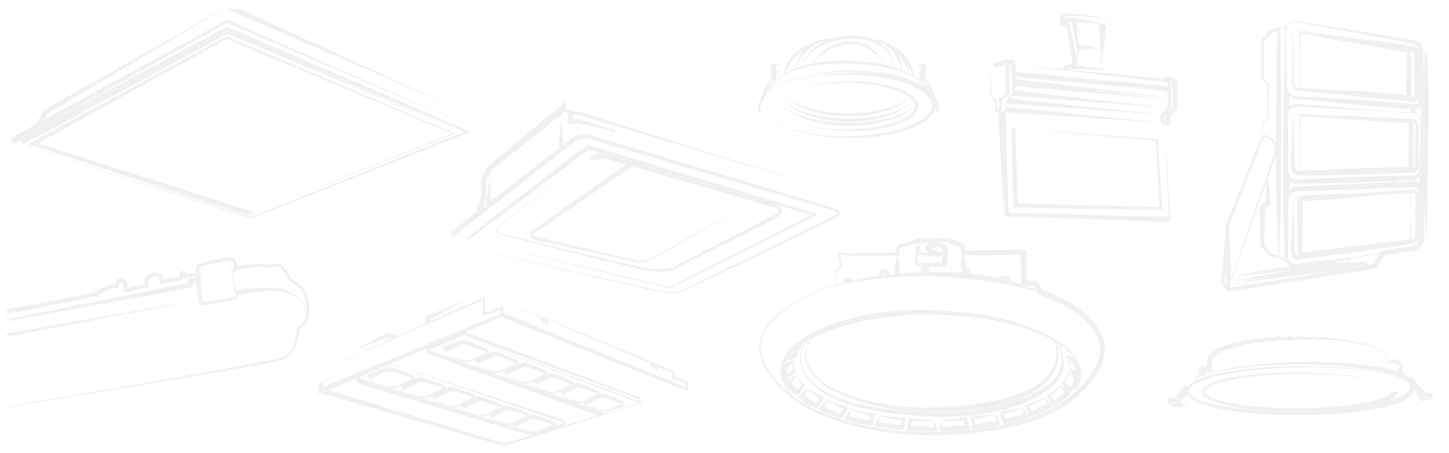

MECHANICAL
DESIGN




OPTICAL
DESIGN



THERMAL
DESIGN



ELECTRICAL
DESIGN

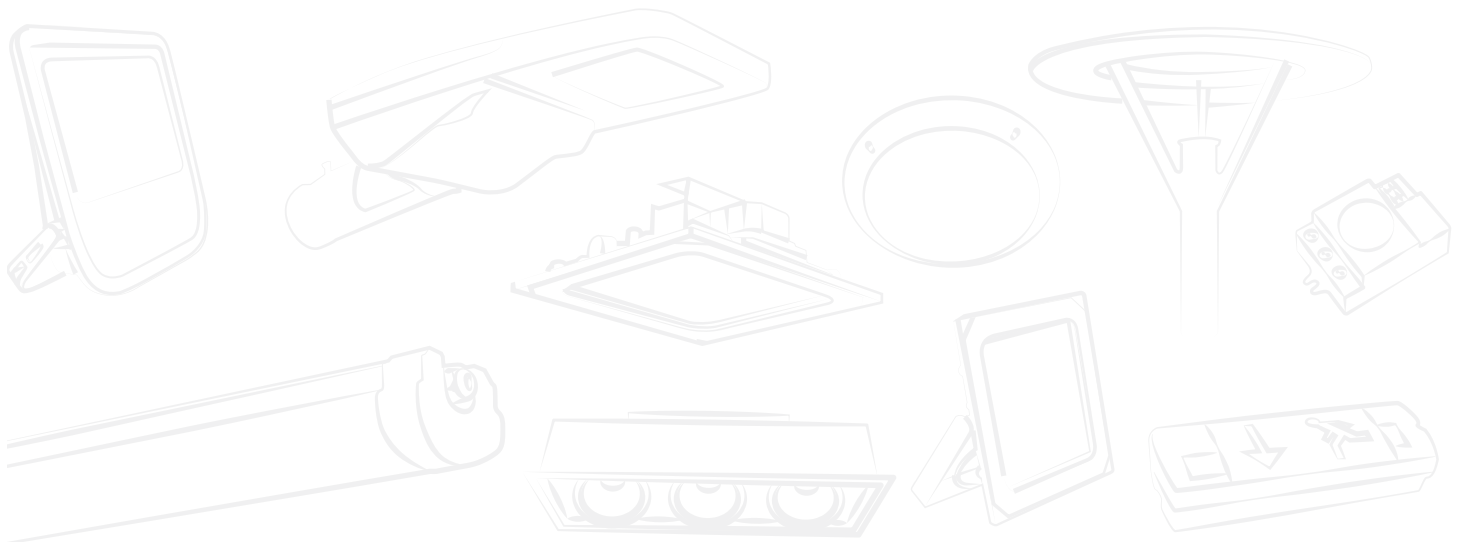


08 Recessed Mounted Backlight Office Luminaires



09 Surface Mounted Backlight Office Luminaires



12 Recessed and Surface Mounted Office Luminaires

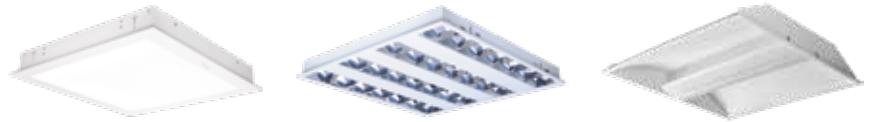

13 Sterile Environment and Hospital Luminaires



14 Recessed Mounted Office Luminaires



15 Linear Luminaires



17 Downlight Luminaires




21 Ceiling Luminaires



23 Sensors



24 Super Market Luminaires

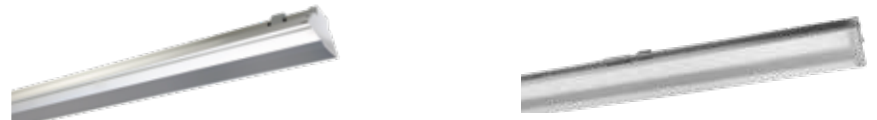

25 Batten Luminaires



26 GRP Waterproof Luminaires



29 Aluminium Waterproof Luminaires



30 PC Waterproof Luminaires



34 Emergency Luminaires

37 Canopy Luminaires

38 Highbay Luminaires

43 Ex-Proof Luminaires

46 Floodlights

51 Road and Street Luminaires

54 Solar Street Lighting Luminaires

56 Park and Garden Luminaires

64 Bollards

66 Appliques

68 Garden and Wallwasher Luminaires

70 LED Tube

71 Certificates

Isoled G3T

Up to
126lm/W



Up to
+126lm/W

European Origin
ENEc Driver

LM80-TM21
Reports

PMMA
Diffuser

PF >0,95




Isoled 60x60 Recessed Mounted

111412 | 36 W | 4464lm | 124lm/W | 595x595x61 mm | 580x580 mm | 6pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP 40 DALI Option Emergency unit

UGR Option

3000K 4000K 6500K Plaster Ceiling - Clip-in

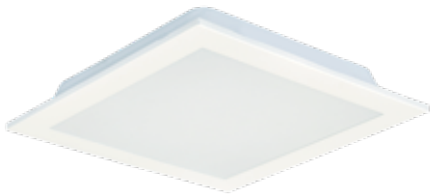


Isoled 30x30 Recessed Mounted

111343 | 12 W | 1416lm | 118lm/W | 295x295x61 mm | 280x280 mm | 5pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP 40 DALI Option Emergency unit

UGR Option

3000K 4000K 6500K Plaster Ceiling - Clip-in

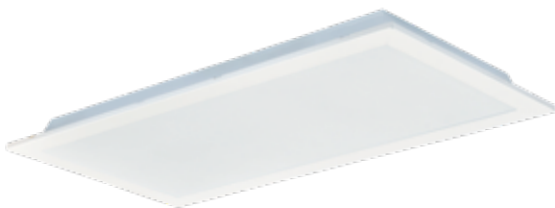

Isoled 30x60 Recessed Mounted

111462 | 17 W | 2143lm | 126lm/W | 295x595x61 mm | 270x570 mm | 5pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP 40 DALI Option Emergency unit

UGR Option

3000K 4000K 6500K Plaster Ceiling - Clip-in



Isoled 30x120 Recessed Mounted

111465 | 36 W | 4464lm | 124lm/W | 295x1195x61 mm | 280x1180 mm | 4pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP 40 DALI Option Emergency unit

UGR Option

3000K 4000K 6500K Plaster Ceiling - Clip-in





Dekoled G3T

Up to ✨
126lm/W ✨

Up to +126lm/W

European Origin
ENEc Driver

LM80-TM21
Reports

PMMA
Diffuser

PF >0,95



Dekoled 60x60 Surface Mounted

111440 | 36 W | 4464lm | 124lm/W | 600x600x61 mm | 6pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP40 DALI Option Emergency unit

UGR Option

● 3000K ● 4000K ● 6500K

TS E EAC CE 5 YEAR WARRANTY



Dekoled 30x30 Surface Mounted

111358 | 12 W | 1416lm | 118lm/W | 300x300x61 mm | 5pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP40 DALI Option Emergency unit

UGR Option

● 3000K ● 4000K ● 6500K

TS E EAC CE 5 YEAR WARRANTY



Dekoled 30x60 Surface Mounted

111456 | 17 W | 2142lm | 126lm/W | 300x600x61 mm | 5pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP40 DALI Option Emergency unit

UGR Option

● 3000K ● 4000K ● 6500K

TS E EAC CE 5 YEAR WARRANTY



Dekoled 30x120 Surface Mounted

111459 | 36 W | 4464lm | 124lm/W | 300x1200x61 mm | 4pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP40 DALI Option Emergency unit

UGR Option

● 3000K ● 4000K ● 6500K

TS E EAC CE 5 YEAR WARRANTY

Isoled G3L



100lm/W

ENEC Certified Driver

LM80-TM21 Reports

LED Module with PMMA Lens



Isoled 60x60 Recessed Mounted


111475 | 36 | 3708lm | 103lm/W | 595x595x40 | 500x500 | 6pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP 40 DALI Option Emergency unit

UGR Option

3000K 4000K 6500K Plaster Ceiling - Clip-in

ENEC CE

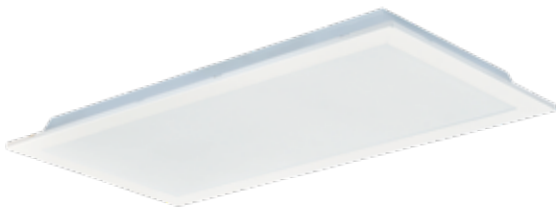

Isoled 30x60 Recessed Mounted


111822 | 17 | 1700lm | 100lm/W | 295x595x40 | 280x580 | 6pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP 40 DALI Option Emergency unit

UGR Option

3000K 4000K 6500K Plaster Ceiling - Clip-in

ENEC CE

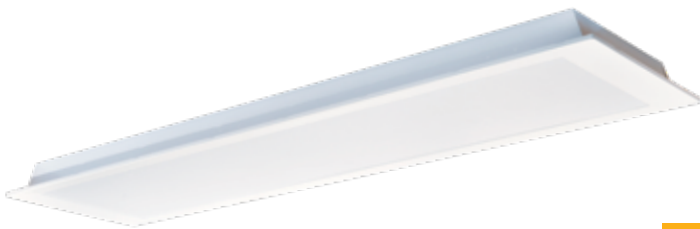

Isoled 30x120 Recessed Mounted

113009 | 36 | 3708lm | 103lm/W | 295x1115x40 | 1180x280 | 4pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP 40 DALI Option Emergency unit

UGR Option

3000K 4000K 6500K Plaster Ceiling - Clip-in

ENEC CE



Isoled 60x120 Recessed Mounted

113247 | 72 | 7416 | 103lm/W | 1195x595x45 | 1180x580 | 1pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP 40 DALI Option Emergency unit

UGR Option

3000K 4000K 6500K Plaster Ceiling - Clip-in

ENEC CE

Dekoled G3L



100lm/W

ENEC Certified Driver

LM80-TM21 Reports

LED Module with PMMA Lens



Dekoled 60x60 Surface Mounted

111500 | 36 W | 3708lm | 103lm/W | 600x600x61 mm | 6pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP 40 DALI Option Emergency unit

UGR Option

3000K 4000K 6500K



Dekoled 30x60 Surface Mounted

111840 | 17 W | 1700lm | 100lm/W | 300x600x61 mm | 5pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP 40 DALI Option Emergency unit

UGR Option

3000K 4000K 6500K



Dekoled 30x120 Surface Mounted

113042 | 36 W | 3708lm | 103lm/W | 300x1200x61 mm | 4pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP 40 DALI Option Emergency unit

UGR Option

3000K 4000K 6500K



Dekoled 60x120 Surface Mounted

113354 | 36 W | 3708lm | 103lm/W | 1200x600x61 mm | 1pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP 40 DALI Option Emergency unit

UGR Option

3000K 4000K 6500K



TS E EAC CE

Energy Efficient, +130lm/W

- Daylight and Motion Sensor Option
- +130lm/W Efficacy
- Surface Mounted Option

Efficca Recessed Mounted / Surface Mounted

108988 | 35 W | 4550lm | 130lm/W | 595x595x82 mm | 575x575 mm | 1pcs

Metal OPAL Diffuser LM80 TM21 ENEC Driver IP 40 DALI Option Emergency unit

3000K 4000K 6500K Plaster Ceiling - Clip-in **UGR Option**



TS E EAC CE 5 YEAR WARRANTY

Energy Efficient, Up to 145lm/W

- Anti-Glare Design, UGR<19
- CRI90 Option
- Surface Mounted, Clip-in Option

Fertis Recessed Mounted / Surface Mounted

115460 | 35 W | 5075lm | 145lm/W | 595x595x33 mm | 570x570 mm | 10pcs

Metal OPAL Diffuser ENEC Driver IP 40 DALI Option Emergency unit

Visual Comfort! UGR<19

- Anti-Glare Design, UGR<19
- +100lm/W Efficacy
- Aluminium Reflector

Retto Recessed Mounted / Surface Mounted

110748 | 36 W | 3600lm | 100lm/W | 595x595x40 mm | 575x575 mm | 6pcs

Metal OPAL Diffuser Aluminium Reflector LM80 TM21 ENEC Driver IP 40 DALI Option Emergency unit

Plaster Ceiling - Clip-in **cm** Dimension Option: 30x120 - 30x150
3000K 4000K 6500K

Indirect Light, UGR<16

- Direct and Indirect Light
- Anti-Glare Design
- Aesthetic Design

Divaled Indirect

Recessed Mounted / Surface Mounted

108408 | 42 W | 2920lm | 70lm/W | 595x595x75 mm | 580x580 mm | 4pcs

Metal OPAL Diffuser Indirect Light LM80 TM21 ENEC Driver IP 20 DALI Option Emergency unit

3000K 4000K 6500K Clip-in

- Quick and easy installation



TS E EAC CE



Sterile UGR<19 Recessed Mounted

110608 | 36 W | 3240lm | 600x600x50 mm | 2 pcs

Metal | Tempered Glass | LM80 TM21 | ENEC Driver | IP 65 | DALI Option | Emergency unit

● 3000K ● 4000K ● 6500K

CE



Sterile IP65 Recessed Mounted

109777 | 36 W | 3240lm | 599x595x80 mm | 575x575 mm | 2 pcs


Metal | Tempered Glass | LM80 TM21 | ENEC Driver | IP 65 | DALI Option | Emergency unit

● 3000K ● 4000K ● 6500K

Plaster Ceiling

Dimension Options: 30x30 - 30x60 - 30x120

CE

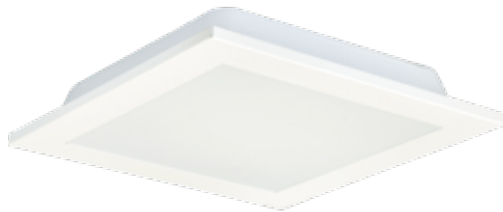

Cleared IP65 Recessed Mounted

111518 | 12 W | 1416lm | 118lm/W | 295x295x61 mm | 280x280 mm | 5 pcs
 111542 | 36 W | 4464lm | 124lm/W | 595x595x61 mm | 580x580 mm | 6 pcs

Metal | OPAL Diffuser | LM80 TM21 | ENEC Driver | IP 65 | DALI Option | Emergency unit

● 3000K ● 4000K ● 6500K

TSE EAC CE



Sterile IP65

109906 | 36 W | 2880lm | 600x600x75 mm | 2 pcs

Metal | Tempered Glass | LM80 TM21 | ENEC Driver | IP 65 | DALI Option | Emergency unit

● 3000K ● 4000K ● 6500K Surface Mounted Option

Dimension Options: 30x30 - 30x60 - 30x120

CE



Negatoscope Surface Mounted



106101 | 42 W | 4620lm | 600x600x50 mm | 1 pcs
 106103 | 84 W | 9240lm | 1200x600x50 mm | 1 pcs

Metal | OPAL Diffuser | LM80 TM21 | ENEC Driver | IP 20 | Emergency unit

● 4000K ● 6500K

CE

Maximum Visual Comfort

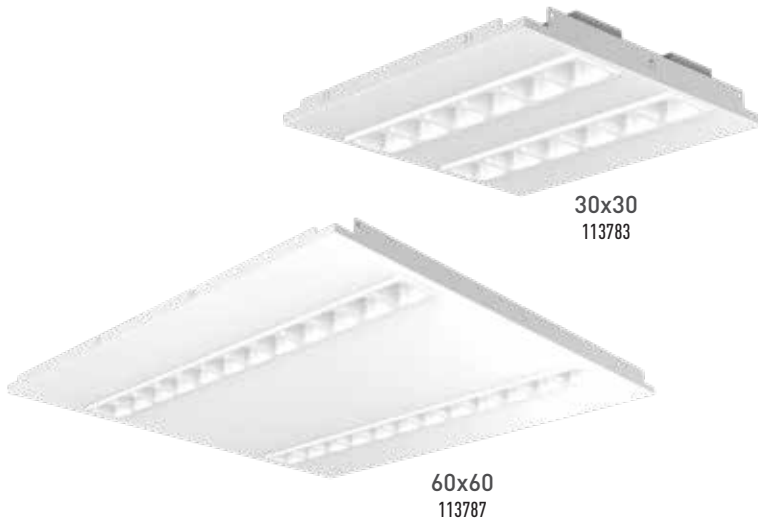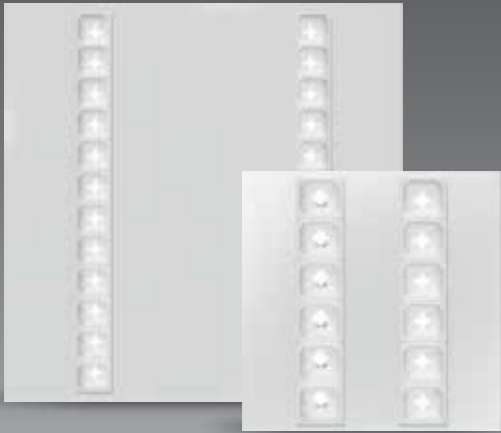



Nora G2 UGR<19

113783	12 W	1500lm	125lm/W	295x295x35 mm	270x270	4 pcs
113787	36 W	4500lm	125lm/W	595x595x35 mm	570x570	5 pcs

- Metal
- OPAL Diffuser
- LM80 TM21
- ENEC Driver
- IP 40
- DALI Option
- Emergency unit

● 3000K ● 4000K ● 6500K Plaster Ceiling - Clip-in

UGR (Unified Glare Rating)

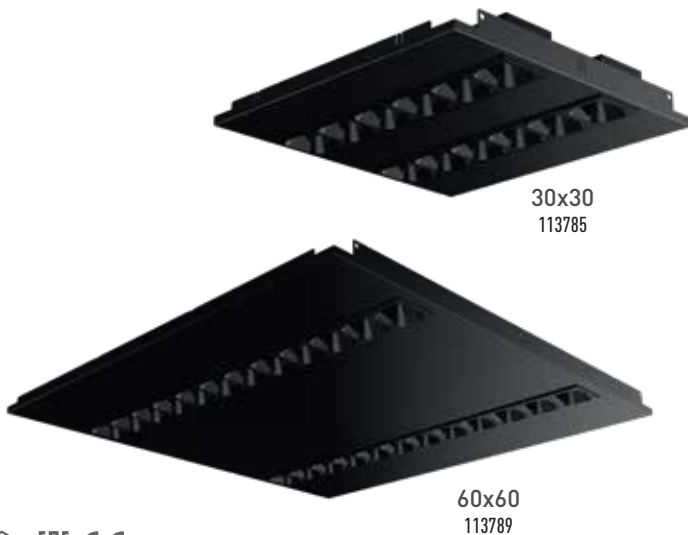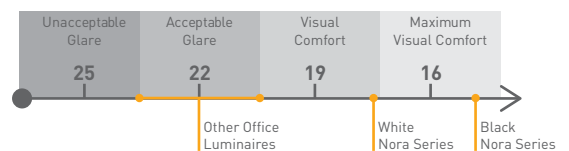


Nora G2 UGR<16

113785	12 W	1260lm	105lm/W	295x295x35 mm	270x270	4 pcs
113789	36 W	4068lm	113lm/W	595x595x35 mm	570x570	5 pcs

- Metal
- OPAL Diffuser
- LM80 TM21
- ENEC Driver
- IP 40
- DALI Option
- Emergency unit

● 3000K ● 4000K ● 6500K Plaster Ceiling - Clip-in



UGR (Unified Glare Rating)

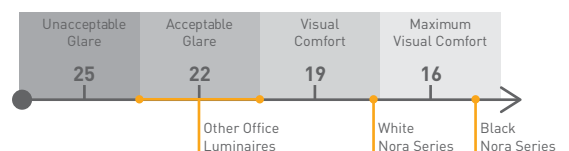

Maximum Visual Comfort





Anti-Glare
Optic Design

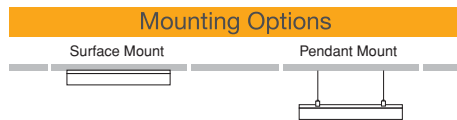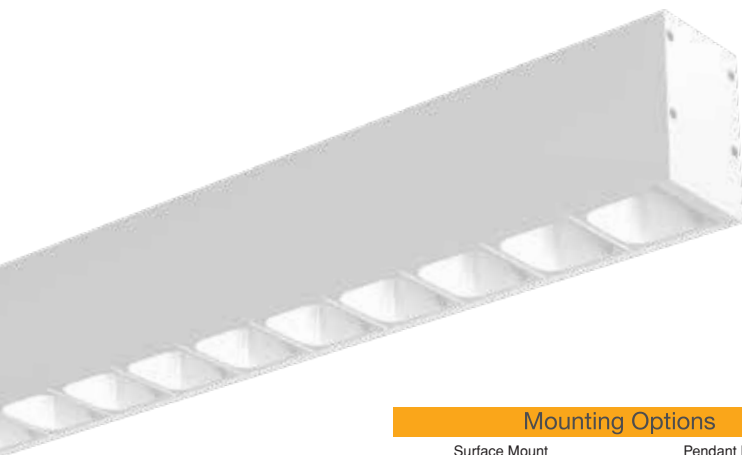

Nora Linear UGR<19

110674	14 W	1330lm	580x58x85 mm	1 pcs
110676	20 W	1900lm	865x58x85 mm	1 pcs
110678	28 W	2660lm	1150x58x85 mm	1 pcs
110681	42 W	3990lm	1435x58x85 mm	1 pcs


Aluminium IP40 DALI Option Emergency unit OPAL Diffuser
 ENEC Driver LM80 TM21 3000K 4000K 6500K

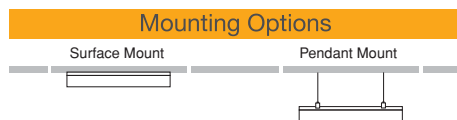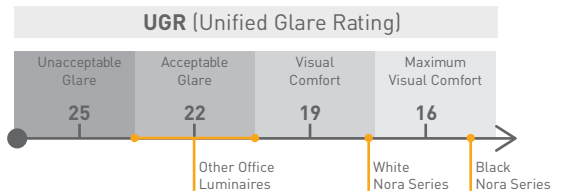

Nora Linear UGR<16

110673	14 W	728lm	580x58x85 mm	1 pcs
110675	20 W	1040lm	865x58x85 mm	1 pcs
110677	28 W	1456lm	1150x58x85 mm	1 pcs
110680	42 W	2184lm	1435x58x85 mm	1 pcs

Aluminium IP40 DALI Option Emergency unit OPAL Diffuser
 ENEC Driver LM80 TM21 3000K 4000K 6500K

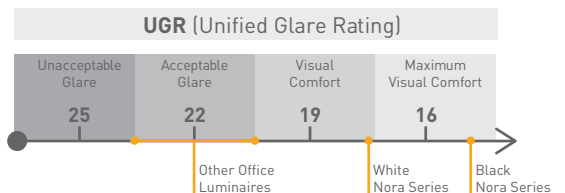





Continuous Linear Connection

Continuous Linear Connection with External Connection apparatus without opening the product.

Eterna G2 Surface Mounted (57mm)

114415	14 W	1512lm	108lm/W	620x57x85 mm	1pcs
114416	20 W	2200lm	110lm/W	900x57x85 mm	1pcs
114417	28 W	3024lm	108lm/W	1220x57x85 mm	1pcs
114418	42 W	4494lm	107lm/W	1500x57x85 mm	1pcs

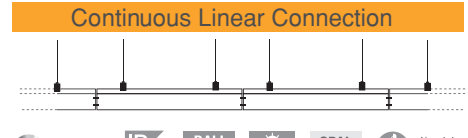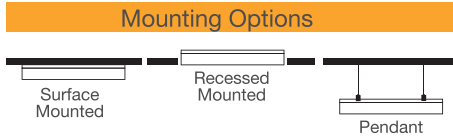

- Aluminium
- IP 40
- DALI Option
- Emergency unit
- OPAL Diffuser
- Aluminium Reflector
- ENEC Driver
- LM80 TM21
- 3000K
- 4000K
- 6500K



Linear Indirect Light



Eterna Indirect Surface Mounted (47mm)

206015	42 W	2600-1600lm	100lm/W	900x47x68 mm	1pcs
206016	52 W	3400-1800lm	100lm/W	1200x47x68 mm	1pcs
206017	68 W	4400-2400lm	100lm/W	1470x47x68 mm	1pcs
206018	100 W	6000-4000lm	100lm/W	2000x47x68 mm	1pcs


- Aluminium
- IP 40
- DALI Option
- Emergency unit
- OPAL Diffuser
- ENEC Driver
- LM80 TM21
- 3000K
- 4000K
- 6500K



Eterna G2 Recessed Mounted (77mm)

114419	14 W	1512lm	108lm/W	625x77x85 mm	1pcs
114420	20 W	2200lm	110lm/W	895x77x85 mm	1pcs
114421	28 W	3024lm	108lm/W	1225x77x85 mm	1pcs
114422	42 W	4494lm	107lm/W	1505x77x85 mm	1pcs


- Aluminium
- IP 40
- DALI Option
- Emergency unit
- OPAL Diffuser
- Aluminium Reflector
- ENEC Driver
- LM80 TM21
- 3000K
- 4000K
- 6500K

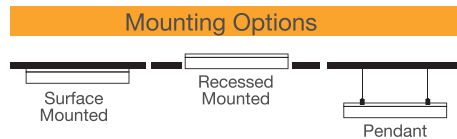

Trenta G2

113031	36 W	3060lm	85lm/W	1020x33x60 mm	12pcs
--------	------	--------	--------	---------------	-------

- Aluminium
- IP 40
- DALI Option
- Emergency unit
- OPAL Diffuser
- Aluminium Reflector
- ENEC Driver
- LM80 TM21
- 3000K
- 4000K
- 6500K





Tira Round

Tira Black

Tira IP54

Tira G2

Rina

There is always a Tira suitable to your place!

- +50.000 hours lifetime
- DALI Dim Options
- Black and White Frame

3 Different Body Options



Tira G2 4"

114130 | 12 W | 1200lm | 100lm/W | 145x30 mm | 120 min | 30pcs

- Aluminium
- OPAL Diffuser
- LM80 TM21
- ENEC Driver
- IP 40
- DALI Option
- Emergency unit
- 3000K ● 4000K ● 6500K



Tira G2 6"

114134 | 24 W | 2400lm | 100lm/W | 180x30 mm | 152 min | 20pcs

- Aluminium
- OPAL Diffuser
- LM80 TM21
- ENEC Driver
- IP 40
- DALI Option
- Emergency unit
- 3000K ● 4000K ● 6500K



Rina 4" Surface Mounted

110599 | 12 W | 1200lm | 100lm/W | 130x100 mm | 20pcs

- Aluminium
- OPAL Diffuser
- LM80 TM21
- ENEC Driver
- IP 40
- DALI Option
- Emergency unit
- 3000K ● 4000K ● 6500K



Rina 6" Surface Mounted

110600 | 24 W | 2472lm | 103lm/W | 175x100 mm | 16pcs

- Aluminium
- OPAL Diffuser
- LM80 TM21
- ENEC Driver
- IP 40
- DALI Option
- Emergency unit
- 3000K ● 4000K ● 6500K





Black frame option

Tira Round

106928	5 W	550lm	110lm/W	148x56,5 mm	132	20pcs
106934	7 W	770lm	110lm/W	148x56,5 mm	132	20pcs
106937	10 W	1100lm	110lm/W	148x56,5 mm	132	20pcs
106943	10 W	1100lm	110lm/W	197x56,5 mm	185	15pcs
106950	15 W	1545lm	103lm/W	197x56,5 mm	185	15pcs
106961	20 W	2000lm	100lm/W	197x56,5 mm	185	15pcs
106969	20 W	2000lm	100lm/W	240x56,5 mm	220	10pcs
106977	25 W	2500lm	100lm/W	240x56,5 mm	220	10pcs
106985	35 W	3325lm	95lm/W	240x56,5 mm	220	10pcs

Aluminium
 OPAL Diffuser
 LM80 TM21
 ENEC Driver
 IP 40
 DALI Option
 Emergency unit

3000K
 4000K
 6500K



Black frame option

Tira Square

106991	5 W	550lm	110lm/W	148x148x56,5 mm	132	20pcs
106994	7 W	770lm	110lm/W	148x148x56,5 mm	132	20pcs
106997	10 W	1100lm	110lm/W	148x148x56,5 mm	132	20pcs
107003	10 W	1100lm	110lm/W	197x197x56,5 mm	185	15pcs
107006	15 W	1545lm	103lm/W	197x197x56,5 mm	185	15pcs
107012	20 W	2000lm	100lm/W	197x197x56,5 mm	185	15pcs
107018	20 W	2000lm	100lm/W	233x233x56,5 mm	220	10pcs
107021	25 W	2500lm	100lm/W	233x233x56,5 mm	220	10pcs
107025	35 W	3325lm	95lm/W	233x233x56,5 mm	220	10pcs

Aluminium
 OPAL Diffuser
 LM80 TM21
 ENEC Driver
 IP 40
 DALI Option
 Emergency unit

3000K
 4000K
 6500K



Black frame option

Tira IP54

107069	7 W	665lm	95lm/W	148x56,5 mm	132	20pcs
107072	10 W	950lm	95lm/W	148x56,5 mm	132	20pcs
107075	15 W	1545lm	103lm/W	197x56,5 mm	185	15pcs
107078	20 W	2000lm	100lm/W	197x56,5 mm	185	15pcs
107081	25 W	2500lm	100lm/W	233x56,5 mm	220	10pcs
107084	35 W	3325lm	95lm/W	233x56,5 mm	220	10pcs

Aluminium
 OPAL Diffuser
 LM80 TM21
 ENEC Driver
 IP 54
 DALI Option
 Emergency unit

3000K
 4000K
 6500K



Dore



Slim Design



Up to 134lm/W High Efficiency



ENEC Certified Driver



+50.000h Lifetime



Dore 4"

110864 | 7 W | 791lm | 113 lm/W | 120x45 mm | 105 ° | 30pcs



Dore 6"

110865 | 10 W | 1120lm | 112 lm/W | 170x45 mm | 155 ° | 30pcs
110866 | 13 W | 1547lm | 119 lm/W | 170x45 mm | 155 ° | 30pcs



Dore 8"

110867 | 18 W | 2412lm | 130 lm/W | 225x45 mm | 205 ° | 20pcs
110868 | 22 W | 2948lm | 134 lm/W | 225x45 mm | 205 ° | 20pcs



Dore Surface Mounted

111752 | 18 W | 2412lm | 134 lm/W | 228x55 mm | 10pcs
111755 | 22 W | 2420lm | 110 lm/W | 228x55 mm | 10pcs



Sirma



 Slim Design

 Backlight Light Comfort

 Internal Driver

 Emergency Unit Option



Sirma 6W/9W

110331	6 W	534lm	89 lm/W	120x45 mm	105	20pcs
110334	9 W	792lm	88 lm/W	120x45 mm	105	20pcs

- ABS
- OPAL Diffuser
- LM80 TM21
- IP 40
- Emergency unit
- 3000K
- 4000K
- 6500K



Sirma 12W/15W

110341	12 W	1128lm	94 lm/W	170x45 mm	155	15pcs
110344	15 W	1365lm	91 lm/W	170x45 mm	155	15pcs

- ABS
- OPAL Diffuser
- LM80 TM21
- IP 40
- Emergency unit
- 3000K
- 4000K
- 6500K



Sirma 18W

110350	18 W	1872lm	104 lm/W	225x45 mm	205	10pcs
--------	------	--------	----------	-----------	-----	-------

- ABS
- OPAL Diffuser
- LM80 TM21
- IP 40
- Emergency unit
- 3000K
- 4000K
- 6500K



Sirma Surface Mounted

111749	18 W	1782lm	99 lm/W	228x55 mm		10pcs
--------	------	--------	---------	-----------	--	-------

- ABS
- OPAL Diffuser
- LM80 TM21
- IP 40
- Emergency unit
- 3000K
- 4000K
- 6500K

Pio Surface Mounted



206677	12 W	840lm	6500K	Ø258x57	10pcs
206913	18 W	1260lm	6500K	Ø335x60	10pcs
208414	28 W	1960lm	6500K	Ø387x58	10pcs

Metal OPAL Diffuser IP 40

● 6500K

CE

Punto Surface Mounted



111306	24 W	720lm	6500K	350x74x350	10pcs
111309	24 W	720lm	6500K	350x74	10pcs

Metal OPAL Diffuser IP 40 SENSOR Option

● 6500K

CE

Picto Surface Mounted



111312	24 W	1920lm	350x74x350	10pcs
111314	24 W	1920lm	350x74	10pcs

Metal OPAL Diffuser IP 40

● 6500K

CE

Sense Surface Mounted



104359	2xE27 Sensor	2xE27	—	300x105	10pcs
110697	2xE27 Emergency Sensor	2xE27	—	300x105	10pcs
110695	2xE27	2xE27	—	300x105	10pcs
110696	LED Sensor	8 W	864lm	300x105	10pcs
104369	Emergency LED Sensor	8 W	740lm	300x105	10pcs

Metal SEMI OPAL Diffuser IP 20

● 4000K ● 6500K

CE

Oval Bulkhead



204487 | E27 | 210x110x92 | 18pcs

Aluminium injection Tempered Glass

IP 54

CE

Havana

**Screwless Design
Easy Installation**



Easy Installation




EMG + Microwave Sensor



IP66 Dust and Waterproof

- WHITE
- GRAY
- BLACK

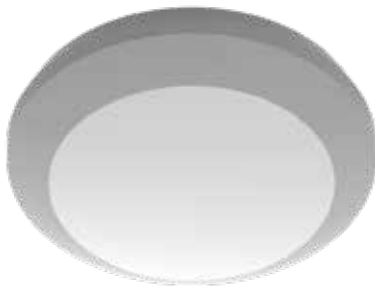

Dust and Waterproof


Havana E27 Lampholder

111193	1XE27	max 20 W	260x87 mm	8pcs
111194	2XE27	max 20 W	260x87 mm	8pcs
111221	1XE27 + Sensor	max 20 W	260x87 mm	8pcs
111223	2XE27 + Sensor	max 20 W	260x87 mm	8pcs

Polymer Injection Body
 OPAL Diffuser
 IP66
● 3000K ● 4000K ● 6500K

ERC CE

- WHITE
- GRAY
- BLACK

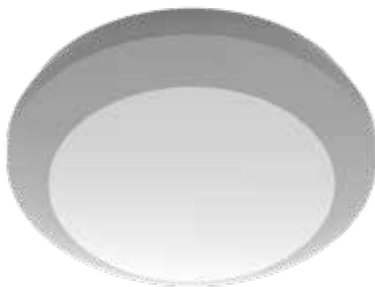

Dust and Waterproof


Havana (LED+ENEC Driver)

111226	LED	15 W	1605lm	260x87 mm	8pcs
111236	LED+Sensor	15 W	1605lm	260x87 mm	8pcs
111245	LED+Emergency	15 W	1605lm	260x87 mm	8pcs
111260	LED+Emergency+Sensor	15 W	1605lm	260x87 mm	8pcs

Polymer Injection Body
 OPAL Diffuser
 LM80 TM21
 ENEC Driver
 Emergency unit
 IP66
● 3000K ● 4000K ● 6500K

ERC CE

- WHITE
- GRAY
- BLACK

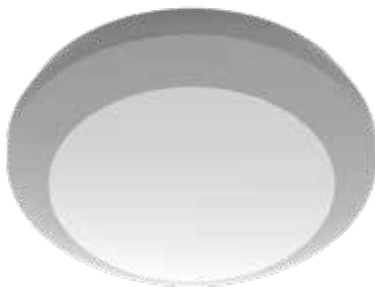

Dust and Waterproof

Havana Integrated Driver

111692	LED	18 W	1530lm	260x87 mm	8pcs
111701	LED + Sensor	18 W	1530lm	260x87 mm	8pcs


Polymer Injection Body
 OPAL Diffuser
 LM80 TM21
 IP66
● 3000K ● 4000K ● 6500K

ERC CE




360° Motion Sensor

314720 | 80x41 mm | 50pcs

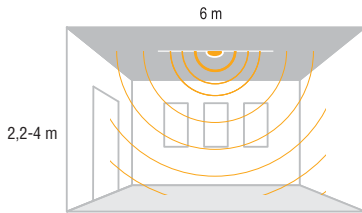


Presence Sensor

314733 | 102,5x58,3 mm | 50pcs

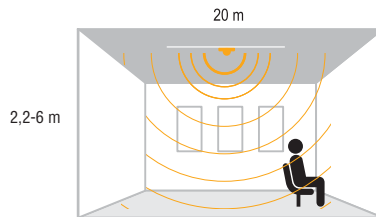


Microwave Sensor

314725 | 54,5x39,5x25 mm | 100pcs

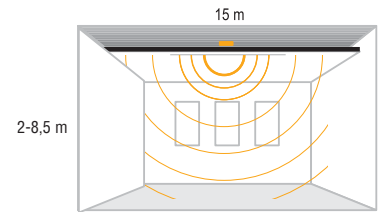

Recessed Mounted Sensor


314726 | 75,7x77 mm | 60 | 50pcs

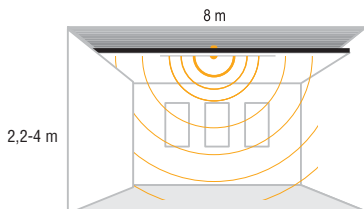

New

Recessed Mounted Microwave Sensor


326838 | 66 | 50pcs



New


Surface Mounted Microwave Sensor

326839 | 66 | 50pcs

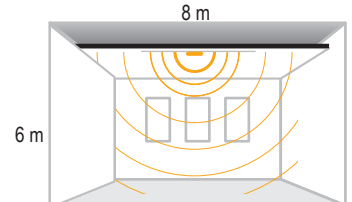


180° Motion Sensor

314717 | 110x66x135 mm | 50pcs

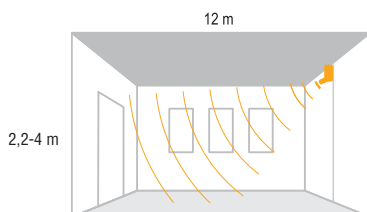

Four Way Motion Sensor

314729 | 58,8x72,3 mm | 50pcs

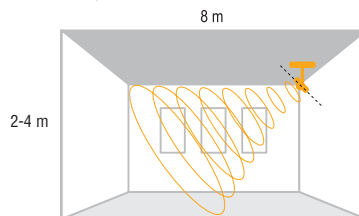

IP65 Sensor Box

314735 | 134x66 mm | 50pcs



Protects indoor (IP65) sensors from rain and dust.



Multiline

Monoline



CE

120lm/W Efficacy!

- Energy Saving up to %60
- Easy Linear Connection
- x2.5 Times Longer Life to T5 Fluorescent

Monoline

109563	28 W	120lm/W	1133x169x72 mm	6pcs
109565	35 W	120lm/W	1415x169x72 mm	4pcs

- Metal
 - OPAL Diffuser
 - Aluminium Reflector
 - LM80 TM21
 - ENEC Driver
 - IP 40
 - DALI Option
 - Emergency unit
- 3000K ● 4000K ● 6500K

114lm/W Efficacy!

- Directs the Light to the Desired Spot
- 7 Step angle light level, from 15° to 115°
- Provides Continuous Linear Light

Multiline

105381	35 W	4020lm	114lm/W	1200x140x58 mm	4pcs
105383	35 W	4020lm	114lm/W	1500x140x58 mm	4pcs
105385	50 W	5720lm	114lm/W	1500x140x58 mm	4pcs

- Metal
 - OPAL Diffuser
 - Aluminium Reflector
 - Clear & Frosted Diffuser
 - LM80 TM21
 - ENEC Driver
- 3000K ● 4000K ● 6500K
- IP 40
 - DALI Option
 - Emergency unit

CE



IP65 Linea
Polymer Injection Body

113655 | 36 W | 3600lm | 100lm/W | 1133x75x25 mm | 20pcs

Polymer Inj. Body IP 65 ● 6500K

CE




IP40 Linea
Polymer Injection Body

113653 | 36 W | 3060lm | 90lm/W | 1115x75x25 mm | 20pcs

Polymer Inj. Body IP 40 ● 6500K

CE

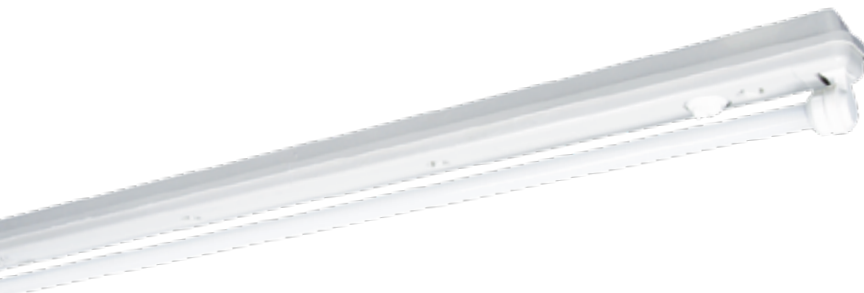

IP65 LED Tube Batten
Polyester Body

103200 | 1xG13 | 1270x130x68 mm | 6pcs
103261 | 1xG13 | 1560x130x68 mm | 6pcs

GRP G13 IP 65

Options X2 LED Tube

CE



IP54 LED Tube Batten
Metal Body

111276 | 1xG13 | 640x55x90 mm | 12pcs
111618 | 1xG13 | 1260x55x90 mm | 12pcs
111620 | 1xG13 | 1560x55x90 mm | 12pcs

Metal G13 IP 54

Options X2 LED Tube

CE



IP20 LED Tube Batten
Metal Body

111621 | 1xG13 | 1200x40x54 mm | 1pcs
111279 | 1xG13 | 600x40x54 mm | 1pcs

Metal G13 IP 20

Options X2 LED Tube

CE



Wide Product Range


- LED / LED Tube / TLD
- Exproof / Frozen / Carpark
- Anti-Corrosion GRP Body
- 60cm / 120cm / 150cm
- Opal / Semi-Opal / Clear Diffuser
- Stainless Steel / Polymer / Anti-vandal latch
- DALI / Casambi / Emergency Options



Largo LED



Largo Max

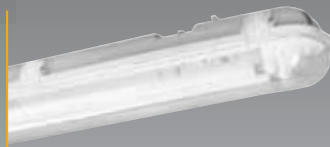

Largo LED Tube



Largo LED Tube



Largo LED

109150	20 W	2400 lm	120lm/W	663x85x85 mm	6pcs
109151	36 W	4500 lm	125lm/W	1275x85x85 mm	6pcs
109153	42 W	5040 lm	120lm/W	1573x85x85 mm	6pcs
111114	50 W	6750 lm	135lm/W	1275x125x85 mm	6pcs
111113	75 W	9600 lm	128lm/W	1275x125x85 mm	6pcs

GRP
 OPAL Diffuser
 CLEAR Diffuser
 SEMI OPAL Diffuser
 LM80 TM21
 ENEC Driver
 IP 65
 DALI Option
 1-10V
 Emergency unit
 CASAMBI
 ● 3000K ● 4000K ● 6500K
 Corridor Function

TSE
 EAC
 CE
 5 Year Warranty



Largo LED Tube (1xG13)

102669	1xG13	663x85x85 mm	6pcs
102713	1xG13	1275x85x85 mm	6pcs
102867	1xG13	1573x85x85 mm	6pcs

GRP
 CLEAR Diffuser
 IP 65
 G13
 Emergency unit

EAC CE



Largo LED Tube (2xG13)

102687	2xG13	663x85x125 mm	6pcs
102744	2xG13	1273x85x125 mm	6pcs
102878	2xG13	1573x85x125 mm	4pcs

GRP
 CLEAR Diffuser
 IP 65
 G13
 Emergency unit

EAC CE



75W
128lm/W

LARGO Max



ENEC CE

LARGO Max

111114	50 W	6750 lm	135 lm/W	1275x125x85 mm	6pcs
111113	75 W	9600 lm	128 lm/W	1275x125x85 mm	6pcs

- GRP
- OPAL Diffuser
- CLEAR Diffuser
- SEMI OPAL Diffuser
- LM80 TM21
- ENEC Driver

IP65 Corridor Function

- 3000K
- 4000K
- 6500K



for Carparks

CE

LARGO Carpark

113489	36 W	3960lm	1273x85x85 mm	6pcs
--------	------	--------	---------------	------

- GRP
- OPAL Diffuser
- CLEAR Diffuser
- SEMI OPAL Diffuser
- LM80 TM21
- ENEC Driver

IP65 Corridor Function

- 3000K
- 4000K
- 6500K

Carpark Function



24V DC



CE

LARGO 24V DC

110119	21 W	2100lm	663x85x85 mm	6pcs
110114	42 W	4200lm	1273x85x85 mm	6pcs

- GRP
- OPAL Diffuser
- CLEAR Diffuser
- SEMI OPAL Diffuser
- LM80 TM21
- IP65

- 3000K
- 4000K
- 6500K



II 3G Ex nR IIC T6 Gc
II 3D Ex tc IIC T 80° Dc

Largo LED Ex-Proof Waterproof

108458	25 W	2750 lm	110lm/W	670x85x125 mm	6pcs
108459	45 W	4950 lm	110lm/W	1280x85x125 mm	6pcs

GRP OPAL Diffuser CLEAR Diffuser LM80 TM21 ENEC Driver IP 65

● 3000K ● 4000K ● 6500K



II 3G Ex nR IIC T6 Gc
II 3D Ex tc IIC T 80° Dc

Largo T8 Ex-Proof Waterproof

108297	2x18 W	—	G13 TL-D	670x85x125 mm	6pcs
108298	2x36 W	—	G13 TL-D	1280x85x125 mm	6pcs

GRP OPAL Diffuser CLEAR Diffuser LM80 TM21 ENEC Driver IP 65

● 3000K ● 4000K ● 6500K



CE

Largo Chemical Resistant

105871	21 W	2100lm	100lm/W	663x85x85 mm	6pcs
105884	42 W	4200lm	100lm/W	1273x90x90 mm	6pcs
105894	63 W	6300lm	100lm/W	1573x85x85 mm	6pcs

GRP OPAL Diffuser CLEAR Diffuser SEMI OPAL Diffuser LM80 TM21 ENEC Driver

IP 65

● 3000K ● 4000K ● 6500K



Suitable for Frozen Storage Fields

CE

Largo Frozen

105871	21 W	2100lm	100lm/W	663x85x85 mm	6pcs
105884	42 W	4200lm	100lm/W	1273x90x90 mm	6pcs
105894	63 W	6300lm	100lm/W	1573x85x85 mm	6pcs

GRP OPAL Diffuser CLEAR Diffuser SEMI OPAL Diffuser LM80 TM21 ENEC Driver

IP 65 Corridor Function

● 3000K ● 4000K ● 6500K

5 YEARS WARRANTY



Prota G3



Solida G2



Invoaled G2



Prota G3

115014	18 W	2250lm	125lm/W	555x64x46 mm	12 pcs
115016	23 W	2921lm	127lm/W	805x64x46 mm	12 pcs
115018	33 W	4125lm	125lm/W	1055x64x46 mm	12 pcs
115020	43 W	5504lm	128lm/W	1305x64x46 mm	12 pcs

Aluminium
 OPAL Diffuser
 LM80 TM21
 ENEC Driver
 IP65
 DALI Option
 Emergency unit

● 3000K
 ● 4000K
 ● 6500K



Solida G2

111052	19 W	2261 lm	119 lm/W	625x80x55 mm	6 pcs
111058	30 W	3540 lm	118 lm/W	905x80x55 mm	6 pcs
111059	34 W	3978 lm	117 lm/W	905x80x55 mm	6 pcs
111061	33 W	3927 lm	119 lm/W	1185x80x55 mm	6 pcs
111062	40 W	4720 lm	118 lm/W	1185x80x55 mm	6 pcs
111063	40 W	4800 lm	120 lm/W	1465x80x55 mm	4 pcs
111064	44 W	5192 lm	118 lm/W	1465x80x55 mm	4 pcs

Aluminium
 OPAL Diffuser
 LM80 TM21
 ENEC Driver
 IP65
 DALI Option
 1-10V
 Emergency unit

● 3000K
 ● 4000K
 ● 6500K



Invoaled G2

113454	19 W	2033lm	107lm/W	630x72x59 mm	6pcs
113457	26 W	2782lm	107lm/W	910x72x59 mm	6pcs
113460	34 W	3672lm	108lm/W	1190x72x59 mm	6pcs

Aluminium
 LM80 TM21
 ENEC Driver
 IP66
 DALI Option
 Emergency unit

● 3000K
 ● 4000K
 ● 6500K



Fontana
Waterproof Luminaires



-  Easy Mounting
-  Through Wiring
-  Easy Electrical Installation
-  IP65 Dust and Waterproof
-  IP66 Option



Fontana

111078	19 W	2261 lm	119 lm/W	625x80x78 mm	6pcs
111079	26 W	3120 lm	120 lm/W	905x80x78 mm	6pcs
111082	30 W	3540 lm	118 lm/W	905x80x78 mm	6pcs
111083	34 W	3944 lm	116 lm/W	905x80x78 mm	6pcs
111084	33 W	3993 lm	121 lm/W	1185x80x78 mm	6pcs
111085	40 W	4720 lm	118 lm/W	1185x80x78 mm	6pcs
111086	40 W	4720 lm	118 lm/W	1465x80x78 mm	4pcs
111087	44 W	5236 lm	119 lm/W	1465x80x78 mm	4pcs

PC OPAL Diffuser LM80 TM21 ENEC Driver IP 65 DALI Option 1-10V Emergency unit

● 3000K ● 4000K ● 6500K



Folta

115005	18 W	2142 lm	119 lm/W	555x64x46 mm	12pcs
115007	23 W	2806 lm	122 lm/W	805x64x46 mm	12pcs
115009	33 W	3993 lm	121 lm/W	1055x64x46 mm	12pcs
115011	43 W	5160 lm	120 lm/W	1305x64x46 mm	12pcs

PC OPAL Diffuser LM80 TM21 ENEC Driver IP 65 DALI Option 1-10V Emergency unit

● 3000K ● 4000K ● 6500K



MAX FAMILY in Industrial Lighting



FONTANA MAX



LARGO MAX



INOVALED MAX



Fontana Max

114465	50 W	6500lm	130lm/W	78x80x1180 mm	6pcs
114467	75 W	9450lm	126lm/W	78x80x1180 mm	6pcs

PC OPAL Diffuser LM80 TM21 ENEC Driver IP 65 DALI Option 1-10V Emergency unit

● 3000K ● 4000K ● 6500K

TSE ENEC CE



Largo Max

111114	50 W	6750lm	135lm/W	1273x85x125 mm	6pcs
111113	75 W	9600lm	128lm/W	1273x85x125 mm	6pcs

GRP OPAL Diffuser LM80 TM21 ENEC Driver IP 65 DALI Option 1-10V Emergency unit

● 3000K ● 4000K ● 6500K

TSE ENEC CE



Inovaled Max

113643	100 W	12300lm	123lm/W	910x72x59 mm	6pcs
113644	120 W	15000lm	125lm/W	1190x72x59 mm	6pcs
113645	150 W	18750lm	125lm/W	1470x72x59 mm	6pcs

Aluminium OPAL Diffuser LM80 TM21 ENEC Driver IP 65 DALI Option 1-10V Emergency unit

● 3000K ● 4000K ● 6500K

CE

24V DC



Engine Room



Harsh Environment



Shipyards



Building Site

24V DC



Largo

110119	21 W	1785 lm	85 lm/W	663x85x85 mm	6 pcs
110114	42 W	3570 lm	85 lm/W	1273x85x85 mm	6 pcs

GRP
 OPAL Diffuser
 CLEAR Diffuser
 SEMI OPAL Diffuser
 LM80 TM21
 ENEC Driver
 IP 65

● 3000K
 ● 4000K
 ● 6500K

CE

24V DC



Sterio

110171	50 W	5000 lm	100 lm/W	225x195x59 mm	6 pcs
110506	100 W	10000 lm	100 lm/W	225x365x85 mm	4 pcs

Aluminium injection
 IK10
 IP 66
 Anti Glare Diffuser

● 5700K

CE

110V DC



Building Site



Power Plants



Hydraulic Power Plants

110V DC



Isoled

112976	36 W	3600 lm	100 lm/W	595x595x61 mm	6pcs
112988	36 W	3600 lm	100 lm/W	595x595x61 mm	6pcs

Metal
OPAL Diffuser
LM80 TM21
ENEC Driver
IP 40

CE

110V DC



Largo

112974	36 W	3780 lm	105 lm/W	1273x85x85 mm	6pcs
112975	45 W	4725 lm	105 lm/W	1273x85x85 mm	6pcs
112989	55 W	5775 lm	105 lm/W	1273x85x85 mm	4pcs

GRP
OPAL Diffuser
CLEAR Diffuser
SEMI OPAL Diffuser
LM80 TM21
ENEC Driver
IP 65

3000K
4000K
6500K

CE

110V DC



Ria Med G2

113936	80 W	10000 lm	125lm/W	340x274x66 mm	4pcs
--------	------	----------	---------	---------------	------

Aluminium Injection
Tempered Glass
LM80 TM21
ENEC Driver
IP 66
DALI Option

3000K
4000K
6500K

CE

Emergencies are under the assurance of  **Pelsan**



2x5W



2x10W



IP65 2x10W



Adjustable Head



6 Hours Discharging Time



Double Switch and Test Button



Hangable / Portable Design



Charge, Discharging Indicator



IP40 / IP65 Options



Emergency Luminaires



2x5 / 2x10
Emergency Spot
IP40/IP65



Emergency
Latern



Exiled



Viald



Ausled
IP65 Emergency



IP65 Emergency Spot

110679 | 2x10W | 6 h | 340x480x150 | 1pc

Metal PMMA Lens LM80 TM21 ENEC Driver IP65 Emergency unit
● 3000K ● 4000K ● 6500K

Adjustable Head **Test Switch** **Charge Indicator** **Test Button**

ERC



Metal Emergency Spot

109781 | 2x5W | 6 h | 275x340x80 | 4pcs
109780 | 2x10W | 6 h | 325x340x80 | 4pcs

Metal PMMA Lens LM80 TM21 ENEC Driver IP40 Emergency unit
● 3000K ● 4000K ● 6500K

Adjustable Head **Test Switch** **Charge Indicator** **Test Button**

ERC

2x5W

2x10W

Emergency Spot



2x3W

2x5W

2x10W

203911 | 2x3 | 4 h | 261x89x59 | 10pcs
203913 | 2x5 | 2 h | 280x279x89 | 8pcs
203907 | 2x10 | 6 h | 286x299x89 | 8pcs

Polymer Injection CLEAR Diffuser IP40 Emergency unit

Adjustable Head **Test Switch** **Charge Indicator** **Test Button**

ERC

Ausled IP65 Emergency




115140 | 3 | 3 h | 350x117x76 | 12pcs
108390 | 5 | 3 h | 350x117x76 | 12pcs
110667 | 10 | 3 h | 350x117x76 | 12pcs

Polymer Injection CLEAR Diffuser LM80 TM21 ENEC Driver IP65 Emergency unit
● 3000K ● 4000K ● 6500K

Recessed/Surface Mounted **AC/DC Operating Mode**

ERC



30 LED

40/60 LED

90 LED



Lantern

204619 | 30 LED | 3 | 8 h | 203x55x29 | 40pcs
204620 | 40/60LED | 4/6 | 8 h | 342x55x29 | 24pcs
204623 | 90LED | 9 | 8 h | 482x55x29 | 20pcs

Polymer Injection CLEAR Diffuser IP40 Emergency unit

Replaceable Battery **Test Switch** **Charge Indicator**

ERC




Viald

201165	Pendant	3 W	3 h	280x205x45 mm	10pcs
201013	Surface M.	3 W	3 h	280x205x45 mm	10pcs
201110	Recessed M.	3 W	3 h	310x205x110 mm	10pcs



EAC CE

Single side-Double side Charge Indicator Label Options



4 Different Routing Labels

Rausled Surface Mounted

109387	3 W	3 h	350x217x117 mm	10pcs
--------	-----	-----	----------------	-------



EAC CE



Recessed M.

Exiled Recessed Mounted

200545	Siva Altı / Recessed M.	3 W	3 h	434x150x90 mm	10pcs
--------	-------------------------	-----	-----	---------------	-------



EAC CE

Charge Indicator Single side-Double side Test Switch



Exiled


203891	E5 (single side)	3 W	3 h	360x150x24 mm	10pcs
203885	E5 (double side)	3 W	3 h	360x150x24 mm	10pcs
203890	E54	3 W	3 h	360x150x24 mm	10pcs
203887	E114-115	3 W	3 h	360x150x24 mm	10pcs
203888	E116	3 W	3 h	360x150x24 mm	10pcs
203889	E186	3 W	3 h	360x150x24 mm	10pcs



EAC CE

Single side-Double side Test Switch Charge Indicator Label Options

Label Options

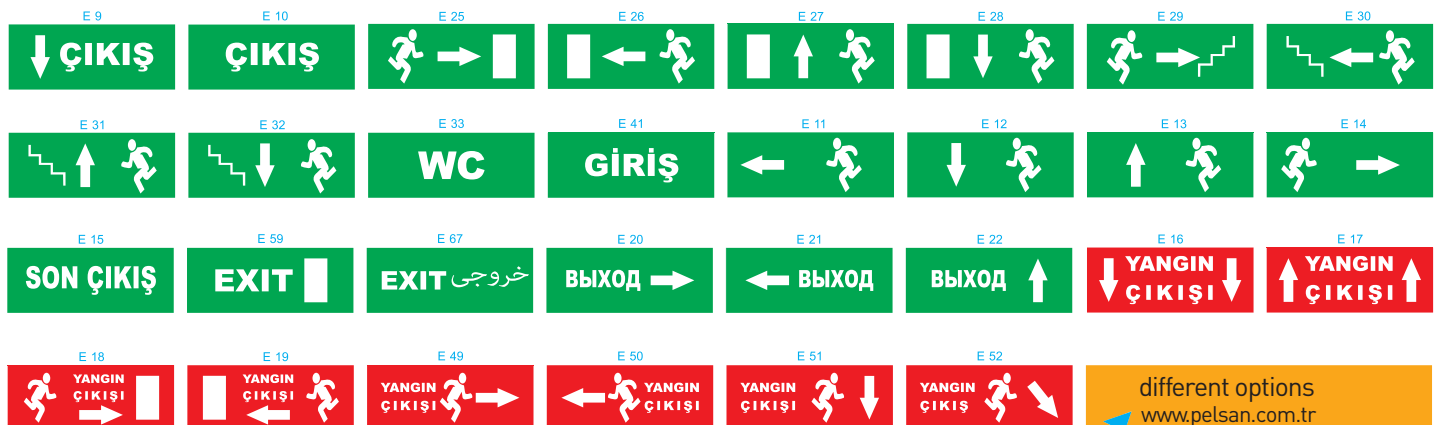

different options
www.pelsan.com.tr



Piroliz Ex-Proof Canopy

111376	50 W	8250lm	165lm/W	395x395x132 mm	1 pcs
111375	75 W	12000lm	160lm/W	395x395x132 mm	1 pcs
111374	100 W	15500lm	155lm/W	395x395x132 mm	1 pcs
111382	125 W	19000lm	152lm/W	395x395x132 mm	1 pcs
111373	150 W	22500lm	150lm/W	395x395x132 mm	1 pcs
111056	200 W	28600lm	143lm/W	395x395x132 mm	1 pcs

- Aluminium injection
- Polymer Reflection
- Tempered Glass
- LM80 TM21
- ENEC Driver
- IP 66

CE ZONE 2 ZONE 22 II 3G Ex nR IIC T5 Gc II 3D Ex tc IIC T95° Dc

High Performance for Gas Station

- Up to 120lm/W Efficacy
- Aluminium Injection Body
- ENEC Certified Driver



Piroliz Canopy

106583	75 W	8625lm	115lm/W	395x385x132 mm	1 pcs
106584	100 W	11000lm	110lm/W	395x385x132 mm	1 pcs
106585	125 W	13125lm	105lm/W	395x385x132 mm	1 pcs

- Aluminium Injection
- PMMA Lens
- Tempered Glass
- LM80 TM21
- ENEC Driver
- IP 65
- DALI Option

3000K 4000K 6500K

CE

80W 140lm/W

- Aluminium Body
- ENEC Certified Driver
- LM80-TM21 Reported LED Chips



Okta Canopy

106627	80 W	11200lm	140lm/W	400x400x140 mm	1 pcs
110173	100 W	11000lm	110lm/W	400x400x140 mm	1 pcs

- Aluminium Injection
- Tempered Glass
- LM80 TM21
- ENEC Driver
- IP 65
- DALI Option

3000K 4000K 6500K

CE

Eco Solution for Gas Station

Lenta Canopy

110507	100 W	10000lm	100lm/W	400x400x88 mm	1 pcs
--------	-------	---------	---------	---------------	-------

- Aluminium Injection
- Tempered Glass
- IP 65

5000K

CE



Cronto IP66



Specifications of IP67 Driver



ENEC Certified



100.000 h Driver Lifetime



10kV Internal SPD



-40°C +55°C



IP67



100-277Vac



Cronto IP66 150-200W

111333	150 W	22350 lm	149 lm/W	555x230x135 mm	1 pcs
111334	200 W	28800 lm	144 lm/W	555x230x135 mm	1 pcs

Aluminium Injection
 Tempered Glass
 LM80 TM21
 ENEC Driver
 IP65
 DALI Option

1-10V Emergency unit
 3000K
 4000K
 6500K



Cronto IP66 250-300W

111331	250 W	36000 lm	144 lm/W	655x230x135 mm	1 pcs
111332	300 W	42300 lm	141 lm/W	655x230x135 mm	1 pcs

Aluminium Injection
 Tempered Glass
 LM80 TM21
 ENEC Driver
 IP65
 DALI Option

1-10V Emergency unit
 3000K
 4000K
 6500K



Cronto IP66 350-400W

111335	350 W	48650 lm	139 lm/W	760x230x135 mm	1 pcs
111336	400 W	54800 lm	137 lm/W	760x230x135 mm	1 pcs

Aluminium Injection
 Tempered Glass
 LM80 TM21
 ENEC Driver
 IP65
 DALI Option

1-10V Emergency unit
 3000K
 4000K
 6500K





Factories & Warehouses Working 7/24

- 5 Years Warranty
- +70.000 Hours Lifetime
- Up to 134lm/W Efficacy
- Aluminium Body
- 4 kv Surge Protection

Etna G2

Narrow angle product codes.

111273	100 W	13300lm	133lm/W	590x86x178	1 pcs
111271	150 W	19950lm	133lm/W	870x86x178	1 pcs
111269	200 W	26800lm	134lm/W	1150x86x178	1 pcs
111258	250 W	33250lm	133lm/W	1430x86x178	1 pcs
111256	300 W	38400lm	128lm/W	1430x86x178	1 pcs

- Aluminium
- Aluminium Reflector
- Tempered Glass
- LM80 TM21
- ENEC Driver
- IP 65
- 3000K
- 4000K
- 6500K
- DALI Option
- Emergency unit
- Wide Angle
- Narrow Angle
- SENSOR Option
- 1-10V



Heavy Industrial Facilities Ta= +70°C

Etna G2 Heavy Industry

Narrow angle product codes.

113466	100 W	13300lm	133lm/W	1200x86x178	1 pcs
113467	200 W	26800lm	134lm/W	1500x86x178	1 pcs

- Aluminium
- Aluminium Reflector
- Tempered Glass
- LM80 TM21
- ENEC Driver
- IP 65
- 3000K
- 4000K
- 6500K
- DALI Option
- Emergency unit
- Wide Angle
- Narrow Angle
- SENSOR Option
- 1-10V



Tempered Filmed Glass and Facilities

Etna G2 Food

Narrow angle product codes.

113336	100 W	13300lm	133lm/W	590x86x178	1 pcs
113338	150 W	19950lm	133lm/W	870x86x178	1 pcs
113340	200 W	26800lm	134lm/W	1150x86x178	1 pcs
113342	250 W	33250lm	133lm/W	1430x86x178	1 pcs
113344	300 W	38400lm	128lm/W	1430x86x178	1 pcs

- Aluminium
- Aluminium Reflector
- Tempered Glass
- LM80 TM21
- ENEC Driver
- IP 65
- 3000K
- 4000K
- 6500K
- DALI Option
- Emergency unit
- Wide Angle
- Narrow Angle
- SENSOR Option
- 1-10V



Frozen & Cold Warehouses Ta= -40°C

Etna G2 Frozen

Narrow angle product codes.

113337	100 W	13300lm	133lm/W	590x86x178	1 pcs
113339	150 W	19950lm	133lm/W	870x86x178	1 pcs
113341	200 W	26800lm	134lm/W	1150x86x178	1 pcs
113343	250 W	33250lm	133lm/W	1430x86x178	1 pcs
113345	300 W	38400lm	128lm/W	1430x86x178	1 pcs

- Aluminium
- Aluminium Reflector
- Tempered Glass
- LM80 TM21
- ENEC Driver
- IP 65
- 3000K
- 4000K
- 6500K
- DALI Option
- Emergency unit
- Wide Angle
- Narrow Angle
- SENSOR Option
- 1-10V



 IK10, High Impact Resistance

 Anti-Glare Design

 HD Broadcast

 Up to 150 lm/W

 Lens Options  30°  60°  90°  asymmetric

 Casambi Option
(Wireless Lighting Control System)



**Flawless Lighting Experience with Neta,
Especially for Professional Sport Fields**



ERL CE

Neta 100W

110684 | 100  | 15000lm | 150 lm/W | 1300x240x75  | 1pcs 



 Metal  LM80  TM21  ENEC  Driver  IP  20  DALI  Option  Emergency  unit  SENSOR  Option

CASAMBI  3000K  4000K  6500K



ERL CE

Neta 150W

110685 | 150  | 21750lm | 145 lm/W | 1300x240x75  | 1pcs 




 Metal  LM80  TM21  ENEC  Driver  IP  20  DALI  Option  Emergency  unit  SENSOR  Option

CASAMBI  3000K  4000K  6500K



ERL CE

Neta 200W

110686 | 200  | 28400lm | 142 lm/W | 1300x240x75  | 1pcs 

 Metal  LM80  TM21  ENEC  Driver  IP  20  DALI  Option  Emergency  unit  SENSOR  Option

CASAMBI  3000K  4000K  6500K



Cost Effective!

- 5 Years Warranty
- Aluminium Body
- +50.000 Hours Lifetime
- Easy Installation
- 125lm/W Efficacy

Hima G2

114394	75 W	9075 lm	121lm/W	585x115x80 mm	1 pcs
111072	75 W	9000 lm	120lm/W	865x115x80 mm	1 pcs
111073	100 W	11500 lm	115lm/W	865x115x80 mm	1 pcs
111066	150 W	17250 lm	115lm/W	1145x115x80 mm	1 pcs

- Aluminium
- Aluminium Reflector
- Tempered Glass
- LM80 TM21
- ENEC Driver
- IP 65
- DALI Option
- Emergency unit
- SENSOR Option
- 3000K
- 4000K
- 6500K



Karpat G2

111105	75 W	8250lm	110lm/W	1200x110x60 mm	2pcs
111766	120 W	13200lm	110lm/W	1200x110x60 mm	2pcs
113479	150 W	19200lm	128lm/W	1500x110x60 mm	2pcs

- Metal
- Aluminium Reflector
- Tempered Glass
- Electronic Ballast
- IP 65
- Emergency unit



Sports Fields! IK10

- Anti-Glare Optic Design for Professional Sports Fields
- High Impact Resistance, IK10
- High Efficacy for More Energy Saving! 130 lm/W
- Wide Power Option 75-300W

Esta

109035	100 W	12960lm	129lm/W	1220x305x75 mm	1 pcs
110728	150 W	18600lm	124lm/W	1220x305x75 mm	1 pcs
109826	230 W	30360lm	132lm/W	1220x305x75 mm	1 pcs

- Metal
- OPAL Diffuser
- METAL Diffuser
- LM80 TM21
- ENEC Driver
- IP 40
- DALI Option
- Emergency unit
- IK10
- LENS Option
- CASAMBI
- 3000K
- 4000K
- 6500K





Anti-Glare Optic Diffuser

- ✂ Pendant Application with Chain
- ☀ Up to 154lm/W Efficacy
- ✂ Easy Installation

Castor G3

114042	75 W	11550lm	154lm/W	272x180 mm	6pcs
114043	100 W	14900lm	149lm/W	272x180 mm	6pcs
114044	150 W	21900lm	146lm/W	323x186 mm	4pcs
114045	200 W	28400lm	142lm/W	323x186 mm	4pcs

Aluminium Injection
 Anti Glare Diffuser
 IP 65
 LM80 TM21
 DALI Option

Emergency unit
 ENEC Driver
 ● 4000K
● 5700K
● 6500K



Cost Effective

- ✂ Pendant Application with Chain
- ☀ +115lm/W Efficacy
- ✂ Easy Installation

Monte G2

110569	100 W	11500lm	115lm/W	272x180 mm	6pcs
110570	150 W	18450lm	123lm/W	323x186 mm	4pcs

Aluminium Injection
 Tempered Glass
 IP 65
 ● 5700K



140lm/W Efficacy!

Different Lens Angle



Sia

109221	150 W	21000lm	140lm/W	342x342x160 mm	1pcs
109554	200 W	25000lm	125lm/W	342x342x160 mm	1pcs

Aluminium injection
 PMMA Lens
 Tempered Glass
 LM80 TM21
 ENEC Driver
 IP 65
 DALI Option
 Emergency unit

● 3000K
● 4000K
● 6500K



140lm/W Efficacy!

Different Lens Angle



Sia Heavy Industry


110603	100 W	14500lm	145lm/W	342x342x123 mm	1pcs
110604	125 W	17500lm	140lm/W	342x342x123 mm	1pcs
110605	150 W	21300lm	142lm/W	342x342x123 mm	1pcs

Aluminium injection
 PMMA Lens
 Tempered Glass
 LM80 TM21
 ENEC Driver
 IP 65
 DALI Option
 Emergency unit

● 3000K
● 4000K
● 6500K



Ta=+70 °C

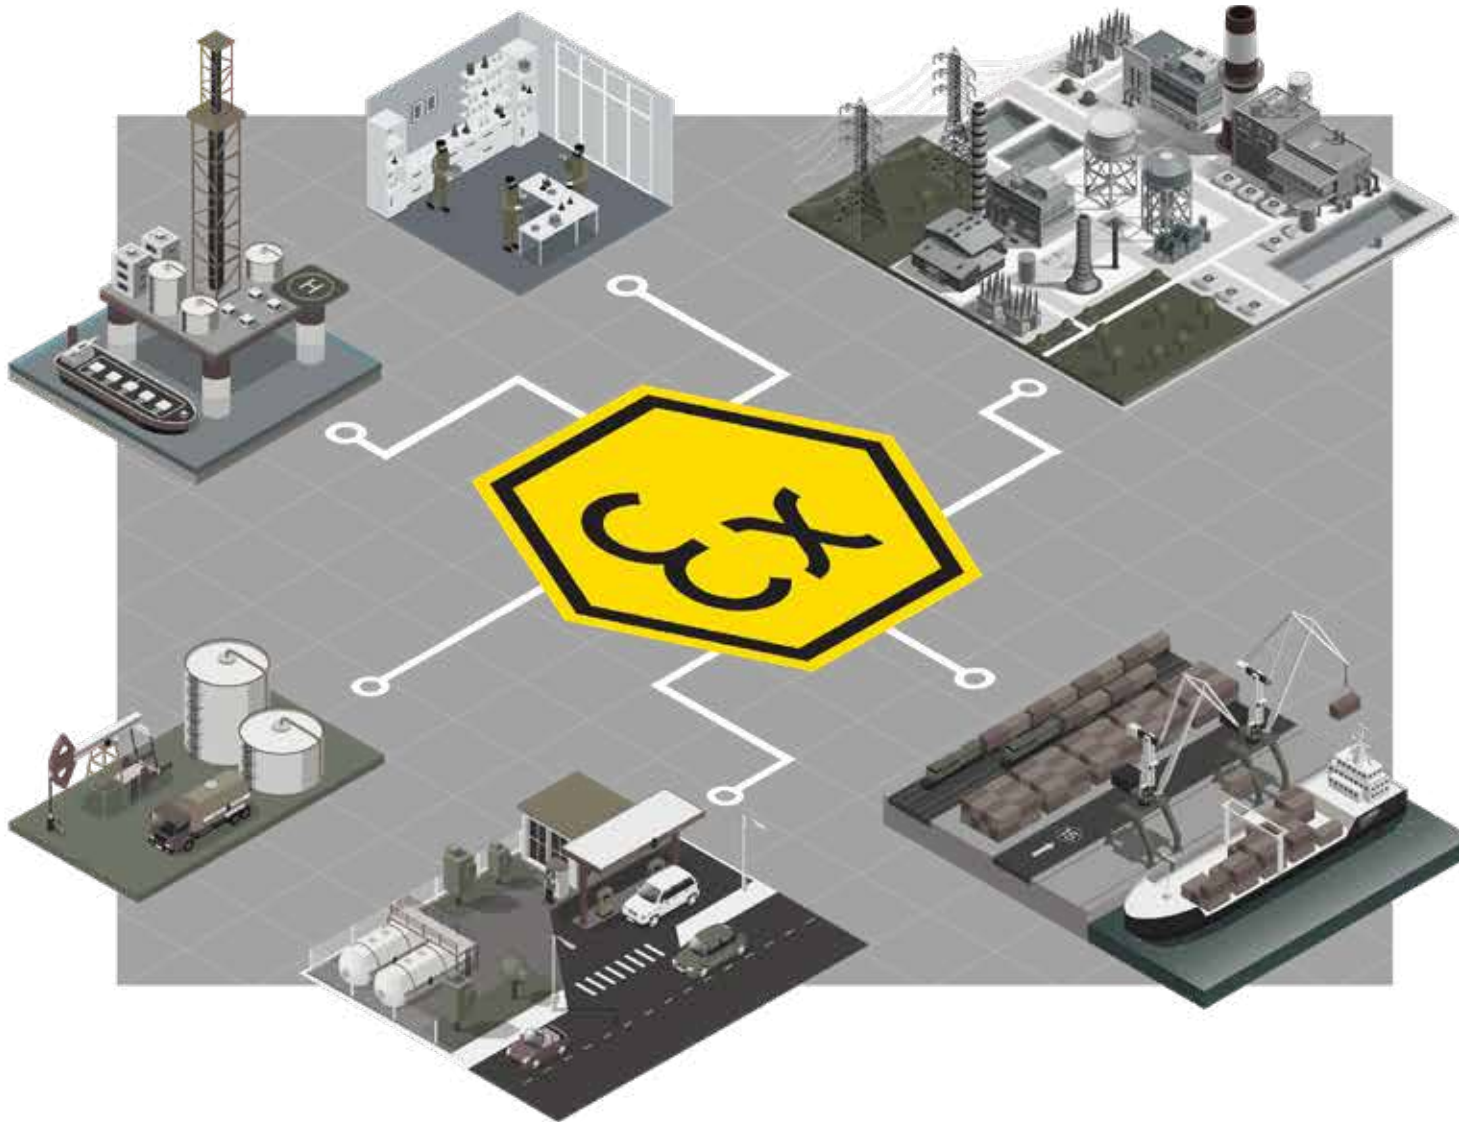

You can safely use Pelsan Ex-Proof Luminaires in chemical and paint facilities, oil storage facilities, oil filling and discharge facilities, ports & shipyards, power plants, industrial facilities and fuel stations!



LED Ex-Proof Waterproof

112894	22 W	6500K	2816 lm	128 lm/W	715x210x142 mm	1pcs
112896	44 W	6500K	5632 lm	128 lm/W	1310x210x142 mm	1pcs
112897	66 W	6500K	8448 lm	128 lm/W	1310x210x142 mm	1pcs



● 3000K ● 4000K ● 6500K



**ZONE 1
ZONE 21**

II 2G Ex db IIB T5 6b
II 2D Ex tb IIIC T100°C Db



LED Ex-Proof Exit

112919	22 W	6500K	715x210x142 mm	1pcs
--------	------	-------	----------------	------



● 3000K ● 4000K ● 6500K



**ZONE 1
ZONE 21**

II 2G Ex db IIB T5 6b
II 2D Ex tb IIIC T100°C Db

Rausled Ex-Proof
Emergency



ZONE 2
ZONE 22

II 3G Ex nR IIC T6 Gc
II 3D Ex tc IIIC T 85° Dc

Ausled Ex-Proof Emergency (3h)

109710 | 15 W | 1500 lm | 100lm/W | 350x117x76 mm | 6pcs

PC Body CLEAR Diffuser LM80 TM21 ENEC Driver IP 65

Surface Mounted - Recessed Mounted



ZONE 2
ZONE 22

II 3G Ex nR IIC T6 Gc
II 3D Ex tc IIIC T 80° Dc

Largo LED Ex-Proof Emergency (3h)

111416 | 25 W | 2750 lm | 110lm/W | 670x85x125 mm | 6pcs
113055 | 45 W | 4950 lm | 110lm/W | 1280x85x125 mm | 6pcs

GRP OPAL Diffuser CLEAR Diffuser LM80 TM21 ENEC Driver IP 65

● 3000K ● 4000K ● 6500K



ZONE 2
ZONE 22

II 3G Ex nR IIC T6 Gc
II 3D Ex tc IIIC T 80° Dc

Largo LED Ex-Proof Waterproof

108458 | 25 W | 2750 lm | 110lm/W | 670x85x125 mm | 6pcs
108459 | 45 W | 4950 lm | 110lm/W | 1280x85x125 mm | 6pcs

GRP OPAL Diffuser CLEAR Diffuser LM80 TM21 ENEC Driver IP 65

● 3000K ● 4000K ● 6500K



ZONE 2
ZONE 22

II 3G Ex nR IIC T6 Gc
II 3D Ex tc IIIC T 80° Dc

Largo LED Tube Ex-Proof Waterproof

111402	1xG13	670x85x125 mm	6pcs
111404	2xG13	670x85x125 mm	6pcs
111405	1xG13	1280x85x125 mm	6pcs
111406	2xG13	1280x85x125 mm	6pcs

GRP OPAL Diffuser CLEAR Diffuser LM80 TM21 ENEC Driver IP 65

● 3000K ● 4000K ● 6500K



ZONE 2
ZONE 22

II 3G Ex nR IIC T6 Gc
II 3D Ex tc IIIC T 80° Dc

Largo T8 Ex-Proof Waterproof

108297	2x18 W	-	G13 TL-D	670x85x125 mm	6pcs
108298	2x36 W	-	G13 TL-D	1280x85x125 mm	6pcs

GRP OPAL Diffuser CLEAR Diffuser LM80 TM21 ENEC Driver IP 65

● 3000K ● 4000K ● 6500K



Elit Lirad Ex-Proof Floodlight

109707 | 50 W | 7000lm | 140lm/W | 200x295x175 mm | 6pcs



● 3000K ● 4000K ● 6500K



II 3G Ex ec IIC T5 Gc
II 3D Ex tc IIIC (T95°C) DC



Nairo Ex-Proof Floodlight

111372	50 W	8250lm	165lm/W	342x342x121 mm	1pcs
111371	75 W	12000lm	160lm/W	342x342x121 mm	1pcs
111370	100 W	15500lm	155lm/W	342x342x121 mm	1pcs
111369	125 W	19000lm	152lm/W	342x342x121 mm	1pcs
111368	150 W	22500lm	150lm/W	342x342x121 mm	1pcs
111055	200 W	28600lm	143lm/W	342x342x121 mm	1pcs



● 3000K ● 4000K ● 6500K



II 3G Ex ec IIC T5 Gc
II 3D Ex tc IIIC (T95°C) DC



Sia Ex-Proof Highbay

111381	50 W	8250lm	165lm/W	342x342x160 mm	1pcs
111380	75 W	12000lm	160lm/W	342x342x160 mm	1pcs
111379	100 W	15500lm	155lm/W	342x342x160 mm	1pcs
111378	125 W	19000lm	152lm/W	342x342x160 mm	1pcs
111377	150 W	22500lm	150lm/W	342x342x160 mm	1pcs
111053	200 W	28600lm	143lm/W	342x342x160 mm	1pcs



● 3000K ● 4000K ● 6500K



II 3G Ex ec IIC T5 Gc
II 3D Ex tc IIIC (T95°C) DC



Piroliz Ex-Proof Canopy

111376	50 W	8250lm	165lm/W	395x395x132 mm	1pcs
111375	75 W	12000lm	160lm/W	395x395x132 mm	1pcs
111374	100 W	15500lm	155lm/W	395x395x132 mm	1pcs
111382	125 W	19000lm	152lm/W	395x395x132 mm	1pcs
111373	150 W	22500lm	150lm/W	395x395x132 mm	1pcs
110056	200 W	28600lm	143lm/W	395x395x132 mm	1pcs



● 3000K ● 4000K ● 6500K



II 3G Ex ec IIC T5 Gc
II 3D Ex tc IIIC (T95°C) DC



Nairo Ex-Proof Street

111367	50 W	8100lm	162lm/W	485x152x352 mm	1pcs
111366	75 W	11775lm	157lm/W	485x152x352 mm	1pcs
111365	100 W	15200lm	152lm/W	485x152x352 mm	1pcs
111364	125 W	18625lm	149lm/W	485x152x352 mm	1pcs
111363	150 W	21900lm	146lm/W	485x152x352 mm	1pcs
111362	200 W	28000lm	140lm/W	485x152x352 mm	1pcs



● 3000K ● 4000K ● 6500K




II 3G Ex ec IIC T5 Gc
II 3D Ex tc IIIC (T95°C) DC


**Cruzo
IP66**

1200W
LED Floodlight

product
video



CB, ENEC Certified

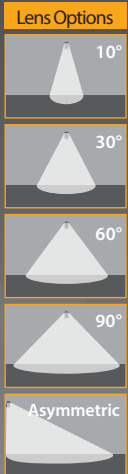

**Specifications of
IP67 Driver**



**ENEC
Certified**



**100.000 h
Driver Lifetime**



**10kV
Internal SPD**




-40°C +55°C



IP67



100-277Vac

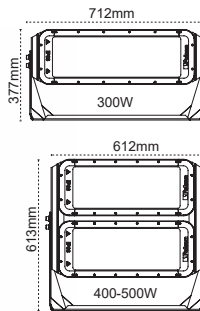

Cruzo IP66 300-500W

110791	300 W	42300 lm	141 lm/W	677x377x226 mm	1 pcs
110792	400 W	58000 lm	145 lm/W	577x613x294 mm	1 pcs
110793	500 W	71000 lm	142 lm/W	577x613x294 mm	1 pcs

- Aluminium injection
- IP66
- Tempered Glass
- LM80 TM21
- ENEC Driver
- 3000K
- 4000K
- 5700K
- 6500K
- 2-Step DIM

CB ENEC EAC



Cruzo IP66 600-800W

110794	600 W	84600 lm	141 lm/W	677x613x294 mm	1 pcs
110795	800 W	115200 lm	144 lm/W	677x824x345 mm	1 pcs

- Aluminium injection
- IP66
- Tempered Glass
- LM80 TM21
- ENEC Driver
- 3000K
- 4000K
- 5700K
- 6500K
- 2-Step DIM

CB ENEC EAC



Cruzo IP66 1000-1200W

110796	900 W	126900 lm	141 lm/W	677x824x345 mm	1 pcs
110797	1000 W	139000 lm	139 lm/W	677x824x345 mm	1 pcs
110798	1200 W	157000 lm	130 lm/W	712x1105x147 mm	1 pcs

- Aluminium injection
- IP66
- Tempered Glass
- LM80 TM21
- ENEC Driver
- 3000K
- 4000K
- 5700K
- 6500K
- 2-Step DIM

CB ENEC EAC

NEW



Ria Lens 400W



Ria Med G2



Ria IP66
Aluminium Reflector



Specifications of IP67 Driver



ENEC
Certified



100.000 h
Driver Lifetime



10kV
Internal SPD



-40°C +55°C




IP67



100-277 Vac



Suitable for highest pole!

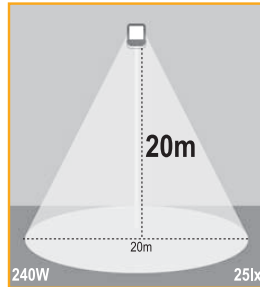


Ria IP66 Symmetric

107140	180 W	23580 lm	131lm/W	400x418x100 mm	1pcs
107141	200 W	24800 lm	124lm/W	400x418x100 mm	1pcs
107130	240 W	28800 lm	120lm/W	400x418x100 mm	1pcs
109218	300 W	37200 lm	124lm/W	400x418x100 mm	1pcs

- Aluminium Injection
- Aluminium Reflector
- Tempered Glass
- LM80 TM21
- ENEC Driver
- IP66
- 3000K 4000K 6500K 2-Step DIM

Symmetric Light Distribution



Ria IP66 Asymmetric


107137	180 W	23580 lm	131lm/W	400x418x100 mm	1pcs
107138	200 W	24800 lm	124lm/W	400x418x100 mm	1pcs
107127	240 W	28800 lm	120lm/W	400x418x100 mm	1pcs

- Aluminium Injection
- Aluminium Reflector
- Tempered Glass
- LM80 TM21
- ENEC Driver
- IP66
- 3000K 4000K 6500K 2-Step DIM

Asymmetric Light Distribution



Suitable for widest areas

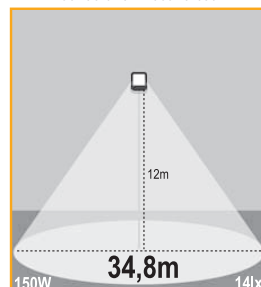


Ria IP66

107121	100 W	11000 lm	110lm/W	400x418x100 mm	1pcs
107124	150 W	15000 lm	100lm/W	400x418x100 mm	1pcs

- Aluminium Injection
- Aluminium Reflector
- Tempered Glass
- LM80 TM21
- ENEC Driver
- IP66
- DALI Option
- 3000K 4000K 6500K 2-Step DIM



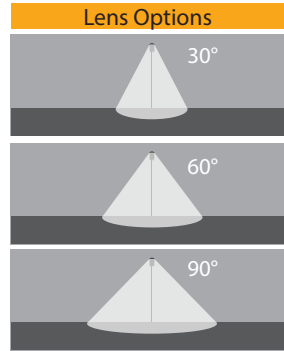

Ria Lens Symmetric

110356	200 W	30800 lm	154lm/W	400x418x100 mm	1pcs
110355	250 W	36500 lm	146lm/W	400x418x100 mm	1pcs
110354	300 W	40500 lm	135lm/W	400x418x100 mm	1pcs
115039	400 W	56000 lm	140lm/W	400x418x100 mm	1pcs

- Aluminium Injection
- Tempered Glass
- LM80 TM21
- ENEC Driver
- IP 66
- DALI Option
- 3000K 4000K 6500K
- 2-Step DIM 1-10V

Symmetric Light Distribution



Ria Lens Asymmetric

110770	200 W	30800 lm	154lm/W	400x418x100 mm	1pcs
110771	250 W	36500 lm	146lm/W	400x418x100 mm	1pcs
110772	300 W	40500 lm	135lm/W	400x418x100 mm	1pcs

- Aluminium Injection
- Tempered Glass
- LM80 TM21
- ENEC Driver
- IP 66
- DALI Option
- 3000K 4000K 6500K
- 2-Step DIM 1-10V


Asymmetric Light Distribution



Ria Tunnel

110443	200 W	28800 lm	144lm/W	400x418x100 mm	1pcs
110444	250 W	34750 lm	139lm/W	400x418x100 mm	1pcs
110445	300 W	40500 lm	135lm/W	400x418x100 mm	1pcs

- Aluminium Injection
- Tempered Glass
- LM80 TM21
- ENEC Driver
- IP 66
- DALI Option
- 3000K 4000K 6500K
- 2-Step DIM 1-10V

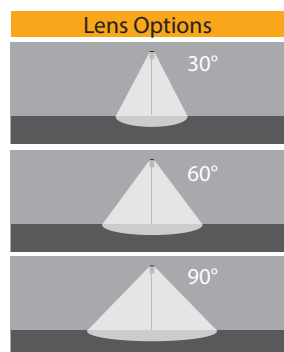

Ria Med G2

111788	60 W	8820 lm	147lm/W	340x274x66 mm	4pcs
111785	80 W	11360 lm	142lm/W	340x274x66 mm	4pcs
111660	100 W	13800 lm	138lm/W	340x274x66 mm	4pcs
111666	150 W	19050 lm	127lm/W	340x274x66 mm	4pcs

- Aluminium Injection
- Tempered Glass
- LM80 TM21
- ENEC Driver
- IP 66
- DALI Option
- 3000K 4000K 6500K
- 2-Step DIM 1-10V






STERIO IP66

Modular Floodlight

Aluminium Injection Body 

IP66, Dust and Waterproof 

IK10 Body 

MODULAR



ERL CE

Sterio IP66 50-100W

109787	50 W	5000 lm	100lm/W	225x195x59 mm	6 pcs
109666	100 W	10000 lm	100lm/W	225x365x85 mm	4 pcs

 Aluminium injection  IK10  IP66  Anti Glare Diffuser

 5700K



ERL CE

Sterio IP66 200-300W

109536	200 W	20000 lm	100lm/W	415x360x85 mm	1 pcs
109537	300 W	30000 lm	100lm/W	415x540x85 mm	1 pcs

 Aluminium injection  IK10  IP66  Anti Glare Diffuser

 5700K



ERL CE

Sterio IP66 450W

109538	450 W	40500 lm	100lm/W	795x390x85 mm	1 pcs
--------	-------	----------	---------	---------------	-------

 Aluminium injection  IK10  IP66  Anti Glare Diffuser

 5700K

Lecto

- W** 50W / 100W / 150W / 200W / 300W
- +** +100lm/W
- Al** Aluminium Injection Body
- M** Metal Cable Glant
- R** Rotary Console, Easy Installation
- A** Air Plug, Maisture Proof



Lecto 50W / 100W

109304	50 W	5000lm	100lm/W	245x190x33 mm	6pcs
109305	100 W	10000lm	100lm/W	320x268x33 mm	4pcs

- Aluminium injection
- Reflector
- Tempered Glass
- IP65
- 5000K

CE



Lecto 150W

109306	150 W	15000lm	100lm/W	348x256x33 mm	6pcs
--------	-------	---------	---------	---------------	------

- Aluminium injection
- Reflector
- Tempered Glass
- IP65
- 5000K

CE



Lecto 200W

111284	200 W	19000lm	95lm/W	420x320x35 mm	4pcs
--------	-------	---------	--------	---------------	------

- Aluminium injection
- Reflector
- Tempered Glass
- IP65
- 5000K

CE



Lecto 300W

114120	300 W	30000lm	100lm/W	470x335x45 mm	4pcs
--------	-------	---------	---------	---------------	------

- Aluminium injection
- Reflector
- Tempered Glass
- IP65
- 5000K

CE

New

Up to
165lm/W



Rio Xs IP66

50W / 60W / 80W / 100W

Aluminium Injection Body, IK09

IP66, Dust and Waterproof

IP67, ENEC Certified Driver

LED Chips Lifetime +100.000 hrs L70@Ts=85°C

IK08 Tempered Glass

Tool Free



Tool Free Design



Adjustable Angle

01

NEMA 7

02

ZHAGA

03

DALI

04

1-10V

05

Time Based DIM

06

External SPD

07

Different Optical Solution



Rio Xs G2 IP66

110975	PLSHA	50 W	7750lm	155lm/W	232x567x106 mm	1pcs
110974	PLSHA	60 W	9900lm	165lm/W	232x567x106 mm	1pcs
110973	PLSHA	80 W	11400lm	143lm/W	232x567x106 mm	1pcs
110972	PLSHA	100 W	15000lm	150lm/W	232x567x106 mm	1pcs

Aluminium injection
 PMMA Lens
 Tempered Glass
 LM80 TM21
 ENEC Driver
 IP66
 IK09

● 3000K
 ● 4000K
 ● 6500K



Rio IP66

- Up to 163lm/W Efficacy
- LED Chip: 100.000 Hours Lifetime
- ENEC Certified LED Driver
- LED Driver: 100.000h Lifetime
- Surge Protection, 10 kV
- Aluminium Injection Body
- 5 Different Console Angles
- Road Lighting Class ME1-ME6



Up to
163lm/W



80-150W

Rio S G2 IP66

109169	PLSHA	80	13040 lm	163lm/W	476x280x110	1 pcs
109171	PLSHA	100	15000 lm	150lm/W	476x280x110	1 pcs
109173	PLSHA	125	18375 lm	147lm/W	476x280x110	1 pcs
116120	PLSHA	140	20300 lm	145lm/W	476x280x110	1 pcs
109175	PLSHA	150	21450 lm	143lm/W	476x280x110	1 pcs

- Aluminium injection
 - PMMA Lens
 - Tempered Glass
 - LM80
 - TM21
 - ENEC Driver
 - IP66
 - IK10
- 3000K ● 4000K ● 6500K



180-200W

Rio M G2 IP66

115166	180	28800lm	160lm/W	616x330x110	1 pcs
115167	200	31600lm	158lm/W	616x330x110	1 pcs

- Aluminium injection
 - PMMA Lens
 - Tempered Glass
 - LM80
 - TM21
 - ENEC Driver
 - IP66
 - IK10
- 3000K ● 4000K ● 6500K



240-300W

Rio L IP66

110784	240	34800lm	145lm/W	727x370x131	1 pcs
110785	270	38610lm	143lm/W	727x370x131	1 pcs
110786	300	42000lm	140lm/W	727x370x131	1 pcs

- Aluminium injection
 - PMMA Lens
 - Tempered Glass
 - LM80
 - TM21
 - ENEC Driver
 - IP66
 - IK10
- 3000K ● 4000K ● 6500K





Doka G2

111793	60 W	8820 lm	147lm/W	362x263x65 mm	4pcs
111795	80 W	11360 lm	142lm/W	362x263x65 mm	4pcs
111797	100 W	13800 lm	138lm/W	362x263x65 mm	4pcs
111799	150 W	19050 lm	127lm/W	362x263x65 mm	4pcs

Aluminium injection
 PMMA Lens
 Tempered Glass
 LM80 TM21
 ENEC Driver
 IP 66

● 3000K
 ● 4000K
 ● 6500K



Berlin

113622	60 W	6600lm	110lm/W	409x165x54 mm	10pcs
114994	80 W	8400lm	105lm/W	409x165x54 mm	10pcs
113623	100 W	10500lm	110lm/W	498x201x73 mm	6pcs
109856	150 W	15750lm	105lm/W	571x248x76 mm	6pcs

Aluminium injection
 PC Diffuser
 IP 65

● 4000K



Video



up to 146lm/W

Photocell

Madrid

109841	20 W	2760lm	138lm/W	324x201x75 mm	6pcs
108494	33 W	4257lm	129lm/W	324x201x75 mm	6pcs
109877	40 W	5840lm	146lm/W	324x201x75 mm	6pcs

Polymer Injection
 PC Diffuser
 LM80 TM21
 ENEC Driver
 IP 65

● 4000K
 ● 6500K



Seul

105979	30 W	2720lm	90lm/W	425x240x170x240 mm	10pcs
--------	------	--------	--------	--------------------	-------

Polymer Inj. Body
 PC Reflector
 PC Diffuser
 LM80 TM21
 ENEC Driver
 IP 65

● 4000K
 ● 6500K



Photocell

Accra Solar





All In One

- 1 No line voltage and cabling
- 2 No monthly electric bills
- 3 All in one solution
- 4 Remote Control




CE



Accra Solar HLO

209010	800lm	450x210x80 mm	4pcs
280644	1200lm	450x210x80 mm	4pcs

- ABS
- 6500K
- IP65
- Mono Crystal Panel
- LifePO4 Battery
- 3day autonomus time
- Photocell
- Motion Sensor



- 1 Mod 1: Motion Sensor
- 2 Mod 2: Low light + Motion sensor
- 3 Mod 3: On/ Off
- 4 Mod 4: Time adjustable / Constant light

Accra Solar

109431	40 W	950lm	487x236x65 mm	6pcs
109432	60 W	1150lm	649x236x65 mm	6pcs

- ABS
- 6500K
- IP65
- Photocell
- Motion Sensor
- LifePO4 Battery
- 2day autonomus time

CE



CE




- 1 Mod 1: On/ Off
- 2 Mod 2: Low I high + Motion sensor
- 3 Mod 3: Time adjustable / Constant light

Accra Solar Floodlights

114064	50 W	355lm	205x158x46 mm	1pcs
114065	100 W	820lm	270x225x70 mm	1pcs

- ABS
- 6500K
- IP65
- Photocell
- LifePO4 Battery
- 2day autonomus time


CE

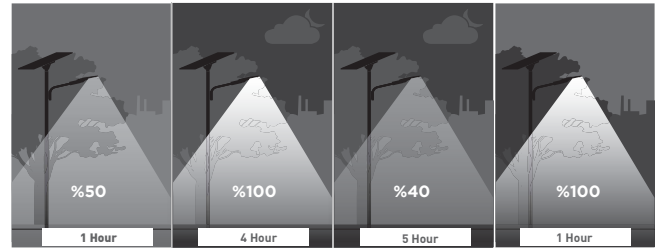

Rio Xs G2 Solar

114957	20 W	2500lm	567x232x106 mm	1 pcs
114958	40 W	5000lm	567x232x106 mm	1 pcs
114981	60 W	7500lm	567x232x106 mm	1 pcs
114960	80 W	10000lm	567x232x106 mm	1 pcs
114961	100 W	12500lm	567x232x106 mm	1 pcs


CE

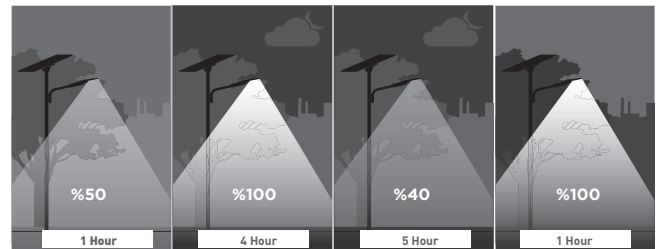

Doka G2 Solar


114962	20 W	2600lm	340x274x66 mm	1 pcs
114963	40 W	5200lm	340x274x66 mm	1 pcs
114964	60 W	7800lm	340x274x66 mm	1 pcs
114965	80 W	10400lm	340x274x66 mm	1 pcs
114966	100 W	12000lm	340x274x66 mm	1 pcs

CE

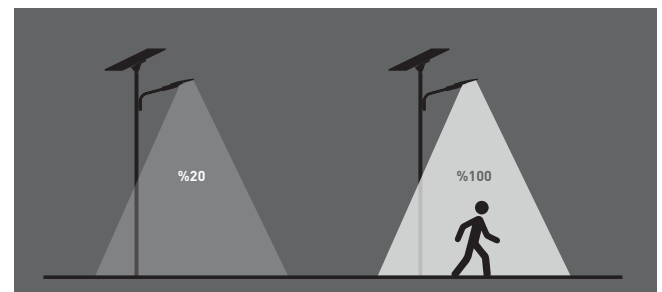




Madrid Solar

114991	20 W	2600lm	324x201x75 mm	1 pcs
114993	40 W	4800lm	324x201x75 mm	1 pcs

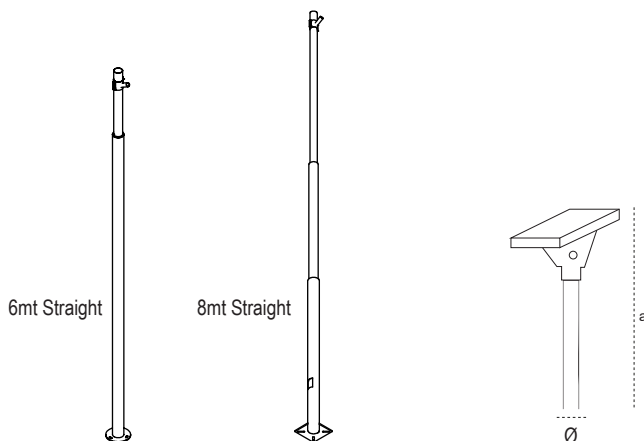

Solar Luminaire Pole

208468	Ø42mm	4m Pole	RAL7043	1 pcs
208469	Ø60mm	4m Pole	RAL7043	1 pcs
208474	Ø42mm	6m Pole	RAL7043	1 pcs
208475	Ø60mm	6m Pole	RAL7043	1 pcs
208476	Ø42mm	8m Pole	RAL7043	1 pcs
208477	Ø60mm	8m Pole	RAL7043	1 pcs

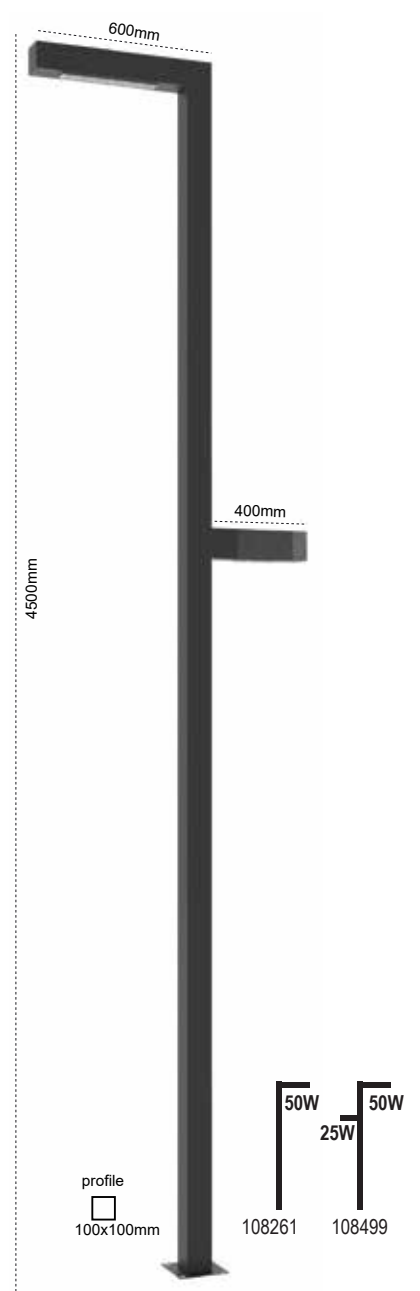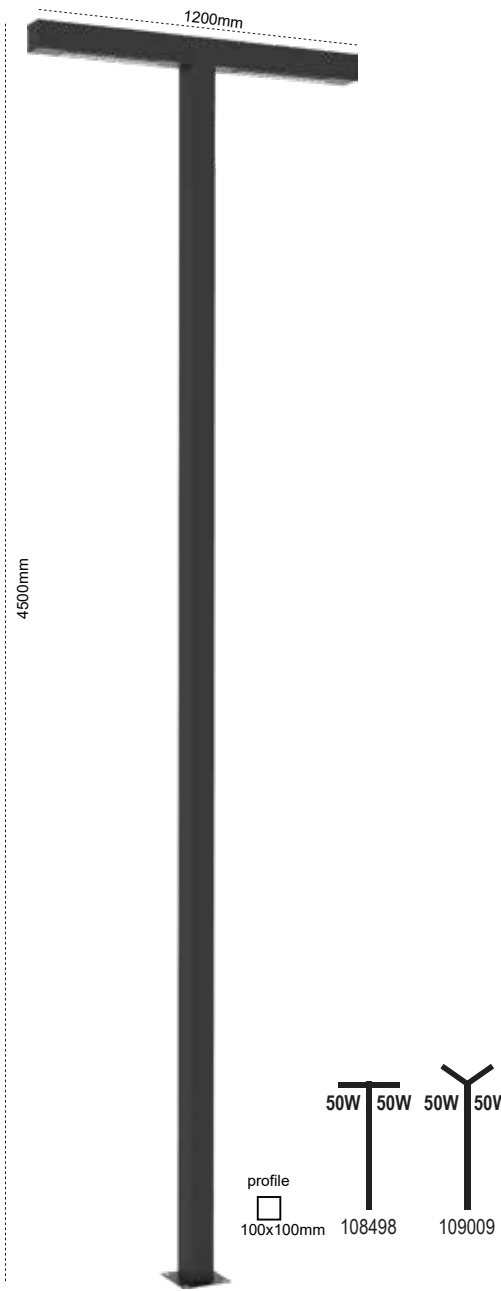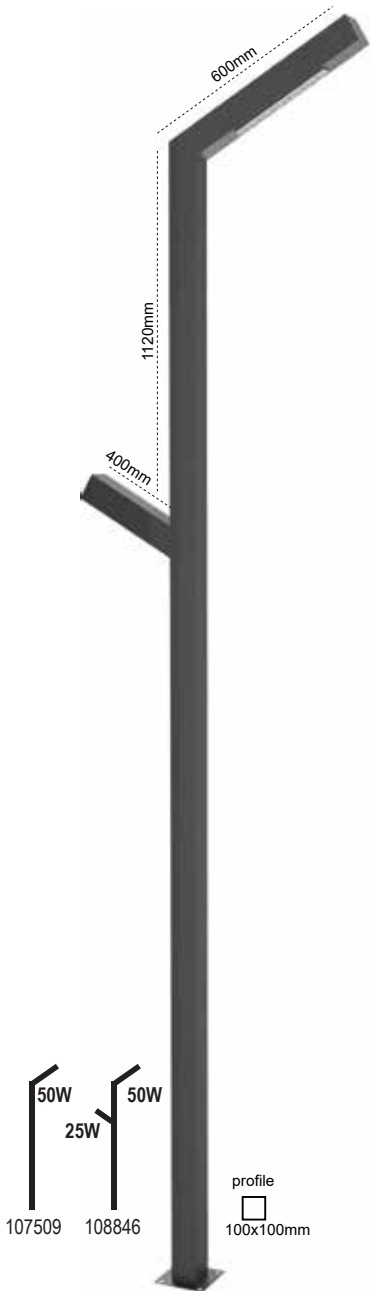

Olimpos


107509	50 W	5850lm	117lm/W	1pcs
108846	50+25 W	8775lm	117lm/W	1pcs

108498	50+50 W	11700lm	117lm/W	1pcs
--------	---------	---------	---------	------

108261	50 W	5850lm	117lm/W	1pcs
108499	50+25 W	8775lm	117lm/W	1pcs

Aluminium PMMA Lens LM80 TM21 ENEC Driver IP 65 3000K 4000K 6500K



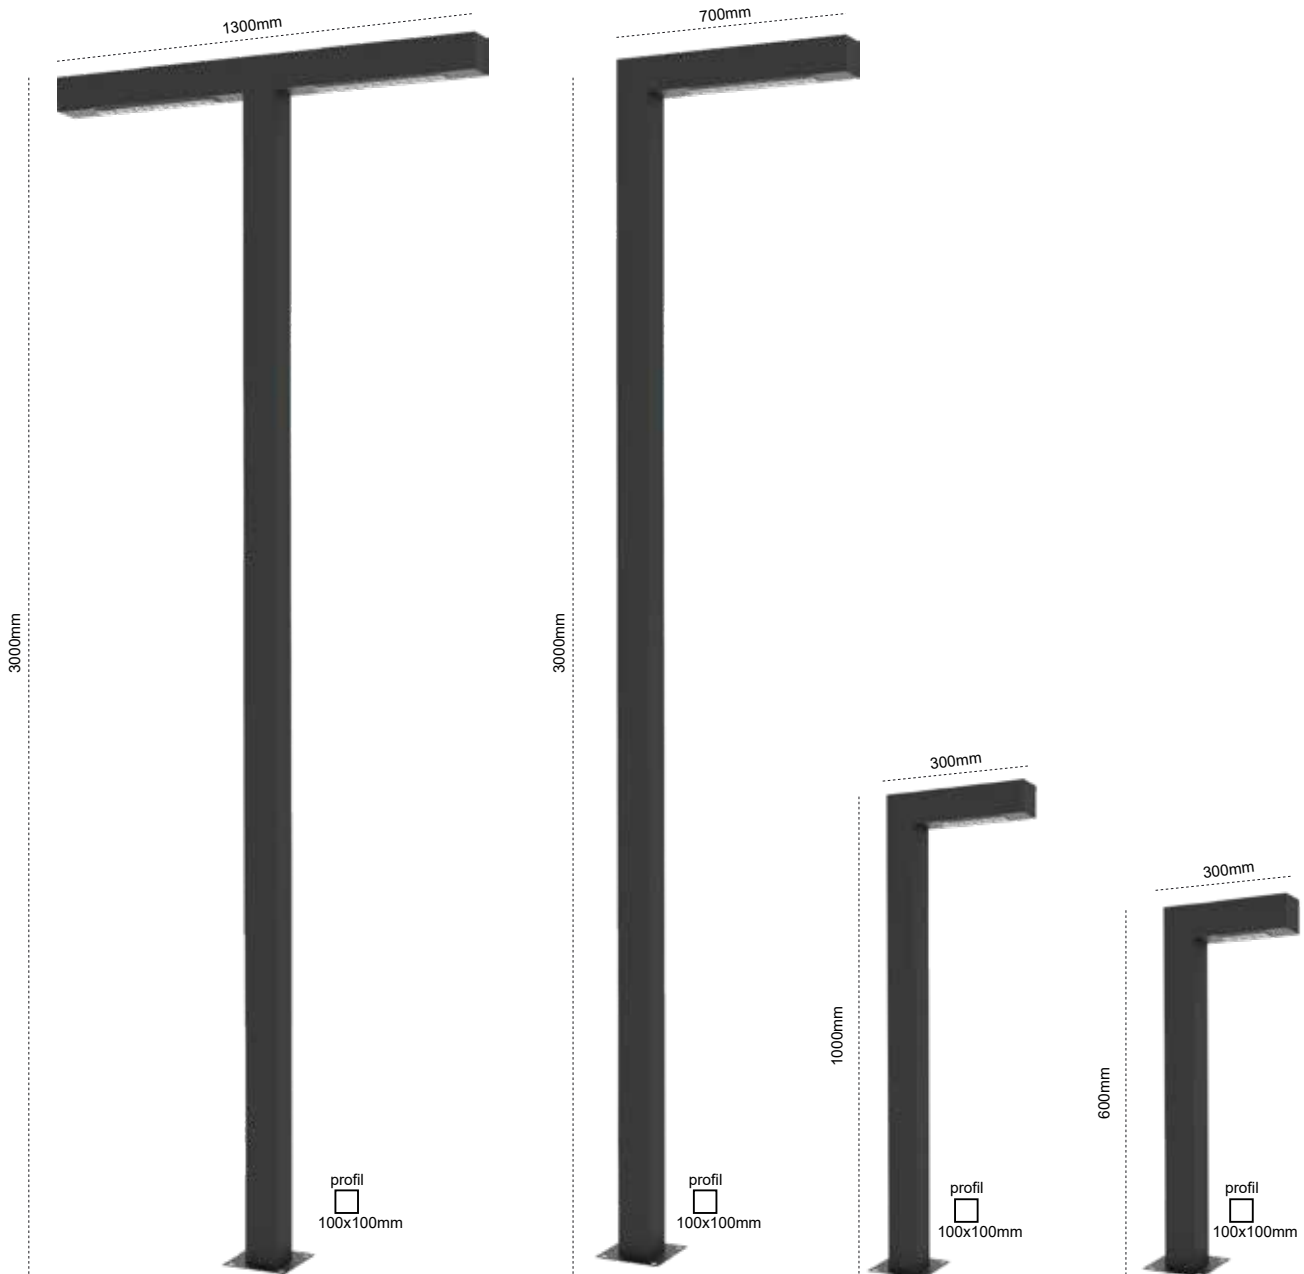

Olimpos Med


206073	Pole	1x30	3300lm	110lm/W	1pc	206074	Bollard	14	1484lm	106lm/W	1pc
206072	Pole	2x30	6600lm	110lm/W	1pc	206075	Bollard	18	1944lm	108lm/W	1pc



Aluminium PMMA Lens LM80 TM21 ENEC Driver IP 65 3000K 4000K 6500K

MesaLED

- W** 60W
- 5280lm**
- Aluminium Body**
- Anti-Glare Special Difusser**

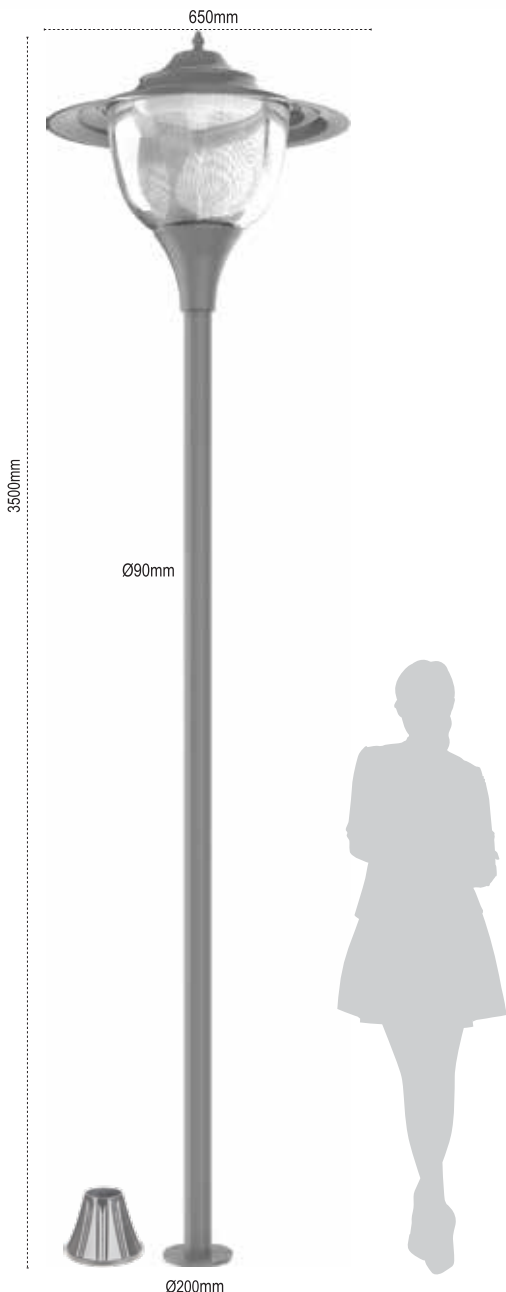

Anti-glare special diffuser

- Prismatic diffuser**
- Anti-glare optic**
- High transmission diffuser**

RAL Code Options

RAL9005 RAL9006 RAL7043

Distance: 20m

Average Luminous Level: 13lx
MesaLED 60W

MesaLED

108609	30 W	2700lm	90lm/W	3500x650x200 mm	1 pcs
108608	60 W	5280lm	88lm/W	3500x650x200 mm	1 pcs

- Aluminium
 - Anti Glare Diffuser
 - LM80
 - TM21
 - ENEC Driver
 - IP 54
- 3000K ● 4000K ● 6500K

Limra



Aluminium Body



Opal Diffuser




Aluminium Reflector





700mm



4500mm

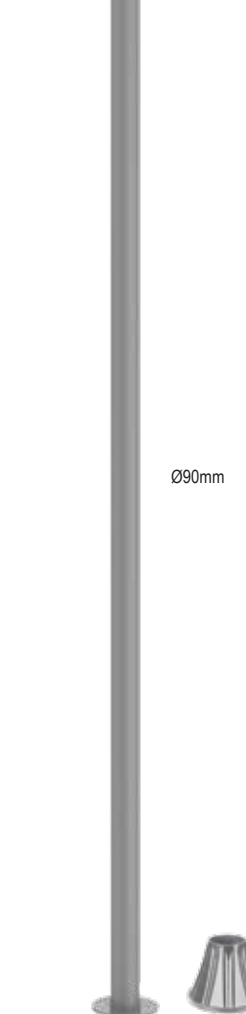

Ø90mm

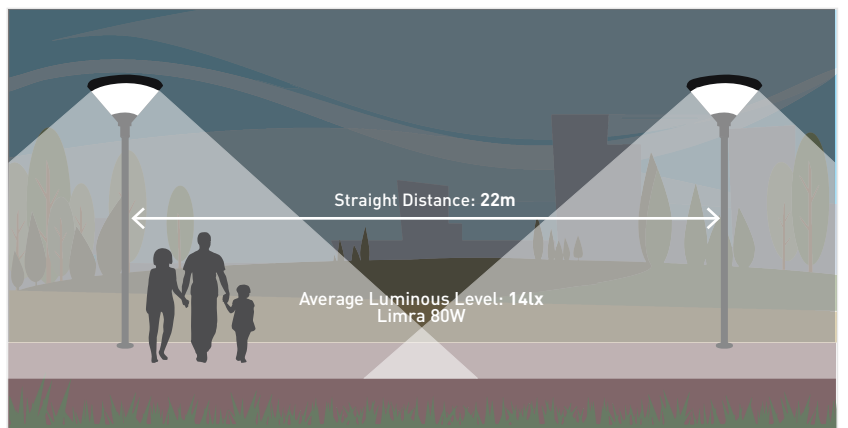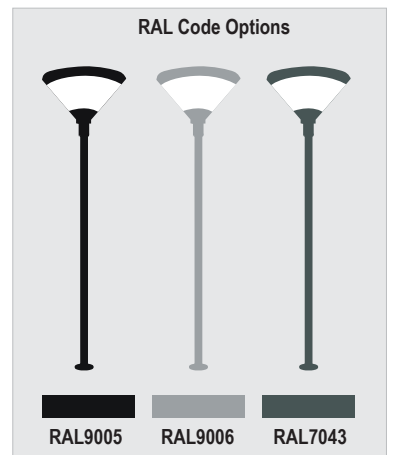


Limra


108606	38 W	2090lm	55lm/W	4500x700 mm	1pcs
108605	80 W	4400lm	55lm/W	4500x700 mm	1pcs

Aluminium OPAL Diffuser LM80 TM21 ENEC Driver IP 54


● 3000K ● 4000K ● 6500K

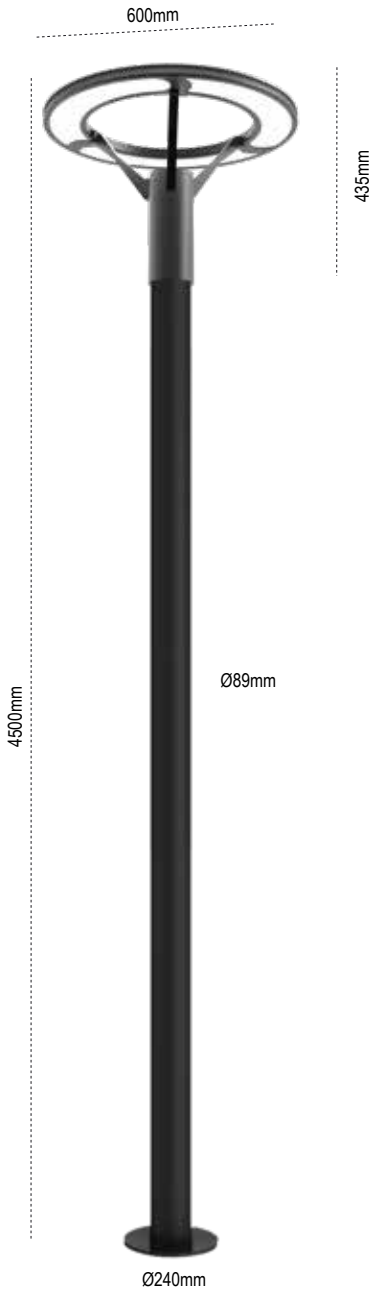

Ø240mm

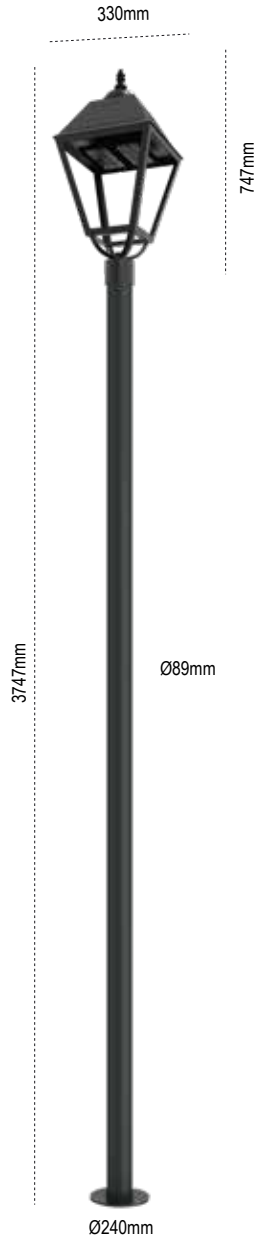

Ø240mm

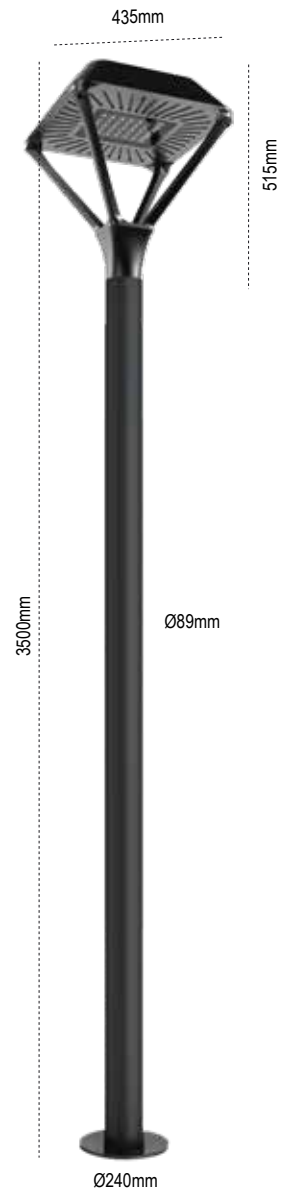

Ø240mm

Troya G2

206776	25 W	1575lm	63lm/W	600x450 mm	1 pcs
206780	50 W	3150lm	63lm/W	600x450 mm	1 pcs
206783	75 W	4725lm	63lm/W	600x450 mm	1 pcs

Aluminium OPAL Diffuser LM80 TM21 ENEC Driver IP 65
 ● 3000K ● 4000K ● 6500K

Karya

206804	25 W	2800lm	112lm/W	330x330x747 mm	1 pcs
206807	50 W	5450lm	109lm/W	330x330x747 mm	1 pcs
206810	75 W	7875lm	105lm/W	330x330x747 mm	1 pcs

Aluminium PMMA Lens LM80 TM21 ENEC Driver IP 65
 ● 3000K ● 4000K ● 6500K

Knidos

206786	25 W	2250lm	90lm/W	435x435x515 mm	1 pcs
206789	50 W	4500lm	90lm/W	435x435x515 mm	1 pcs
206792	75 W	6750lm	90lm/W	435x435x515 mm	1 pcs

Aluminium PMMA Lens LM80 TM21 ENEC Driver IP 54
 ● 3000K ● 4000K ● 6500K




Parion

206813	25 W	2575lm	103lm/W	500x500 mm	1 pcs
206816	50 W	5150lm	103lm/W	500x500 mm	1 pcs
206819	75 W	7725lm	103lm/W	500x500 mm	1 pcs

Aluminium
 PMMA Lens
 LM80 TM21
 ENEC Driver
 IP 65

● 3000K
 ● 4000K
 ● 6500K

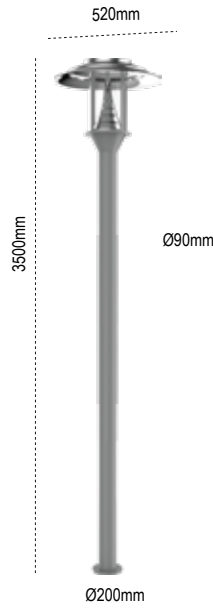


Eva

108610	40 W	3280lm	82lm/W	3500x520x200 mm	1 pcs
--------	------	--------	--------	-----------------	-------

Aluminium
 Aluminium Reflector
 CLEAR Diffuser
 LM80 TM21
 ENEC Driver

● 3000K
 ● 4000K
 ● 6500K
 IP 54

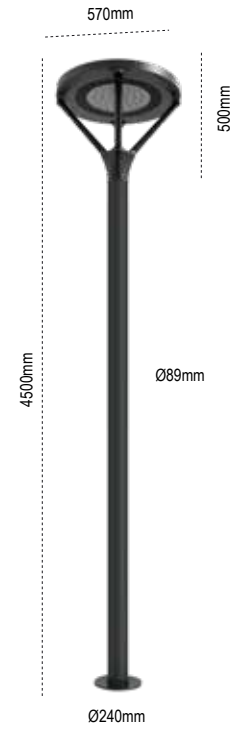


Sardes

206795	25 W	2625lm	105lm/W	570x500 mm	1 pcs
206798	50 W	5100lm	102lm/W	570x500 mm	1 pcs
206801	75 W	7350lm	98lm/W	570x500 mm	1 pcs

Aluminium
 PMMA Lens
 LM80 TM21
 ENEC Driver
 IP 65

● 3000K
 ● 4000K
 ● 6500K

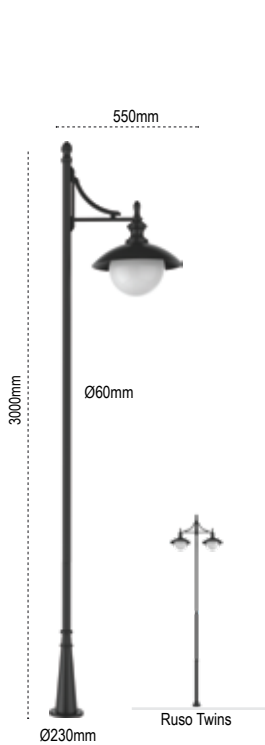


Ruso

107461	E27	3000x550x230 mm	1 pcs
107463	2xE27	3000x550x230 mm	1 pcs

Aluminium
 IP 54

Color Option

- RAL7043
- RAL9005

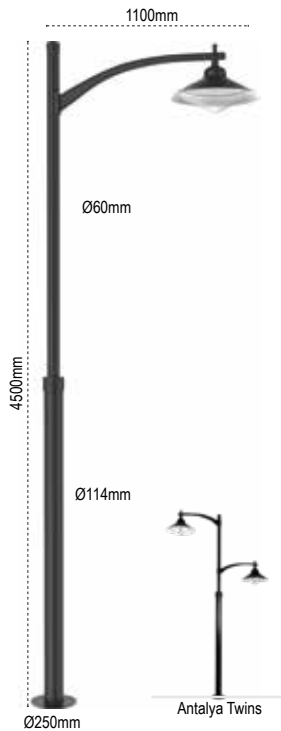

Antalya

107531	E27	4500x540x250 mm	1 pcs
107532	2xE27	4500x540x250 mm	1 pcs

Aluminium
 IP 54

Color Option

- RAL7043
- RAL9005




Pedesa

107530	3xE27	3000x1180x200 mm	1 pcs
--------	-------	------------------	-------

IP 54

Color Option


- RAL7043
- RAL9005

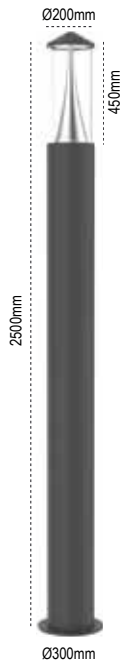

Luzon

109736 | 40 W | 4000lm | 100lm/W | 2500x120x220 mm | 1pcs


Aluminium Aluminium Reflector CLEAR Diffuser LM80 TM21 ENEC Driver
 ● 3000K ● 4000K ● 6500K IP 54

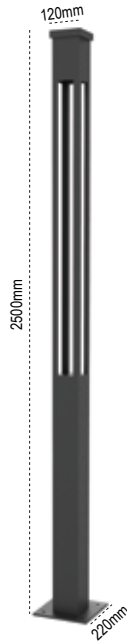

Alinda

107467 | 35 W | 2450lm | 90lm/W | 2500x120x220 mm | 1pcs


Aluminium CLEAR Diffuser LM80 TM21 ENEC Driver
 ● 3000K ● 4000K ● 6500K IP 54

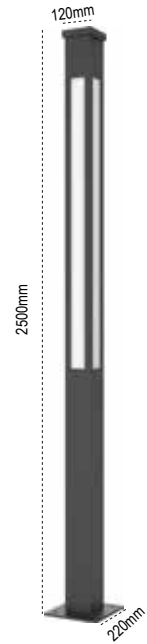

Milas

108500 | 100 W | 2000lm | 2500x120x220 mm | 1pcs


Aluminium OPAL Diffuser LM80 TM21 ENEC Driver IP 54
 ● 3000K ● 4000K ● 6500K

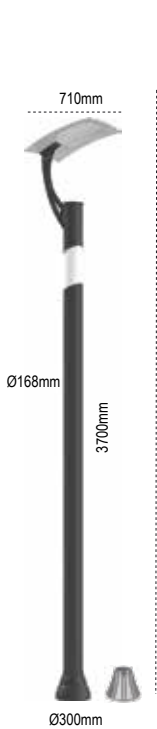

Datça

107628 | 30+40 W | 2600+1200lm | 87+30lm/W | 3700x710 mm | 1pcs
 107619 | 150 W | 12900lm | 86lm/W | 3700x710 mm | 1pcs


Metal Aluminium Reflector OPAL Diffuser LM80 TM21 ENEC Driver IP 65
 ● 3000K ● 4000K ● 6500K

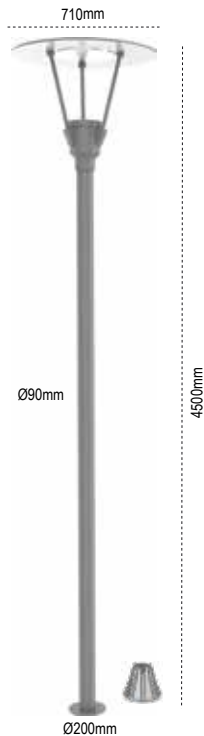

Samos

108612 | 150 W | 2600lm | 52lm/W | 4500x710 mm | 1pcs
 108163 | 50 W | 2600lm | 52lm/W | 4500x710 mm | 1pcs


Metal Aluminium Reflector OPAL Diffuser LM80 TM21 ENEC Driver IP 65
 ● 3000K ● 4000K ● 6500K

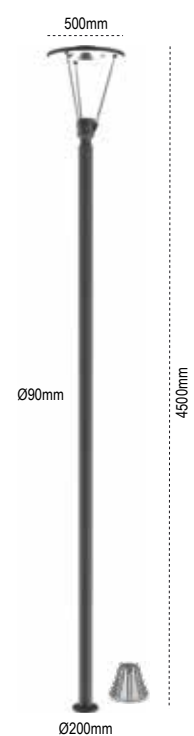


Petra

107882 | 50 W | 4500lm | 100lm/W | 4500x500x200 mm | 1pcs


Aluminium CLEAR Diffuser LM80 TM21 ENEC Driver IP 65
 ● 3000K ● 4000K ● 6500K

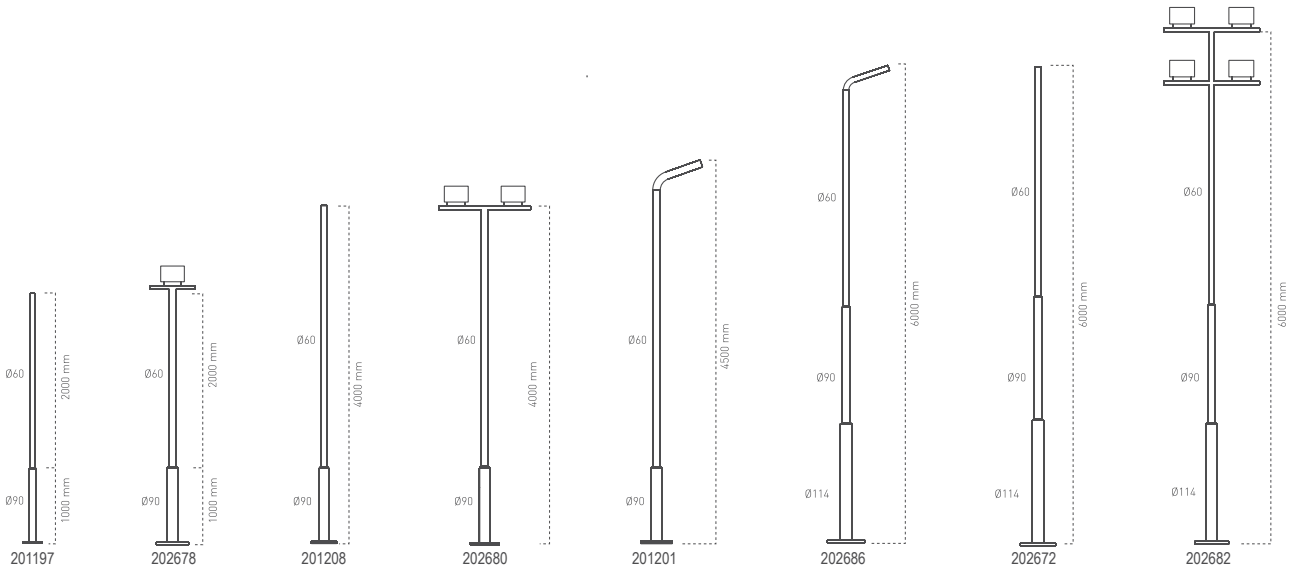

201197	3 m	Stepped Pipe Pole	1pcs	202680	4 m	2 Projector Mast	1pcs	202672	6 m	Stepped Pipe Pole	1pcs
202678	3 m	1 Projector Pipe Mast	1pcs	201201	4,5m	Lamp post	1pcs	202682	6 m	4 Projector Mast	1pcs
201208	4 m	Stepped Pipe Pole	1pcs	202686	6 m	Lamp post	1pcs	312688	Ankraj	250mm Polyester	1pcs

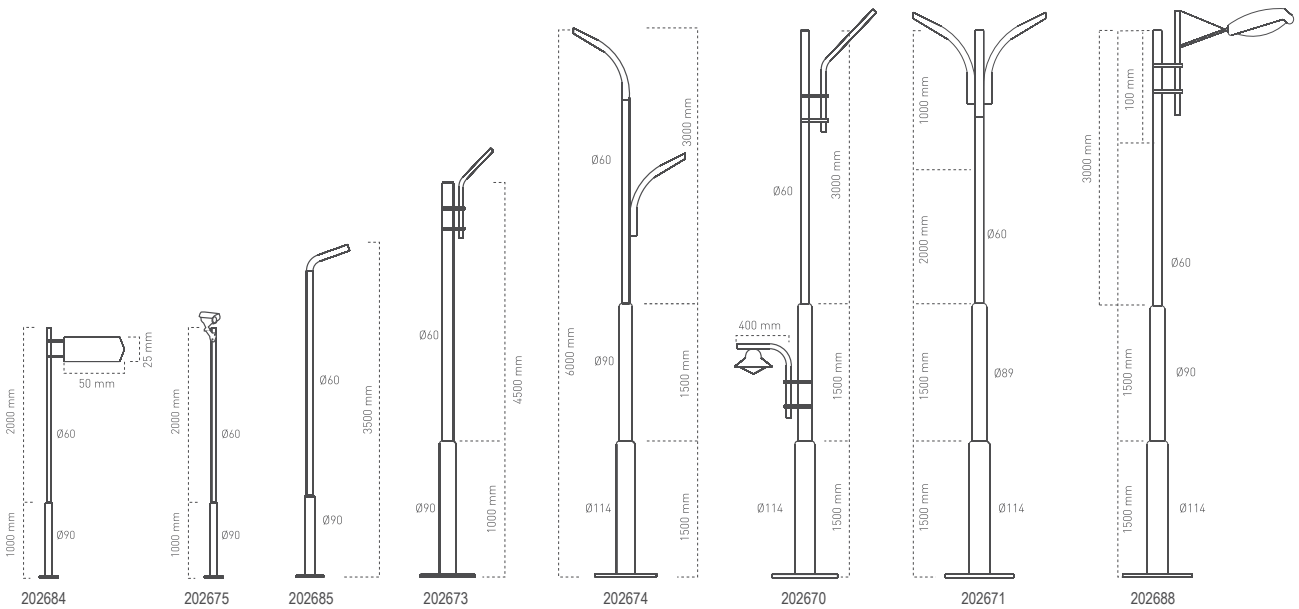


202684	3 m	Street Pole	1pcs	202673	4,5 m	1 x Armature Pole	1pcs	202670	6 m	Double Armature Pole	1pcs
202675	3 m	Camera Pole	1pcs	312688	Ankraj	250mm Polyester	1pcs	202671	6 m	2xConsole Pole	1pcs
202685	3,5 m	Street Lamp Post	1pcs	202674	6 m	2 x Armature	1pcs	202668	6 m	Armature Pole	1pcs
								312688	Ankraj	250mm Polyester	1pcs

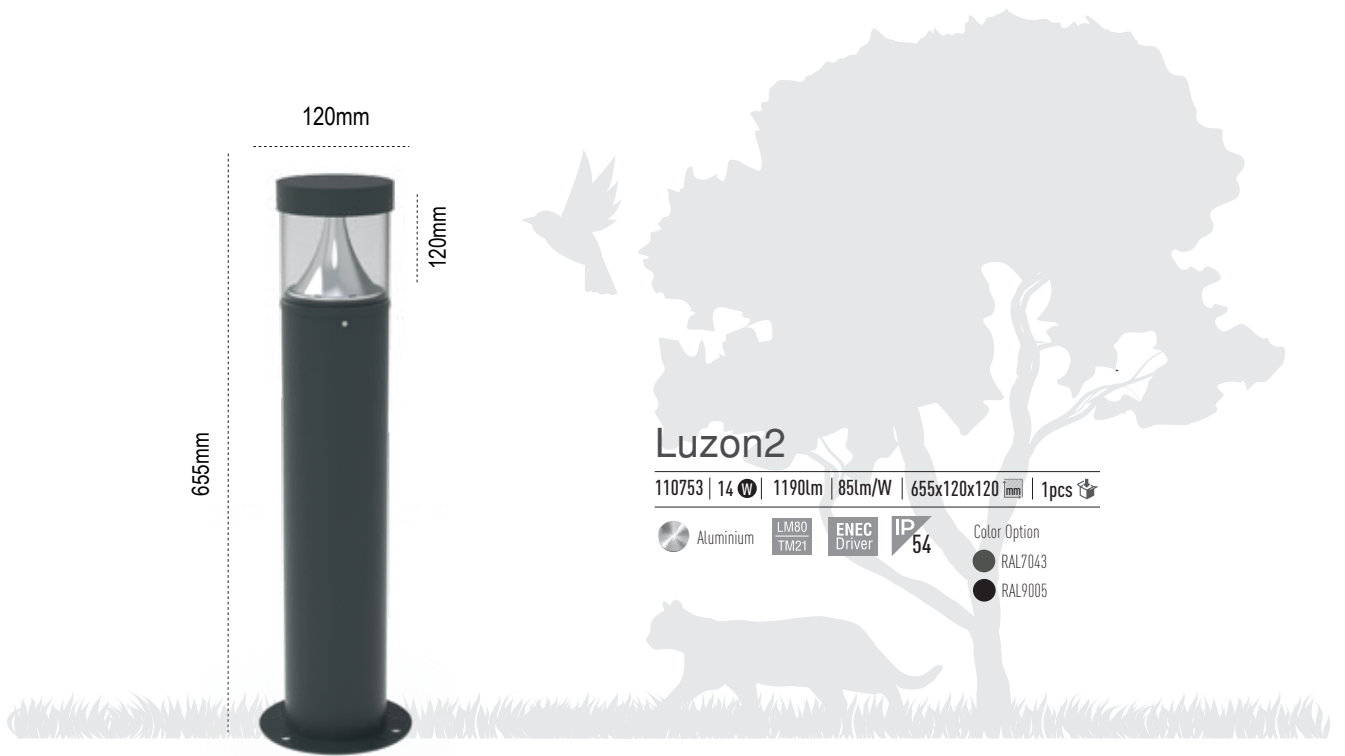

Luzon2

110753 | 14 W | 1190lm | 85lm/W | 655x120x120 mm | 1pcs

- Aluminium
- LM80 TM21
- ENEC Driver
- IP 54
- Color Option
- RAL7043
- RAL9005

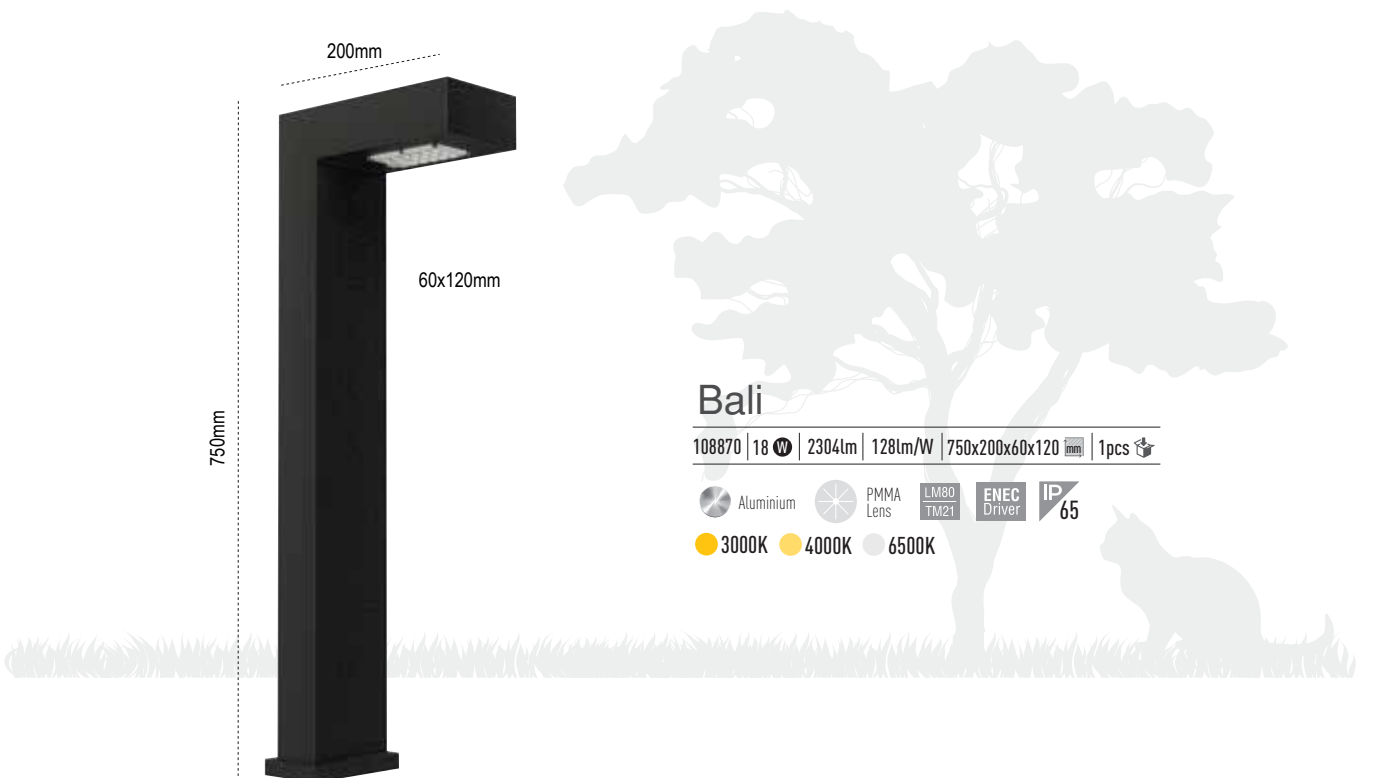

Bali

108870 | 18 W | 2304lm | 128lm/W | 750x200x60x120 mm | 1pcs

- Aluminium
- PMMA Lens
- LM80 TM21
- ENEC Driver
- IP 65
- 3000K
- 4000K
- 6500K



Bali

108870 | 18 W | 2304lm | 1 pcs

Aluminium ENEC Driver IP 65

● 3000K ● 4000K ● 6500K

Malta

108871 | 2x18 W | 4608lm | 1 pcs

Aluminium ENEC Driver IP 65

● 3000K ● 4000K ● 6500K

Maldiv

108872 | 18 W | 2304lm | 1 pcs

Aluminium ENEC Driver IP 65

● 3000K ● 4000K ● 6500K

Santorini

108873 | 2x18 W | 4608lm | 1 pcs

Aluminium ENEC Driver IP 65

● 3000K ● 4000K ● 6500K



Pega

108878 | 18 W | 1962lm | 1 pcs

Aluminium ENEC Driver IP 54

● 3000K ● 4000K ● 6500K

Mayorka

111419 | 18 W | 1280lm | 1 pcs

Aluminium ENEC Driver IP 65

● 3000K ● 4000K ● 6500K

Alinda

108859 | 18 W | 2052lm | 1 pcs

Aluminium ENEC Driver IP 54

● 3000K ● 4000K ● 6500K

Luzon

109027 | 20 W | 2000lm | 1 pcs

Aluminium ENEC Driver IP 54

● 3000K ● 4000K ● 6500K





Alinda

109401-Alinda | 15 W | 1710lm | 114lm/W | 320x180x180 mm | 8pcs

Aluminium ENEC Driver IP54
 ● 3000K ● 4000K ● 6500K



Pega

109403 | 15 W | 1635lm | 109lm/W | 200x310x200 mm | 2pcs

Aluminium IP54



Luzon

109402-Luzon | 15 W | 1500lm | 100lm/W | 310x230x230 mm | 1pcs


Aluminium IP54 IP65 ENEC Driver
 ● 3000K ● 4000K ● 6500K



Tino

109404 | 1xE27 | - | - | 170x310x170 mm | 8pcs

Aluminium IP54

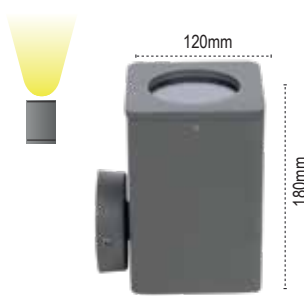

Işılay 1

110742 | E27 | 120x180x195 mm | 6pcs


Aluminium IP54



Işılay 2

110743 | 2xE27 | 120x300x195 mm | 6pcs

Aluminium IP54

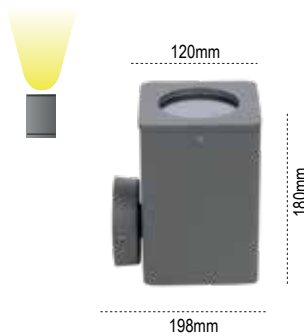

Tibat 1

110744 | E27 | 198x180x120 mm | 6pcs

Aluminium IP54



Tibat 2

110745 | 2xE27 | 198x305x120 mm | 6pcs

Aluminium IP54

Erbaled

109359 | 10 W | 900lm | 90lm/W | 70x90x200 mm | 8pcs
 205288 Stud Bracket 21cm | 10pcs


GRP | Clear Glass | LM80 TM21 | ENEC Driver | IP 65



Erbaled

109486 | 10 W Amber | 400lm | 40lm/W | 70x90x200 mm | 8pcs
 109485 | 10 W Green | 400lm | 40lm/W | 70x90x200 mm | 8pcs
 205288 Stud Bracket 21cm | 10pcs


GRP | Clear Glass | LM80 TM21 | ENEC Driver | IP 65

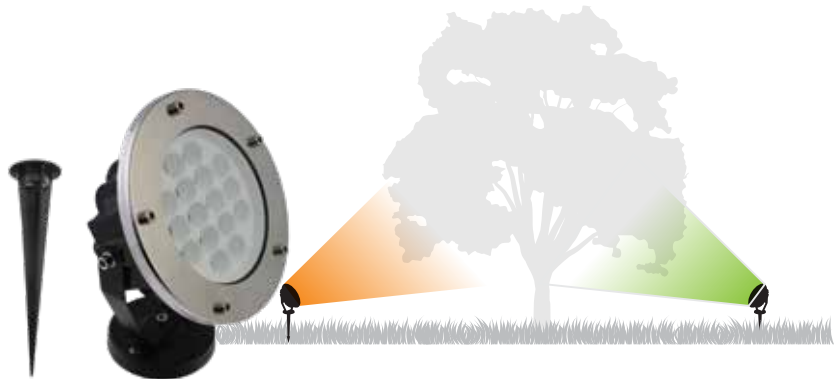

Erbaled

110818 | 10 W Blue | 400lm | 40lm/W | 70x90x200 mm | 8pcs
 109550 | 10 W Red | 400lm | 40lm/W | 70x90x200 mm | 8pcs
 205288 Stud Bracket 21cm | 10pcs

GRP | Clear Glass | LM80 TM21 | ENEC Driver | IP 65

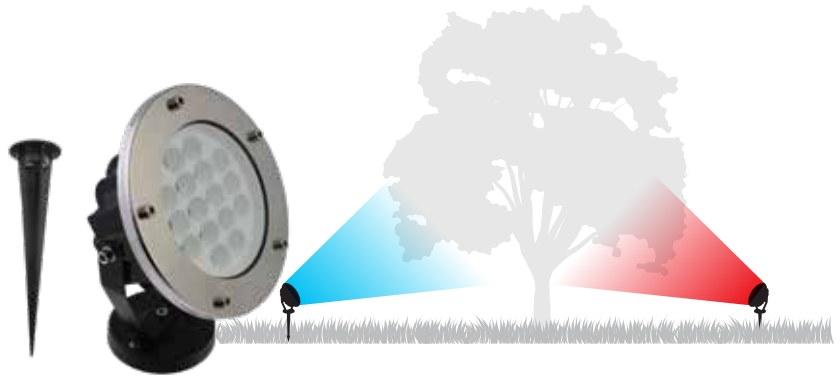

Santa

206822 | 15 W | 2100lm | 140lm/W | 283x185x101 mm | 1pcs
 206825 | 25 W | 3500lm | 140lm/W | 283x185x101 mm | 1pcs
 206828 | 37 W | 5180lm | 140lm/W | 283x185x101 mm | 1pcs

Aluminium | Clear Glass | LM80 TM21 | ENEC Driver | IP 65



Inovaled G2



Air Ventilated

Gland Keeping
Out The
Moisture



IP66
Dust and Waterproof



IK08



**Tempered
Glass**



**Aluminium
Body**



Inovaled G2 35cm

113292 | 14 W | 45+20° | 1540lm | 110lm/W | 350x72x59 mm | 4pcs

Aluminium | PMMA Lens | LM80 TM21 | ENEC Driver | IP66

Color Options



Different Lens Angle 45°+20°



Inovaled G2 65cm

113320 | 28 W | 45+20° | 3080lm | 110lm/W | 650x72x59 mm | 4pcs

Aluminium | PMMA Lens | LM80 TM21 | ENEC Driver | IP66

Color Options



Different Lens Angle 45°+20°



Inovaled G2 95cm

113328 | 42 W | 45+20° | 4620lm | 110lm/W | 945x72x59 mm | 4pcs

Aluminium | PMMA Lens | LM80 TM21 | ENEC Driver | IP66

Color Options



Different Lens Angle 45°+20°





LED Tube

314663	9 W	G13	950 lm	105lm/W	602x26 mm	25pcs
314664	9 W	G13	950 lm	105lm/W	602x26 mm	25pcs
314665	18 W	G13	1900 lm	100lm/W	1214x26 mm	25pcs
314666	18 W	G13	1900 lm	105lm/W	1214x26 mm	25pcs
314668	22 W	G13	2220 lm	101lm/W	1510x26 mm	25pcs
314669	22 W	G13	2220 lm	101lm/W	1510x26 mm	25pcs

Glass
 A+
 180°
 CRI-80
 30000h
 20000
 Single Side




Pro LED Tube

323524	22 W	6500K	G13	2970 lm	135lm/W	1510x26 mm	25pcs
--------	------	-------	-----	---------	---------	------------	-------

Glass
 A+
 180°
 CRI-80
 30000h
 20000
 Single Side


+135 lm/W

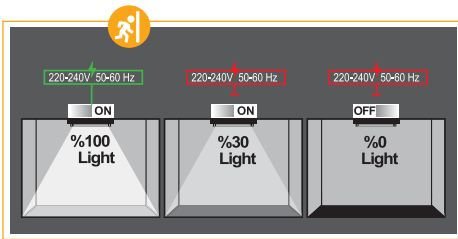

Emergency LED Tube (1,5h)

315116	18 W	6500K	G13	1450 lm	80lm/W	1214x26 mm	25pcs
--------	------	-------	-----	---------	--------	------------	-------

Glass
 A+
 180°
 CRI-80
 30000h
 20000
 Double Side

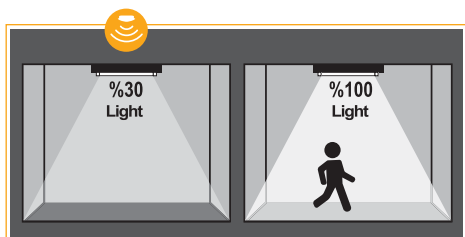

LED Tube with Sensor

315114	18 W	6500K	G13	1830 lm	101lm/W	1212x26 mm	25pcs
315115	18 W	6500K	G13	1500 lm	83lm/W	1212x26 mm	25pcs

Glass
 A+
 180°
 CRI-80
 30000h
 20000
 Double Side

ATEX Certificate



Turkish Accreditation Certificate



EAC Certificate



Office Luminaires



Downlights



Emergency Luminaires



Emergency Lighting and Monitoring Luminaires



Waterproof Luminaires



Highway Luminaires



Floodlights



Road and Street



New
Architectural Lighting
Brand



recta

art and light

www.rectalighting.com

Pelsan



All your lighting needs in one address.
Tüm aydınlatma ihtiyaçlarınız için tek adres.

www.pelsan.com.tr
info@pelsan.com.tr | export@pelsan.com.tr

HEAD OFFICE
GENEL MERKEZ

Çerkeşli O.S.B.
İmes 5. Cadde No:12
Dilovası / Kocaeli - TÜRKİYE



/PelsanAydınlatma



pelsan-aydinlatma



pelsan aydinlatma



/pelsanaydinlatma



/PelsanLight

T : +9(0850) 460 75 76

F : +9(0216) 364 60 15