


Park and Garden Luminaires

Park Bahçe Direk Armatürleri

Pila

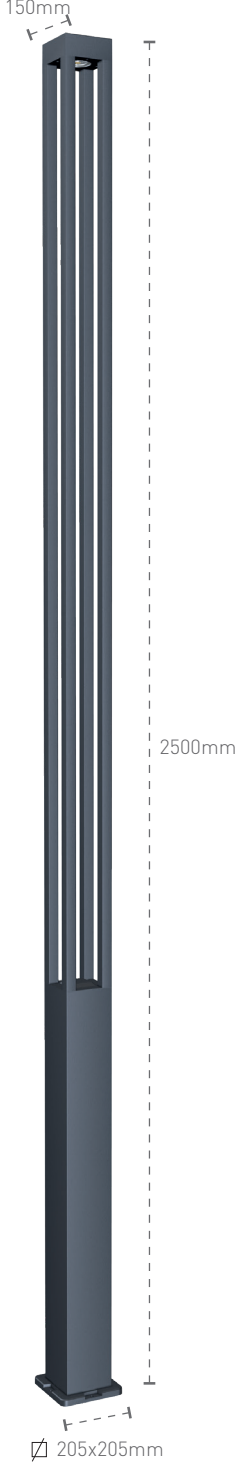

Mechanical Specifications

Mekanik Özellikler

Body	Gövde	Aluminium	Alüminyum
Pole	Direk	Aluminium	
IP Rating	IP Sınıfı	IP65	
IK Rating	IK Gövde Sınıfı	IK08	
Fire Protection	Alev Koruması	-	
Cable Gland	Kablo Rakor	-	
Cable	Kablo	3x1mm ²	
RAL Code	Ral Kodu	9005 / 9016 / 7043 / 7016	
Mounting Type	Montaj Tipi	Pole	Direk



Optical Specifications

Optik Özellikler

Light Source	Işık Kaynağı	High Power LED	
Reflector	Reflektör	-	
Lens	Lens	-	
Diffuser	Difüzör	Tempered Glass	Temperli Cam
CRI		>70	
Colour Temperature	Renk Sıcaklığı	3000K / 4000K / 6500K	
Photobiological Risk Group	Fotobiyolojik Risk Grubu	RG1	
Beam Angle	Işık Açısı	120°	



Electrical Specifications

Elektriksel Özellikler

Input Voltage	Giriş Gerilimi	220-240Vac	
Frequency	Frekans	50-60Hz	
Class	Sınıf	I	
System Lifetime	Sistem Ömrü	>50.000h	
Power Factor	Güç Faktörü	>0,95	
Operating Temperature	Çalışma Sıcaklığı	-20°C / +50°C	
Standards	Standartlar	EN 60598-2-1	



Options

Opsiyonlar

DALI		✓	
1-10V		✓	
Step DIM		-	
1hour Emergency Kit	1 Saat Acil Kit	-	
3hour Emergency Kit	3 Saat Acil Kit	-	
Electrical Protection	Elektriksel Sınıf	-	
Microwave Sensor	Radar Sensör	-	
RAL Code	RAL Kodu	✓	
Marine Painting	Marin Boya	✓	

Code No Ürün Kodu	Power Güç (W)	Luminous Flux Işık Akısı (lm)	Colour Temp. Renk Sıcaklığı (K)	Efficacy Etkinlik Faktörü (lm/W)	Dimensions Boyutlar (mm) axbxc	Pcs / Pack Koli Adedi	Package Weight Koli Ağırlığı (kg)
212309	20	2000	3000	100	120x165x2000	1	9
212310	30	3000	3000	100	150x205x2500	1	10,5

Product codes can change by the kelvins, dimensions, or options. Please get in contact with the sales team.

Technical values has tolerance +/-7 by the operating conditions.

Ürün kodları kelvin, boyut ve opsiyonlar için değişebilir. Lütfen satış ekibi ile iletişime geçiniz.

Teknik sonuçlar çalışma koşullarına bağlı olarak +/-7 toleransa sahiptir.

Technical Drawing

Teknik Çizim

Technical drawing of a square plate with a central hole and four mounting tabs. The drawing includes a side view and a top view.

Dimensions:

- Outer square side: 104
- Inner square side: 102
- Central hole diameter: $\varnothing 16.5$
- Mounting tab width: 10
- Mounting tab height: 10
- Distance between mounting tab centers: 102
- Distance from mounting tab center to outer edge: 10

