


Davos Park Bahçe Armatürler

Davos Park and Garden Luminaires

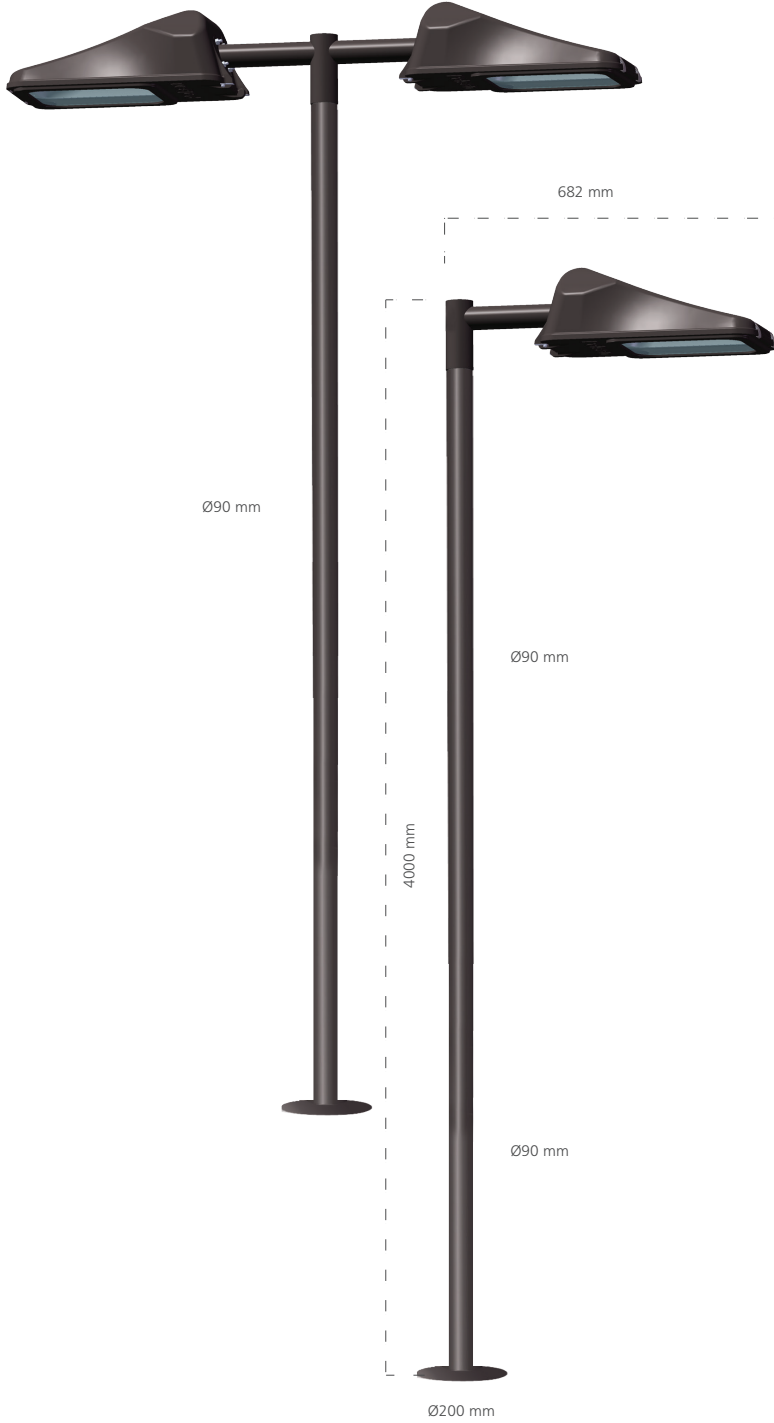

Mekanik Özellikler

Isı değişiminden etkilenmeyen cam elyaf katkılı fibreglas gövde. Elektrostatik polyester toz boyalı metal direk. Contalı kapak içerisinde sigorta bağlantı terminali. Paslanmaz çelik bağlantı elemanları. Isı değişimine ve çevre şartlarına uygun silikon conta

Optik Özellikler

Eloksal kaplı yüksek saflıkta alüminyum reflektör. IK 08 koşullarını sağlayan, ısıya ve darbelere karşı korumalı, yüksek geçirgenliğe sahip, şeffaf temperli cam. Asimetrik ışık dağılımı

Elektriksel Özellikler

EN 60923 - EN 61347-2-9 standartlarına uygun düşük güç kayıplı manyetik balast. EN 61347-2-1 standardına uygun seri ateşleyici. EN60238 standardına uygun duy. 1,5mm² kesitli bakır üzeri silikon kaplı kablo. Ortam sıcaklığında sorunsuz olarak çalışabilecek şekilde tasarlanmış teçhizat bölümü

Opsiyonlar

Isıl anahtarlı manyetik balast uygulaması. Zaman ayarlı seri ateşleyici uygulaması. Gün ışığına duyarlı fotosel uygulaması. Kademeli manyetik balast uygulaması

Mechanical Specifications

Thermal resistant glass fibre reinforced plastic frame. Pole with electrostatic polyester powder coating . Fuse connection terminal enclosed under sealed cover. Stainless steel fittings. Silicone gasket fit for temperature changes and environmental conditions

Optical Specifications

High purity aluminium reflector with metalized coating. IK08 standard compliant, heat and impact resistant, highly transmissive, clear tempered glass. Asymmetrical luminous distribution

Electrical Specifications

EN 60923 - EN 61347-2-9 standards compliant low-loss magnetic ballast. EN60238 standard compliant lamp holder. 1,5mm² cross-sectioned silicone coated copper cable. Hardware compartment designed to function flawlessly under ambient temperature

Options

Magnetic ballast with thermal cut-out application. Timer series igniter application. Daylight sensitive photocell application. Adjustable magnetic ballast application

Kullanım Alanları

Fields of Application



Armatürlere ait büyüklükler Product Details

Ürün Kodu Code No	Tip Type	Güç Power (W)	Akım Current (A)	Lamba Tipi Lamp Type	Işık Akısı Luminous Flux (lm)	Ağırlık Weight (kg)	Duy Base	Balast Tipi Ballast Type
5723 1411	Davos	150	1.8	SON-T	14000	24	E40	Magnetic
5723 1421	Davos	250	3	SON-T	32000	26	E40	Magnetic
5723 1411	Davos	150	1.8	HPI-T	12000	24	E40	Magnetic
5723 1421	Davos	250	3	HPI-T	19000	26	E40	Magnetic
5723 1412	Davos	150	1.8	MHN-TD	11000	24	RX7s	Magnetic
5723 1422	Davos	250	3	MHN-TD	20000	26	FC2	Magnetic